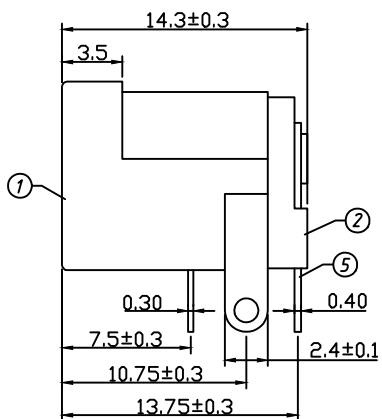
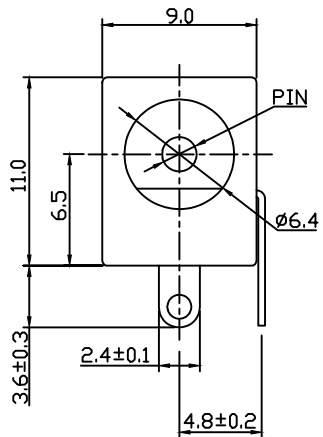


SPECIFICATION

Rated Load:DC 30V 5A

Contact resistance:30mΩ, max

Insulation resistance:100MΩ, min




Withstand Voltage:AC500V

Actuating Force:3~20N



Life:5000 cycles

Operating Temperature:-30℃~70℃

PCB Layout Top View

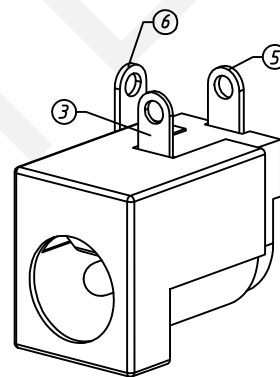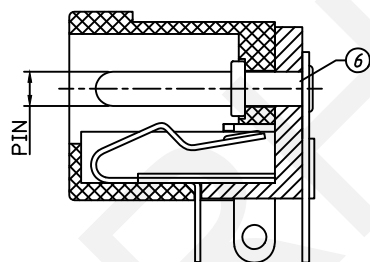

SCHEMATIC

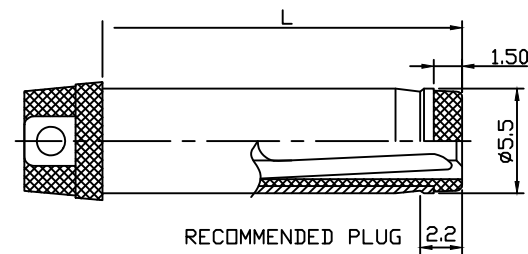

PIN	Ø2.0	Ø2.5
APPD		

NO.	Description	QTY	Material	Plating
1	Housing	1	LCP	---
2	Cover	1	LCP	---
3	Spring Piece	1	Bronze	Sn-Plating
4	Curve Piece	1	Brass	Sn-Plating
5	Flat Foot	1	Brass	Sn-Plating
6	Pin	1	Brass	Ni-Plating



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

30V 5A DC Jack DIP

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAYDC-005A