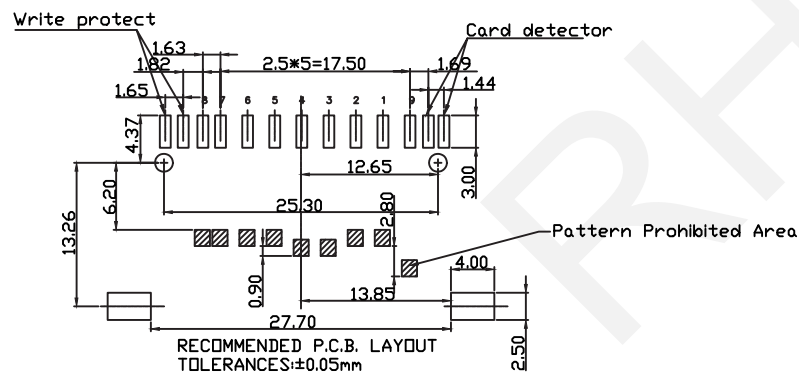

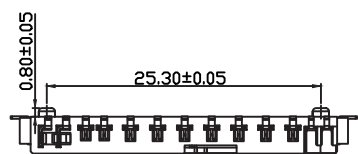
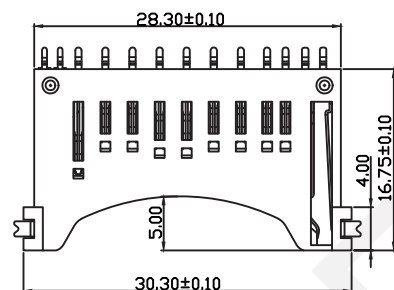
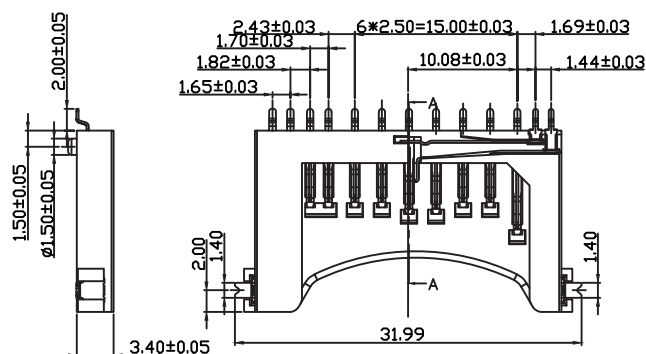


Material:

Insulator: Thermal Plastic UL94V-0

Contacts: Copper Alloy

Specification:


Current rating: 1Amps Max

Contact resistance: 100mΩ Max.

Insulation resistance: 1000MΩ Min.

Mating Cycle: 10000 Cycles Minute.

Operating temperature: -40°C ~ +85°C

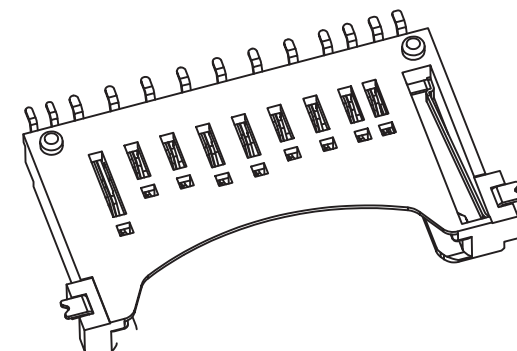

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

DRWN BY PAN

CF Cards*SIM Cards*TF Cards*SD Cards


0~3 3~18 18~50 50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12 ±0.15 ±0.3 ±0.5

APPR BY ZHAN



RHTAYF-005S