
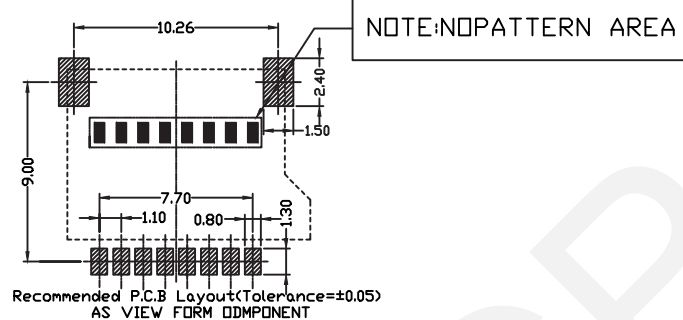
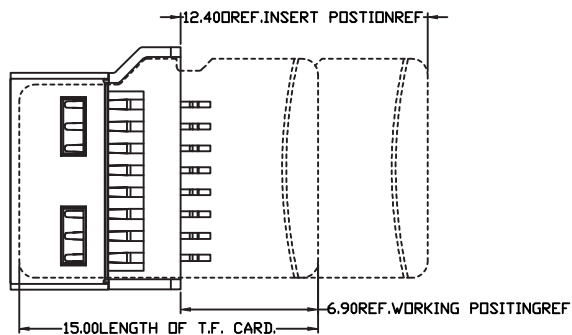


Remark:

1. Material:

1.1 Housing: LCP, black, UL94V-0

1.2 Terminal: Phosphor Bronze, underplating 50U" nickel, selective 1U" Au on Contact area

1.3 Shell: Stainless steel, Underplating 50U" nickel, selective 1U" Au on solder tail;

2. Characteristics:

2.1 Current rating: 0.5A

2.2 Contact resistance: 50mΩ

2.3 Insulation resistance: 1000MΩ

2.4 Voltage: 100VAC

2.5 IR reflow: 235±5℃, 5+1S;

2.6 Pin normal force: 0.35kgf Max;

2.7 Durability: 5000cycles

2.8 High temperature test: 250±5℃, duration 2 minutes,

2.9 Operation environment:

Temperature: -30℃~+80℃

Humidity: 80%RH Max

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:---

0~3 3~18 18~50 50~120

±0.12 ±0.15 ±0.3 ±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

TF Connector Series

THIRD ANGLE PROJECTION



RHTAYF-011-H1.5-R