
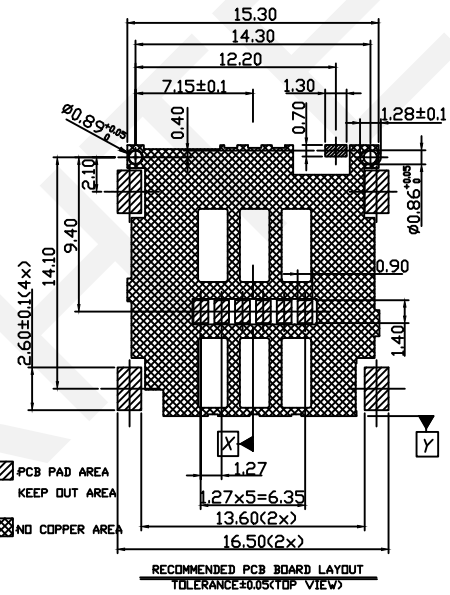
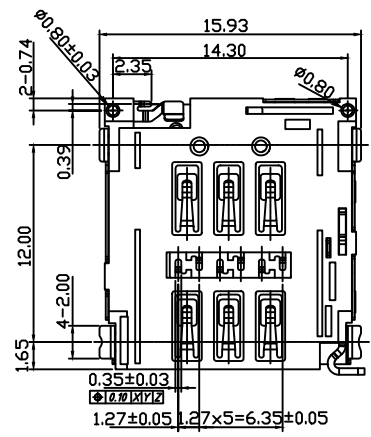
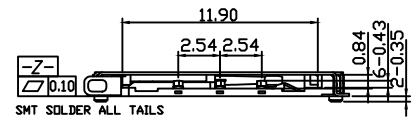
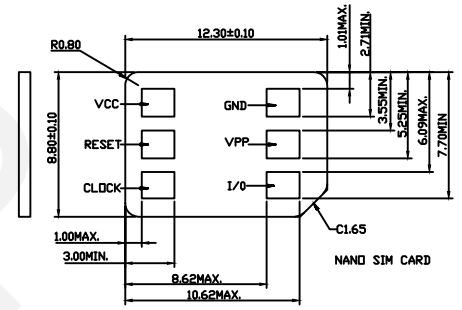
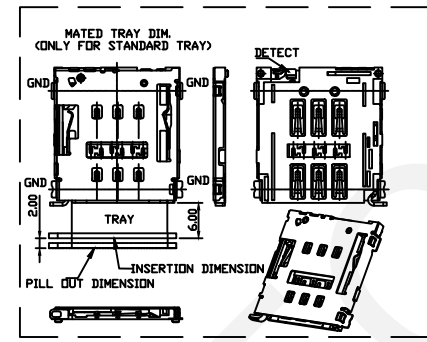



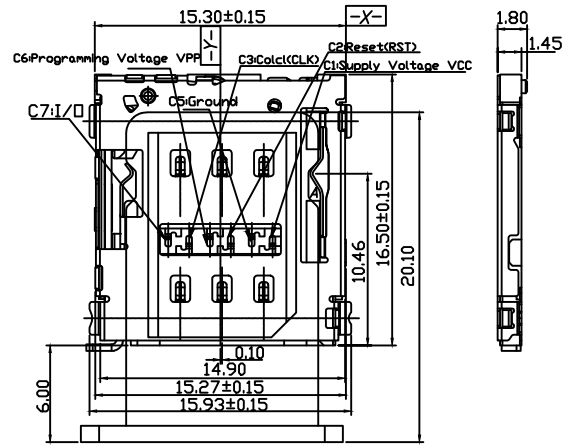

Electrical:

Current Rating:1 Amp/Pin.MAX.

Voltage:30V DC.MAX

Low Level Contact Resistance:30mΩ Max.Initially.

Dielectric Withstanding Voltage:500V AC MIN,For 1 minute.

Insulation Resistance:100MΩ Min.500V DC .For 1 minute

Durability:1000 Cycles

Operating Force (Inserting & Withdrawal): 1N- 10N.

Operating Temp Range:-25℃ TO +85℃(Including Terminal Temp.Rise)

Storage Temp:℃ TO +85℃



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---		DRWN BY PAN		Nano SIM CONN;Tray type,6Pin, H1.5mm,with CD Pin		G			
0~3		3~18		18~50		50~120					CHK'D BY FENG		
±0.12		±0.15		±0.3		±0.5		APPR BY ZHAN			THIRD ANGLE PROJECTION 		RHTAYIM-102-H1.5-R