


Operating Temperature:-40°C TO +85°C

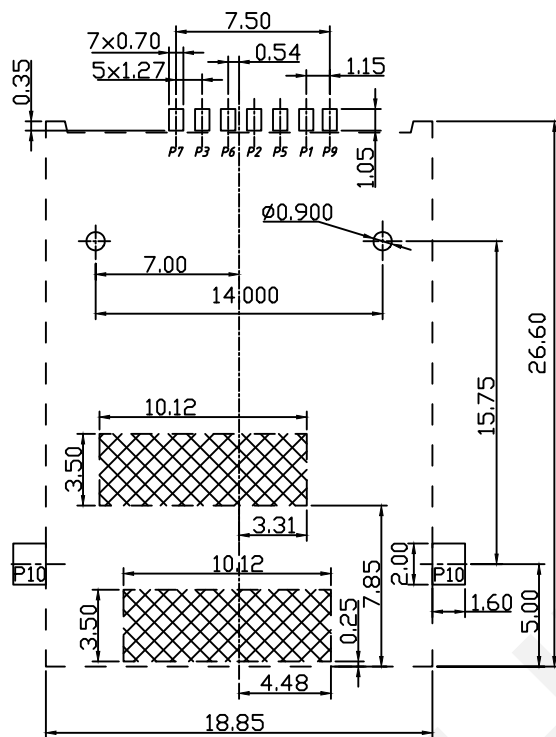

RECOMMENDED PCB LAYOUT
TOLERANCE UNLESS OTHERWISE IS: ± 0.05

 PAD AREA
 KEEP AREA
 KEEP OUT AREA

Connector Termianl No	PIN NO.
PIN 1	VCC:PWR Signal and CND
PIN 2	RES:Reset signal
PIN 3	CLK:Clocking signal
PIN 4	Reserved
PIN 5	GND:pwr Signal and CND
PIN 6	VPP:Porgramming Voltage
PIN 7	I/O:Serial date input/output
PIN 8	Reserved
PIN 9	CD:Card Detect Switch
PIN 10	GND

