

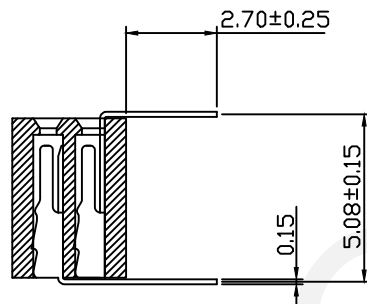
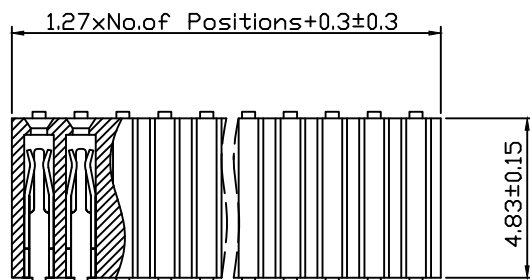


RoHS Compliance

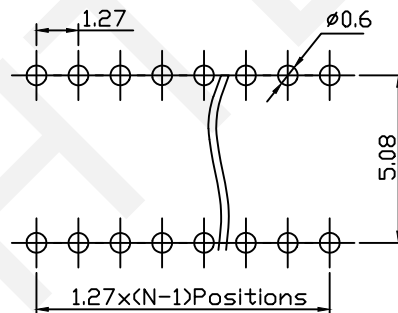

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

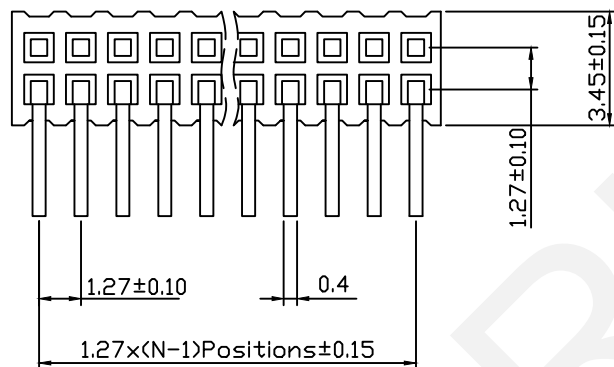

Material:
Standard: PA6T/LCP
Contact: Phosphor Bronze
Plating: Au Or Sn Over Ni
Insulator: Polyester, UL94V-0

Electrical Characteristics:
Rated Current: 1.0AMP
Contact Resistance: $20m\Omega$ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: $1000M\Omega$ Min

Mechanical
Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Max. Processing Temp: 230°C For 30-60
Seconds (260°C For 10 Seconds)

Order Information:
RHTAY08CP-3.4-2-XX-R-B

Female Header
08CP: 1.27mm
Plastics Height: 3.4mm
Per Row: Double Layout
Pin: No. of Pins (02~80)
Type: Right Angle Pin
Material: B=PA6T C=LCP



RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
± 0.12	± 0.15	± 0.3	± 0.5



CHK'D BY FENG
APPR BY ZHAN

1.27x3.4mm Female Header
Double Layer, Right Angle Pin, 2xN Pin
THIRD ANGLE PROJECTION
RHTAY08CP-3.4-2-XX-R-B

RoHS Compliance

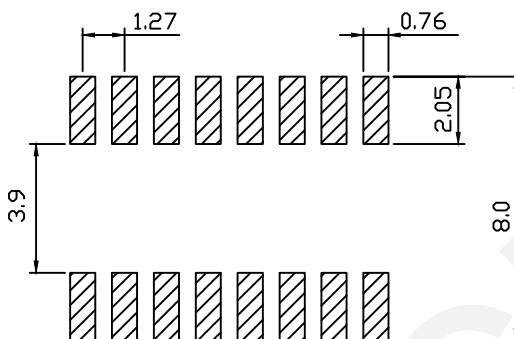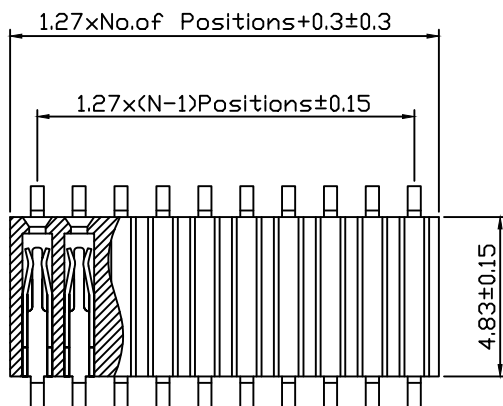

Recommended P.C.B Layout<Top Side>
(PCB BOARD TOLERANCE±0.05)

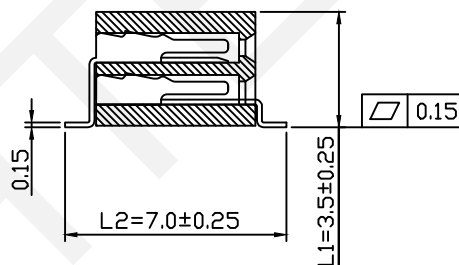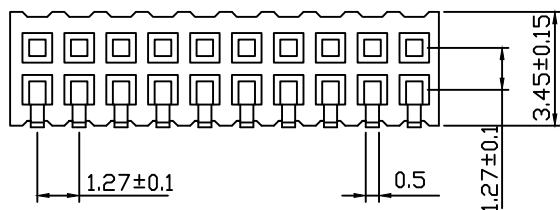

Dimension Antitheses List (mm)			
ITEM	L1	L2	Plastic Height
Standard	3.50	7.00	3.40
Nonstandard	---	---	---

Material:

Standard: PA6T/LCP

Contact:Phosphor Bronze

Contact Plating: Au or Sn Over Ni

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max.Processing Temp: 230°C For 30-60 Seconds
(260°C For 10 Seconds)

Order Information:

RHTAY08CP-3.4-2-XX-T-L1xL2-B-R

Pin Header Series

08CP:1.27mm

Plastics Height:3.4mm

Per Row:Double Layer

Pin: No.of Pins (02~80)

SMT:T=Without Post,

T3=With Post

Size:L1xL2

Material:B=PA6T C=LCP

Packing:

A=Tray

T=Tube

M=Reel+Mylar

P=Tube+Cap

R=Reel+Cap

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

1.27mm Female Header
Double Layer,SMT Pin,2xN Pin

THIRD ANGLE PROJECTION



RHTAY08CP-3.4-2-XX-T-L1xL2-B-R