

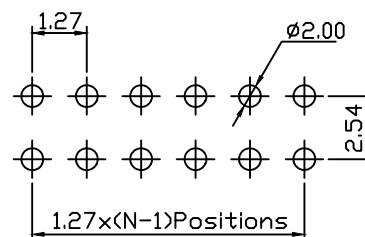
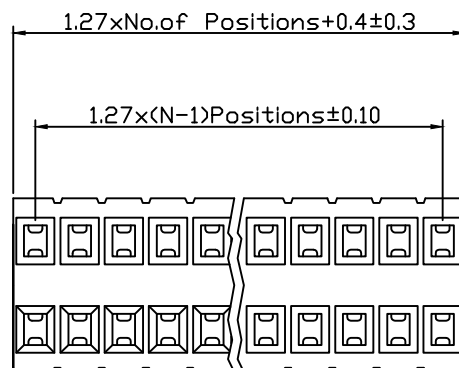


RoHS Compliance

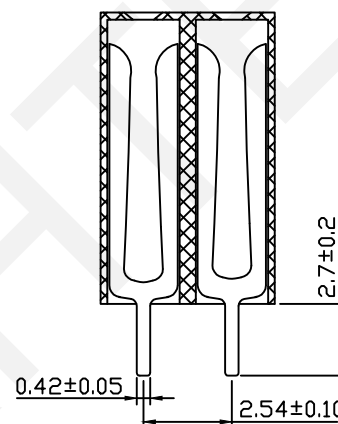

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

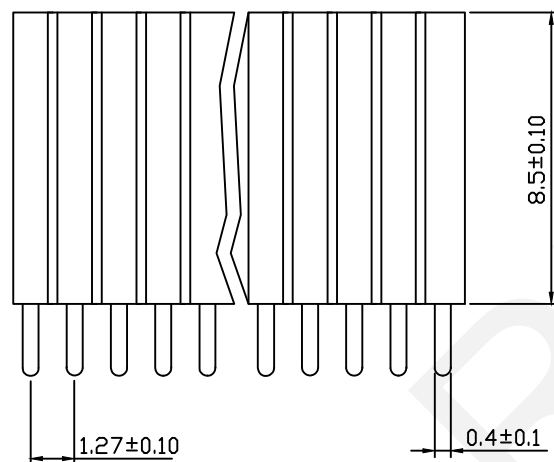

Material:

Standard:PA6T/LCP

Contact: Brass

Plating: Au Or Sn Over 50n" Ni

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40℃~+105℃

Max.Processing Temp: 230℃ For 30-60

Seconds (260℃ For 10 Seconds)

Order Information:

RHTAY08D-8.5-2-XX-S-B

Female Header

08D:1.27mm

Plastics Height:8.5mm

Per Row:Double Layout

Pin: No.of Pins(02~80)

Type: Straight Pin

Material: B=PA6T C=LCP

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

1.27x2.54xx8.5mm Female Header
Double Layer, Straight Pin, 2xN Pin





THIRD ANGLE PROJECTION



RHTAY08D-8.5-2-XX-S-B

RoHS Compliance

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

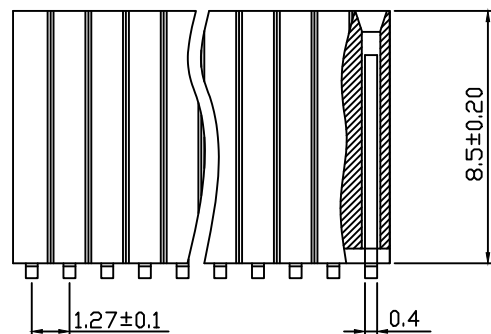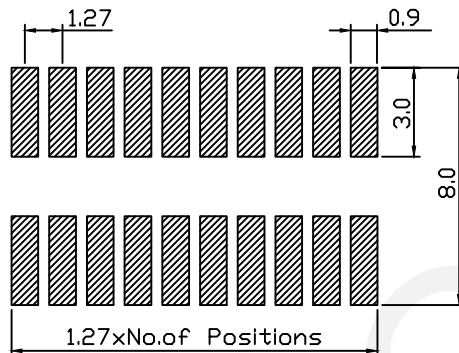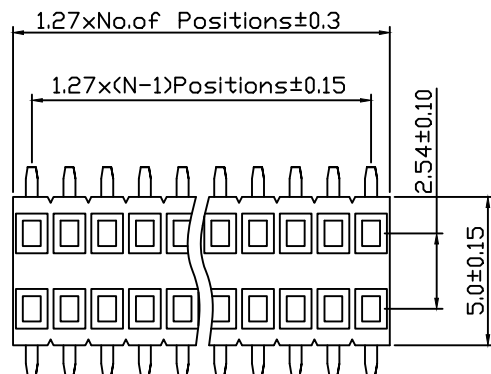

Dimension Antitheses List (mm)

ITEM	L1	L2	Plastic Height
Standard	9.00	7.00	8.50
Nonstandard	---	---	---

Material:

Standard: PA6T/LCP

Contact:Brass

Plating: Au or Sn Over 50u" Ni

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.0AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max.Processing Temp:230°C For 30-60 Seconds
(260°C For 10 Seconds)

Order Information:

RHTAY08D-8.5-2-XX-T-L1xL2-B-R

Pin Header Series

08D:1.27mm

Plastics Height:8.5mm

Per Row:Double Layer

Pin: No.of Pins (02~80)

SMT:T=Without Post,

T3=With Post

Size:L1xL2

Material:B=PA6T C=LCP

Packing:

A=Tray

T=Tube

M=Reel+Mylar

P=Tube+Cap

R=Reel+Cap

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

1.27mm Female Header
Double Layer,SMT Pin,2xN Pin

THIRD ANGLE PROJECTION



RHTAY08D-8.5-2-XX-T-L1xL2-B-R