

Electrical:

Contact Resistance: 30mΩ Max. Insulator
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C ~ +105°C

Material:

Insulator: Glass-filled Thermoplastic PBT UL94V-0
 Contacts: Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY2Y-2244-MR

Din41612 2x22Pin Two Row Short Type




Part Number: 2244/2122/2222/2111

Contact Type: M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

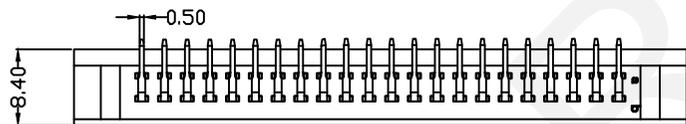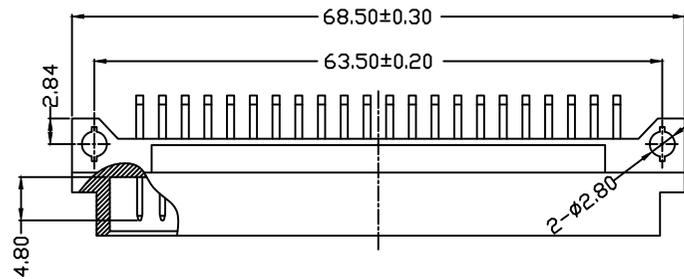

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	44	a b		2244
	22	a -		2122
5.08mm	22	a b		2222
	11	a -		2111

NINGBO RHT ELECTRONIC CO.,LTD





UNITS:mm	SHEET SIZE: A4	SCALE: ---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG			
APPR BY ZHAN			

2x22Pin Two Row Short B Type

THIRD ANGLE PROJECTION



RHTAY2Y-2244-MR

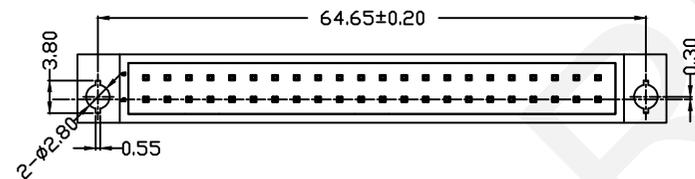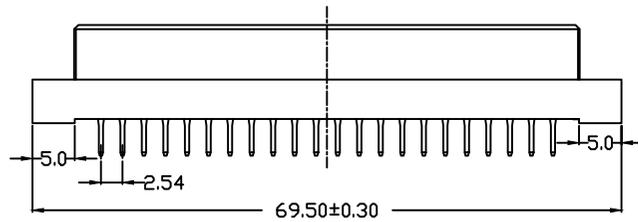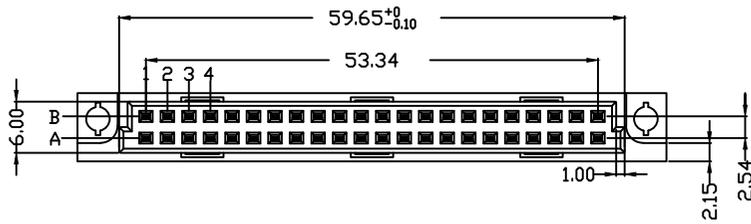

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	44	a b		2244
	22	a -		2122
5.08mm	22	a b		2222
	11	a -		2111

Electrical:

Contact Resistance:30mΩ Max.Insulator
 Insulation Resistance:1000 MΩ Min.at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating:2 AMP
 Voltage Rating:250 VAC
 Operating Temperature:-55°C~+105°C

Material:

Insulator:Glass-filled Thermoplastic PBT UL94V-0
 Contacts:Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.:RHTAY2Y-2244-FS

Din41612 2x22Pin Two Row Short Type

Part Number:2244/2122/2222/2111

Contact Type:M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin





R-Right Pin

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG			APPR BY ZHAN

2x22Pin Two Row Short B Type
 THIRD ANGLE PROJECTION

 RHTAY2Y-2244-FS

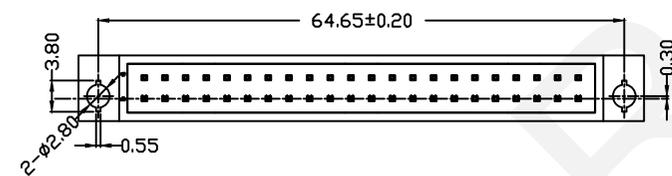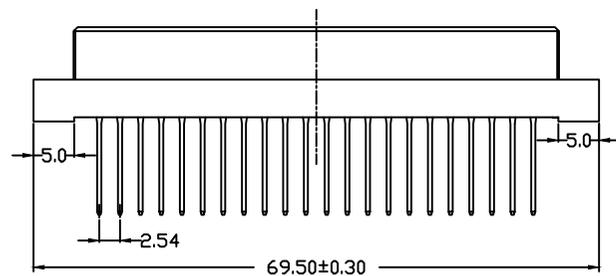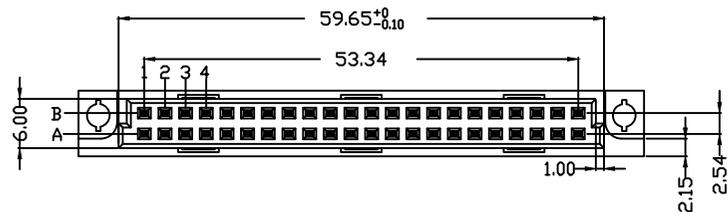

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	44	a b		2244
	22	a -		2122
5.08mm	22	a b		2222
	11	a -		2111

Electrical:

Contact Resistance: 30mΩ Max. Insulator
 Insulation Resistance: 1000 MΩ Min. at 500 VDC
 Withstand Voltage: 1000 VAC For 1 Minute
 Current Rating: 2 AMP
 Voltage Rating: 250 VAC
 Operating Temperature: -55°C ~ +105°C

Material:

Insulator: Glass-filled Thermoplastic PBT UL94V-0
 Contacts: Male-Brass/Female-Phosphor Bronze
 Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY2Y-2244-FW1

Din41612 2x22Pin Two Row Short Type


Part Number: 2244/2122/2222/2111

Contact Type: M=Male F=Female

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

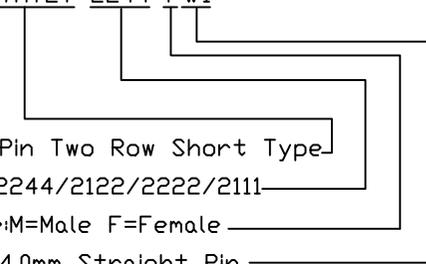

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

2x22Pin Two Row Short B Type
 THIRD ANGLE PROJECTION

 RHTAY2Y-2244-FW1