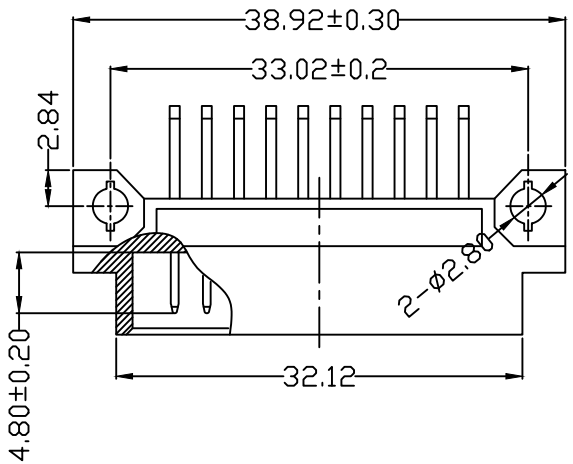

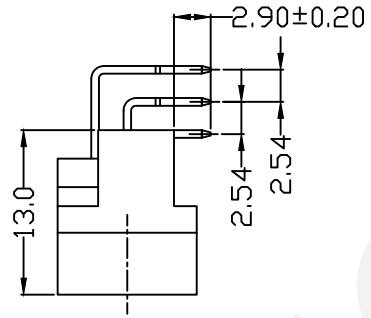

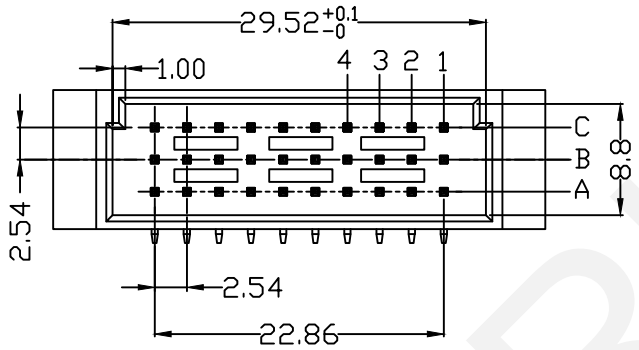

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	30	abc		3330
	20	a-c		3220
	20	ab-		3220A
	10	a--		3110
5.08mm	15	abc		3315
	10	a-c		3210
	10	ab-		3210A
	5	a--		3105

Electrical:
Contact Resistance:30mΩ Max.Insulator
Insulation Resistance:1000 MΩ Min.at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating:2 AMP
Volatge Rating:250 VAC
Operating Temperature:-55°C~+105°C

Material:
Insulator:Glass-filled Thermoplastic PBT UL94V-0
Contacts:Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDERINFORMATION
ProductNo.:RHTAY3Q-3330-M R

3x10Pin 3 row Short Type
Part Number:3330/3315/3220
/3210/3110/3105
Contact Type:M=Male
F=Female Receptacle
Tail Style: S-4.0mm Straight Pin
W1-13mm Straight Pin
R-Right Pin

RHTECP

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	3x10Pin 3 row Short C Type
	0~3	3~18	18~50	50~120	CHK'D BY FENG
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN
					THIRD ANGLE PROJECTION / RHTAY3Q-3330-MR

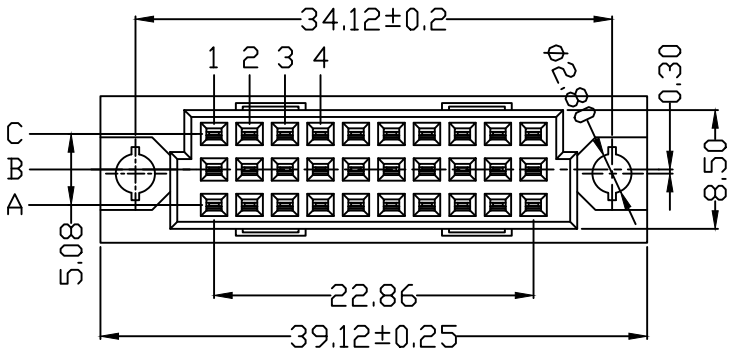



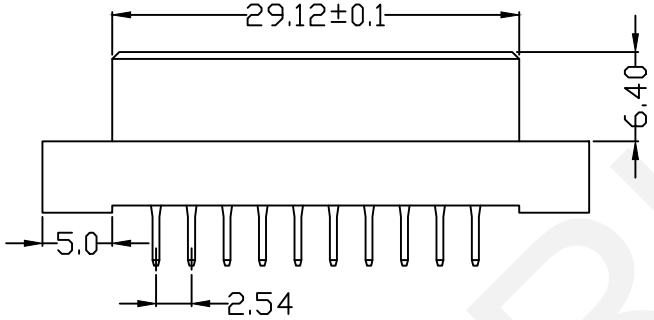

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	30	abc		3330
	20	a-c		3220
	20	ab-		3220
	10	a--		3110
5.08mm	15	abc		3315
	10	a-c		3210
	10	ab-		3210
	5	a--		3105

Electrical:
Contact Resistance:30mΩ Max.Insulator
Insulation Resistance:1000 MΩ Min.at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating:2 AMP
Volatge Rating:250 VAC
Operating Temperature:-55°C~+105°C

Material:
Insulator:Glass-filled Thermoplastic PBT UL94V-0
Contacts:Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDERINFORMATION
ProductNo.:RHTAY3Q-3330 F S

3x10Pin 3 row Short Type
Part Number:3330/3315/3220
/3210/3110/3105
Contact Type:M=Male
F=Female Receptacle
Tail Style: S-4.0mm Straight Pin
W1-13mm Straight Pin
R-Right Pin

RHTECP

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	3x10Pin 3 row Short C Type
	0~3	3~18	18~50	50~120	CHK'D BY FENG
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN
					THIRD ANGLE PROJECTION / RHTAY3Q-3330-FS