
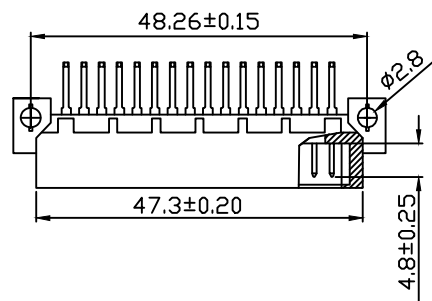


P.C.Bcard Layout

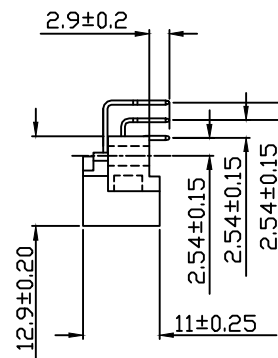

Electrical:

Contact Resistance:30mΩ Max.Insulator
Insulation Resistance:1000 MΩ Min.at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating:2 AMP
Voltage Rating:250 VAC
Operating Temperature:-55°C~+105°C

Material:

Insulator:Glass-filled Thermoplastic PBT UL94V-0
Contacts:Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.:RHTAY3X-3348-M R

3x16Pin 3 row Short Type

Part Number:3348/3232

/3324/3216

Contact Type:M=Male

F=Female Receptacle

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	48	abc		3348
	32	a-c		3232
5.08mm	24	abc		3324
	16	a-c		3216



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5




APPR BY ZHAN

3x16Pin 3 row Short C Type


THIRD ANGLE PROJECTION



RHTAY3X-3348-MR

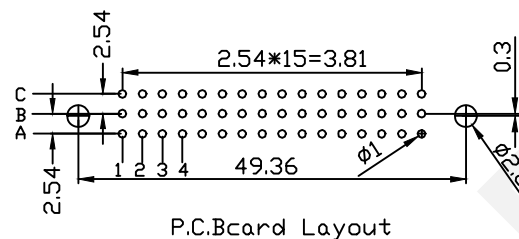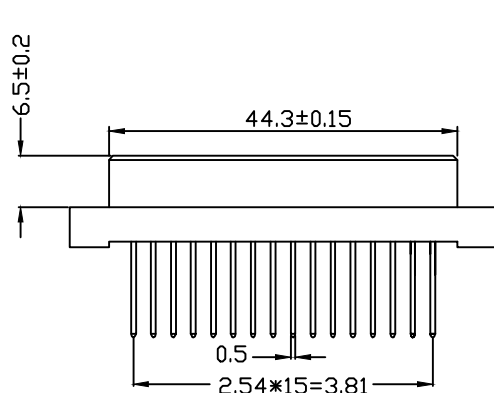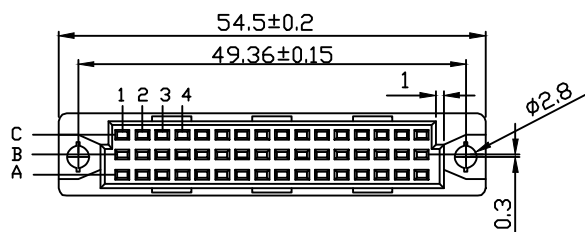

P.C.B card Layout

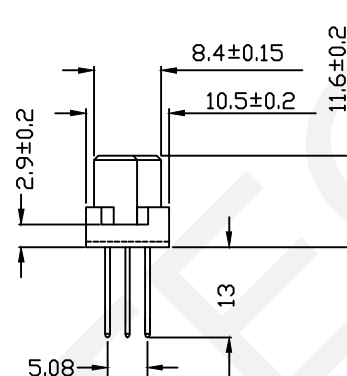

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	48	abc		3348
	32	a-c		3232
5.08mm	24	abc		3324
	16	a-c		3216

Electrical:

Contact Resistance: 30mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55°C ~ +105°C

Material:

Insulator: Glass-filled Thermoplastic PBT UL94V-0
Contacts: Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY3X-3348-F W1

3x16Pin 3 row Short Type

Part Number: 3348/3232

/3324/3216

Contact Type: M=Male

F=Female Receptacle

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5



APPR BY ZHAN

3x16Pin 3 Row Short C Type

THIRD ANGLE PROJECTION



RHTAY3X-3348-FW1

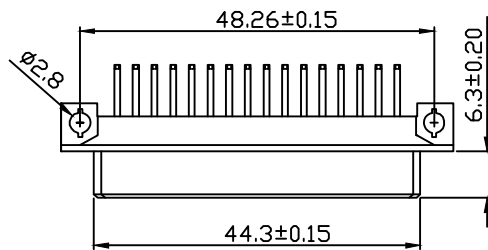

Electrical:

Contact Resistance:30mΩ Max.Insulator

Insulation Resistance:1000 MΩ Min.at 500 VDC

Withstand Voltage: 1000 VAC For 1 Minute

Current Rating:2 AMP

Volatge Rating:250 VAC



Operating Temperature:-55°C~+105°C

Material:

Insulator:Glass-filled Thermoplastic PBT UL94V-0

Contacts:Male-Brass/Female-Phosphor Bronze

Plating: Full Gold Or Selected Gold In Mating Area.

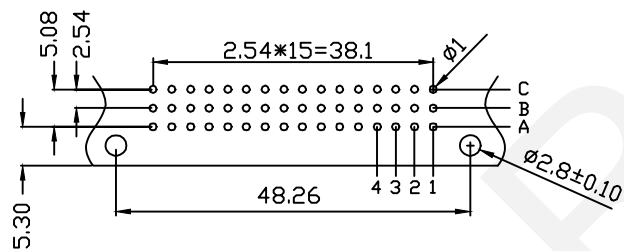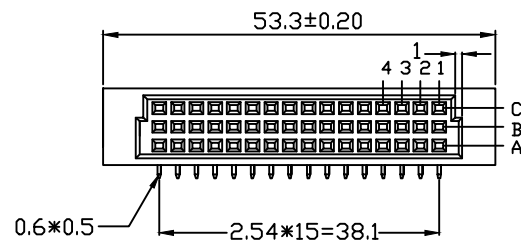

P.C.B card Layout

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	48	abc		3348
	32	a-c		3232
5.08mm	24	abc		3324
	16	a-c		3216

ORDER INFORMATION

Product No.: RHTAY3X-3348-F R

3x16Pin 3 row Short Type

Part Number:3348/3232

/3324/3216

Contact Type:M=Male

F=Female Receptacle

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5




APPR BY ZHAN

3x16Pin 3 Row Short R Type


THIRD ANGLE PROJECTION



RHTAY3X-3348-FR

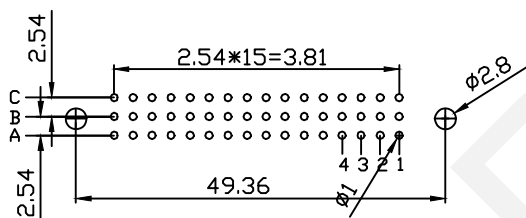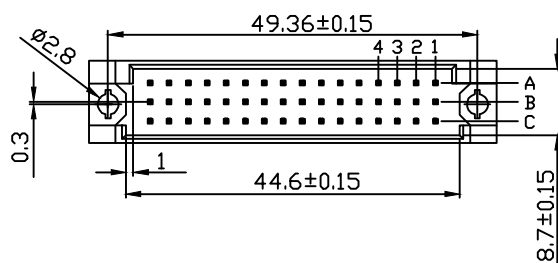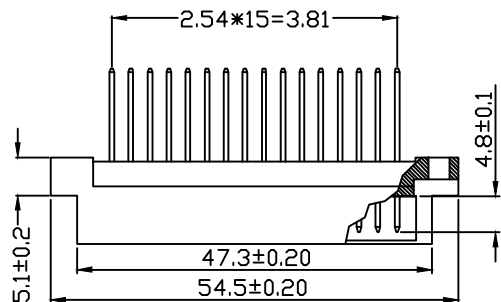

P.C.B card Layout



Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	48	abc		3348
	32	a-c		3232
5.08mm	24	abc		3324
	16	a-c		3216

Electrical:

Contact Resistance: 30mΩ Max. Insulator
Insulation Resistance: 1000 MΩ Min. at 500 VDC
Withstand Voltage: 1000 VAC For 1 Minute
Current Rating: 2 AMP
Voltage Rating: 250 VAC
Operating Temperature: -55°C ~ +105°C

Material:

Insulator: Glass-filled Thermoplastic PBT UL94V-0
Contacts: Male-Brass/Female-Phosphor Bronze
Plating: Full Gold Or Selected Gold In Mating Area.

ORDER INFORMATION

Product No.: RHTAY3X-3348-M W1

3x16Pin 3 row Short Type

Part Number: 3348/3232

/3324/3216

Contact Type: M=Male

F=Female Receptacle

Tail Style: S-4.0mm Straight Pin

W1-13mm Straight Pin

R-Right Pin



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3

±0.5

CHK'D BY FENG

APPR BY ZHAN

3x16Pin 3 Row Short R Type

THIRD ANGLE PROJECTION



RHTAY3X-3348-MW1