
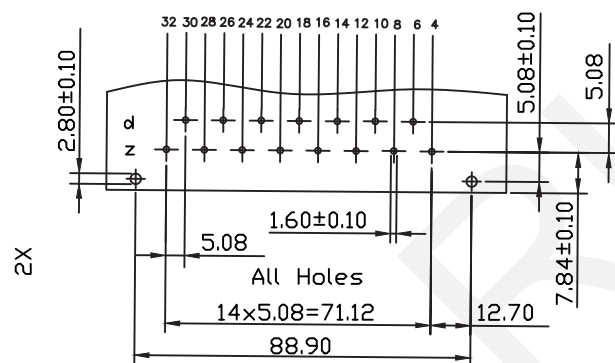



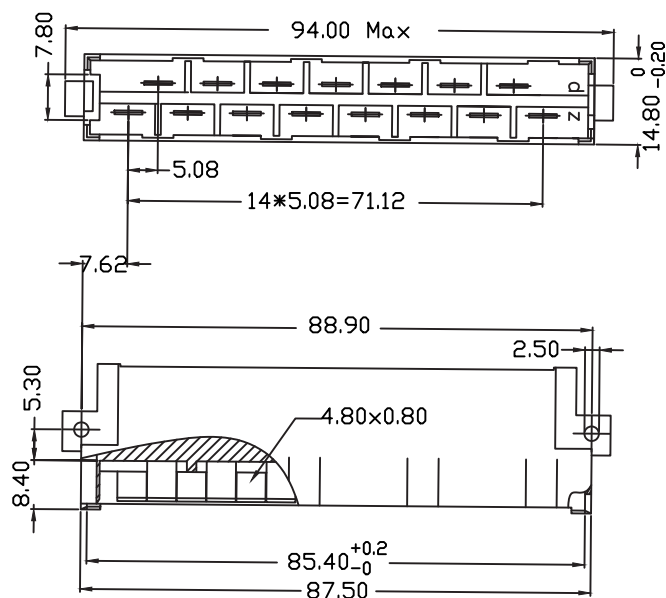

Recommended P.C.B. Layout

Parameter:

Technical Data: EURO DIN 41612: Signal

Housing: PBT & 30% Class Fiber (UL94V-0)

Contact: Male: Brass

Female: Phosphor Bronze

Operating Temperature: -55°C ~ +105°C

Contact Resistance: 8m(ohm) Max.

Insulator resistance: 1000M(ohm) Min.

Current rating: 15AMP

Withstanding voltage: AC 3100V for 1 Minute

Insertion Force: 90N Max.

Withdrawal Force: 0.2N/Pin Min

Contact Rating: Ag/Ni, Plating

Contact Arrangement

View From Termination Side

