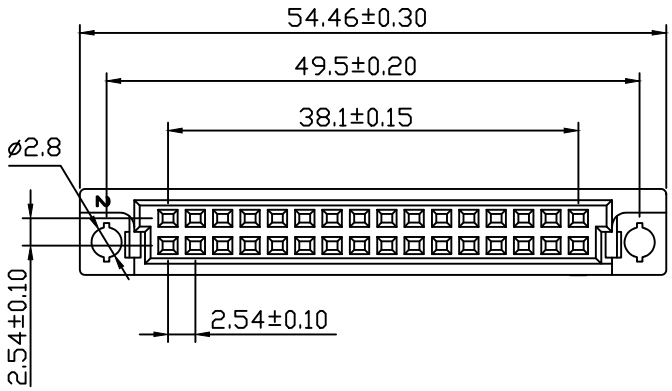



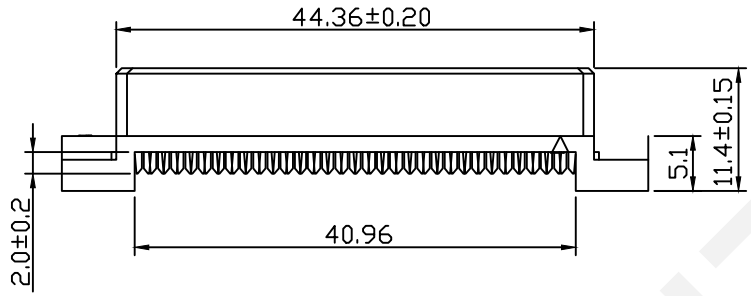



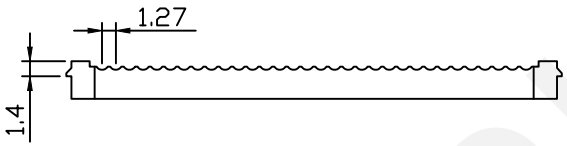



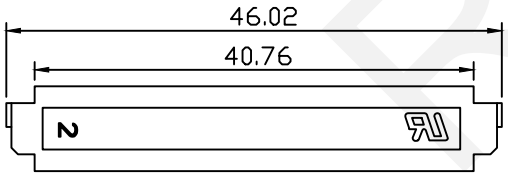

Material:

Standard:PA6T

Contact:Phosphor Bronze,Au Or Sn Over Ni

Insulator:Polyester,UL94V-0

Electrical Characteristics:

Rated Current:	3.0AMP
Contact Resistance:	30mΩ Max
Withstand Voltage:	1000V AC/DC
Insulator Resistance:	1000MΩ Min

Mechanical

Operating Temperature:-40℃~+105℃

Max.Processing Temp:180℃ For 30-60 Seconds (200℃ For 10 Seconds)

Order Information:

RHTAY2A-2232-F

Series No.

Part No.

Female type

RHTECP NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Din41612 2232 Female iDC-Type
	0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	RHTAY2A-2232-F