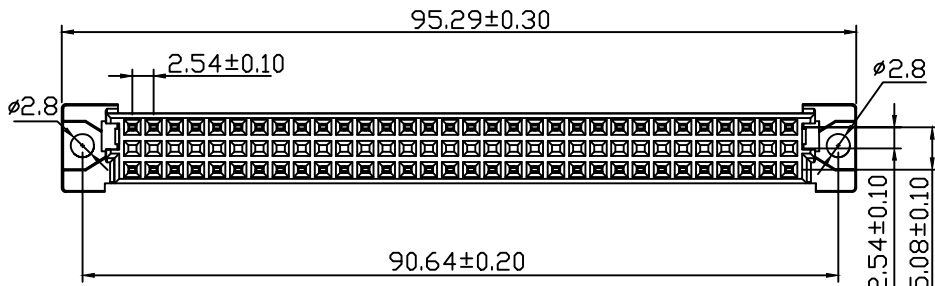

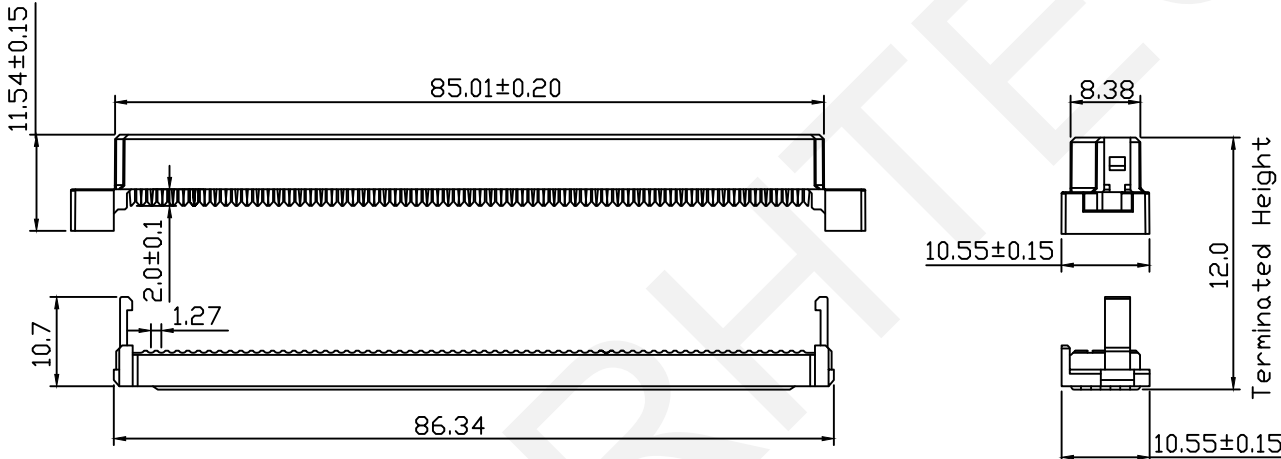


	1	2	3	4	5	6	7	8	9		
A										A	
B							Material: Standard:PBT Contact:Phosphor Bronze,Au Or Sn Over Ni Insulator:Polyester,UL94V-0			B	
C						Electrical Characteristics: Rated Current: 3.0AMP Contact Resistance: 30mΩ Max Withstand Voltage: 1000V AC/DC Insulator Resistance: 1000MΩ Min				C	
D						Mechanical Operating Temperature:-40℃~+105℃ Max.Processing Temp:180℃ For 30-60 Seconds (200℃ For 10 Seconds)				D	
E						Order Information: RHTAY3C-3264-F Series No. _____ Part No. _____ Female Type _____				E	
F										F	
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Din41612 3264 Female IDC-Type			G
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION 		
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN			
	1	2	3	4	5	6	7	8	9		