

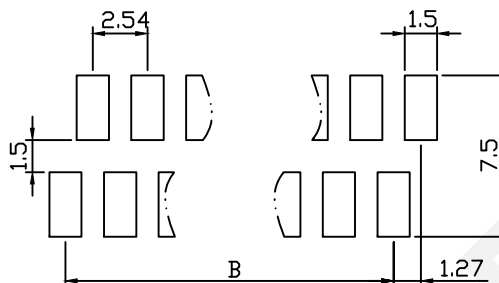
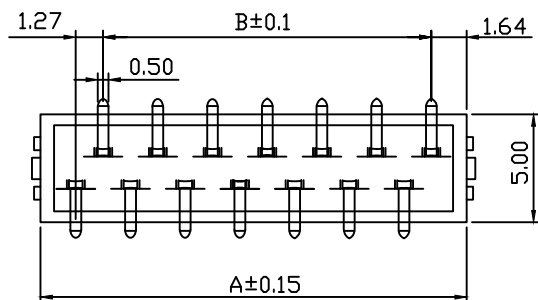


RoHS Compliance

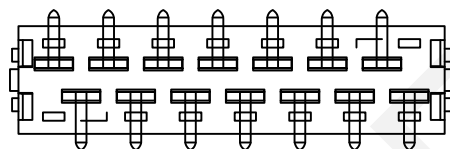

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

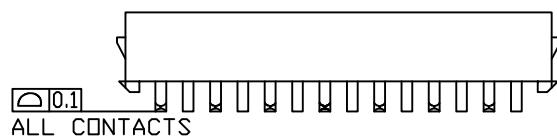

Poles	DIM.A	DIM.B	Qty/Tube
04	7.20	2.54	68
06	9.74	5.08	52
08	12.28	7.62	42
10	14.82	10.16	36
12	17.36	12.70	31
14	19.90	15.24	27
16	22.44	17.78	24
18	24.98	20.32	22
20	27.52	22.86	20
22	30.06	25.40	18
24	32.60	27.94	17
26	35.14	30.48	16

Material:
Housing :PA46/PA9T UL94V-0
Contacts: Brass
Plating:Sn Over 50u" Nickel

Electrical Characteristics:
Current Rating : 1.0AMP
Contact Resistance: 20MΩ ohm Max
Insulator Resistance: 1000MΩ ohm Min
Withstand Voltage: 500V AC
Operating Temperature:-40°C~+105°C

Order Information:

RHTAY04H-XX-R-□-□
Pitch:2.54mm
XX-No.of 04~26pin
Color:R-Red B-Black
Material: _____
D=PA9T E=PA46
Packing: _____
NONE=Tube R=Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Micro Match Connector Male SMD Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY04H-XX-R-□-□

1

2

3

4

5

6

7

8

9