

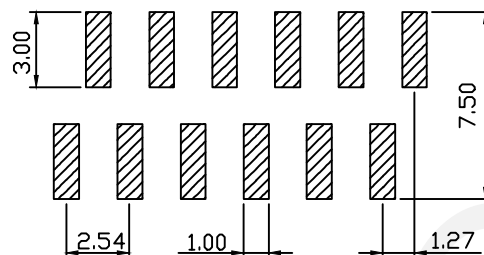
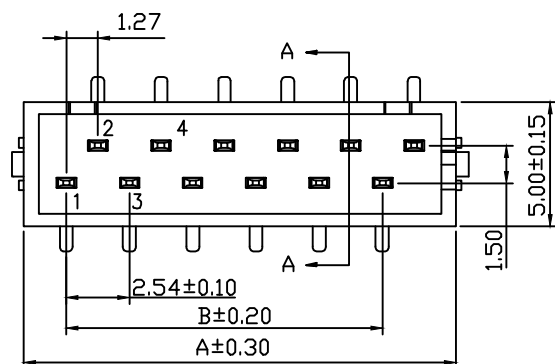



RoHS Compliance



Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

Poles	DIM.A	DIM.B	Qty/Tube
04	7.20	2.54	68
06	9.74	5.08	52
08	12.28	7.62	42
10	14.82	10.16	36
12	17.36	12.70	31
14	19.90	15.24	27
16	22.44	17.78	24
18	24.98	20.32	22
20	27.52	22.86	20
22	30.06	25.40	18
24	32.60	27.94	17
26	35.14	30.48	16

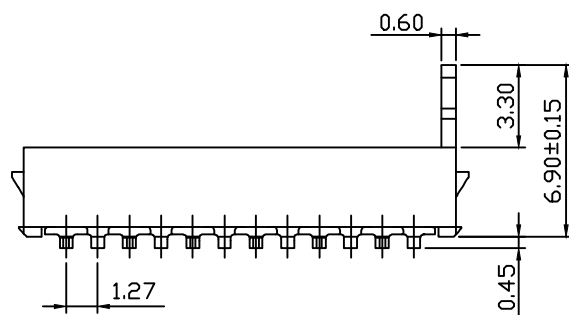

SECTION A-A

Material:

Housing: PA46/PA9T UL94V-0

Contacts: Brass

Plating: Sn Over 50u" Nickel

Electrical Characteristics:

Current Rating: 1.0AMP

Contact Resistance: 20MΩ ohm Max

Insulator Resistance: 1000MΩ ohm Min

Withstand Voltage: 500V AC

Operating Temperature: -40°C ~ +105°C

Max Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

Order Information:

RHTAY04MD-XX-R-□-□

Pitch: 2.54mm

XX-No. of 04~26pin

Color: R-Red B-Black

Material:

D=PA9T E=PA46

Packing:

NONE=Tube R=Reel



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Micro Match Connector Male SMD Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY04MD-XX-R-□-□

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN