
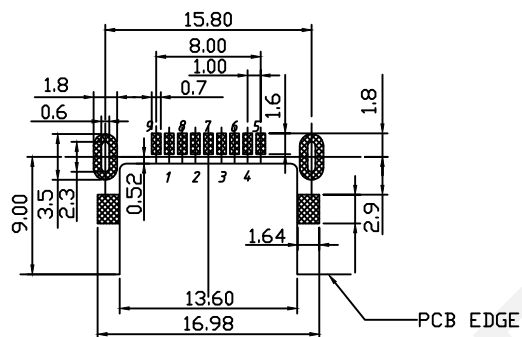
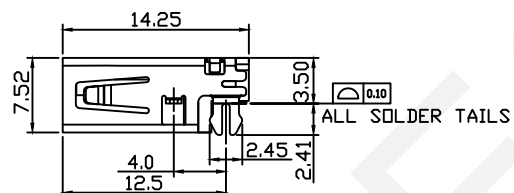






RECOMMENDED PCB LAYOUT

TOLERANCE: ± 0.05 ,
(TOP VIEW)

Material

Housing: Thermoplastic, Glass Fiber Filled, UL94-HB

Cover: Thermoplastic, Glass Fiber Filled, UL94V-0

Contact: Copper Alloy, Gold.

Shell: Brass/Spcc, Nickel (Ni) T=0.30MM

Electrical

Contact Current Rating: 1.5 A For Pin1 & Pin4

0.25 A Other Contacts

Withstanding Voltage: 100vac (Rms)

Contact Resistance: 30m Ω Max (Initial) For Pin1 & Pin4

50m Ω Max (Initial) For Other Contacts

Insulation Resistance: 1000M Ω Min

Mechanical

Operating Temperature: -30°C TO +80°C

Mating Force: 35N MAX

Unmating Force: 10N MIN,

Order Information

RHTAY007-L

USB 3.0 AF SMD

Color: L: Blue



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

USB 3.0 Type A Female CONN,
MID MOUNT. SMD, H3.5mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAY007