


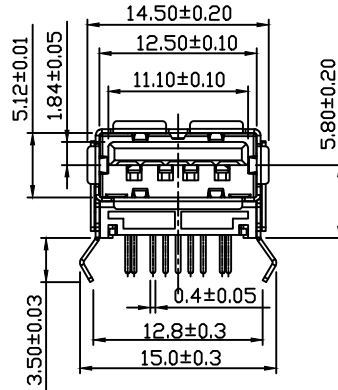
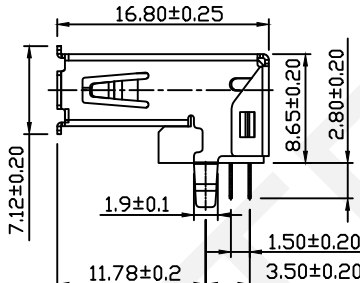
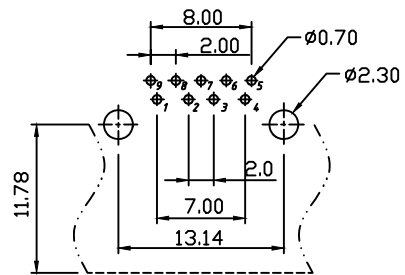








	1	2	3	4	5	6	7	8	9	
A							Material Housing:Thermoplastic,Glass Fiber Filled,UL94-HB Cover:Thermoplastic,Glass Fiber Filled,UL94V-0 Contact: Copper Alloy,Gold. Shell:Brass/Spcc,Nickel(Ni)T=0.30MM			A
B							Electrical Contact Current Rating:1.5A For Pin1&Pin4 0.25 A Other Contacts Withstanding Voltage:100vac(Rms) Contact Resistance:30mΩ Max(Initial) For Pin1&Pin4 50mΩ Max(Initial)For Other Contacts Insulation Resistance:1000mΩ Min			B
C							Mechanical Operating Temperature:-30°C To+80°C Mating Force: 35N MAX Unmating Force: 10N MIN			C
D										D
E							Order Information RHTAY008-L USB 3.0 Type A Female Color: L:Blue			E
F	RECOMMENDED PCB LAYOUT TOLERANCE:±0.05mm									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Type A Female CONN. R/A H8.65mm		G
				0~3	3~18	18~50	50~120	CHK'D BY FENG	 RHTAY008	
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		
	1	2	3	4	5	6	7	8	9	




Material
Housing:Thermoplastic,Glass Fiber Filled,UL94-HB
Cover:Thermoplastic,Glass Fiber Filled,UL94V-0
Contact: Copper Alloy,Gold.
Shell:Brass/Spcc,Nickel(Ni)T=0.30MM

Electrical
Contact Current Rating:1.5A For Pin1&Pin4
0.25 A Other Contacts
Withstanding Voltage:100vac(Rms)
Contact Resistance:30mΩ Max(Initial) For Pin1&Pin4
50mΩ Max(Initial)For Other Contacts
Insulation Resistance:1000mΩ Min

Mechanical
Operating Temperature:-30°C To+80°C
Mating Force: 35N MAX
Unmating Force: 10N MIN

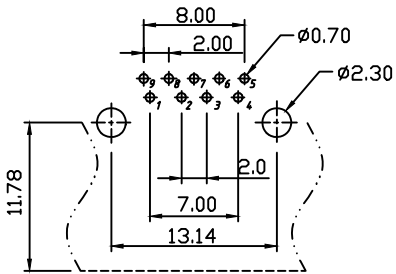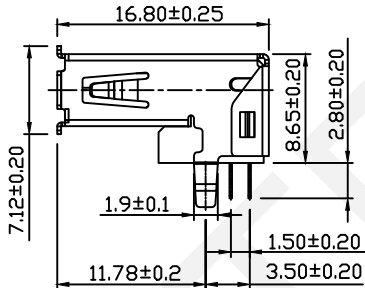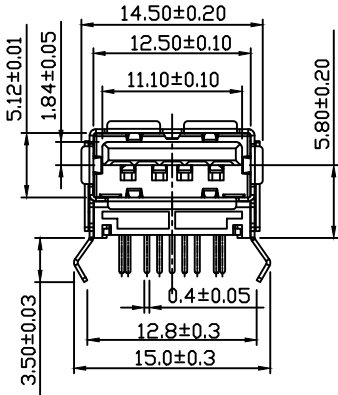

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm



Order Information
RHTAY008-L
USB 3.0 Type A Female
Color: L:Blue