

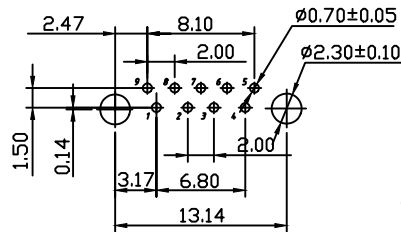


	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	USB 3.0 TYPE A Female,Straight THIRD ANGLE PROJECTION 		
	1	2	3	4	5	6	7	8	9



Recommended PCB Layout

Material
Housing:PBT+30%GF,UL94V-0
Shell :Brass C2680 T=0.30mm ,Plated Nickel
Terminal :Phosphor Bronze C5191 T=0.25mm,
Plated Gold/Tin

Electrical
Voltage Current Rating:2AMP, 30V AC
Insulator Resistance: 100MΩ Min
Contact Resistance: 50mΩ Max
Withstanding Voltage: 300V AC

Mechanical
Operating Temperature:-55°C TO +85°C
Mating Force: 35N MAX
Unmating Force: 10N MIN.

Order Information

RHTAY018-L

USB AF 3.0 180 DIP Type

Color: L:Blue

