
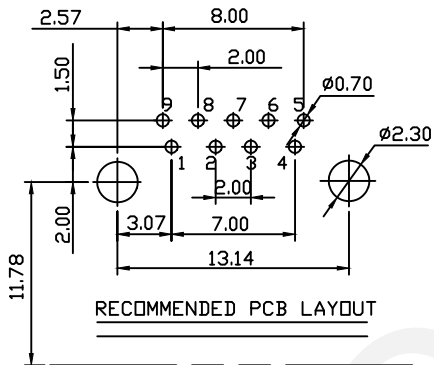




Material

Housing: PBT+30%GF, UL94V-0

Shell :Brass C2680 T=0.30mm ,Plated Nickel

Terminal :Phosphor Bronze C5191 T=0.25mm,
Plated Gold/Tin

Electrical

Voltage Current Rating:2AMP,30V AC

Insulator Resistance: 100MΩ Min

Contact Resistance:50mΩ Max

Withstanding Voltage:300V AC

Mechanical

Operating Temperature:-55°C TO +85°C

Mating Force: 35N MAX






Unmating Force: 10N MIN.

Order Information

RHTAY019-L

USB AF 3.0 DIP Type

Color: L:Blue

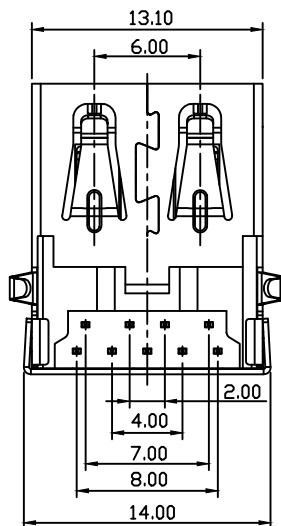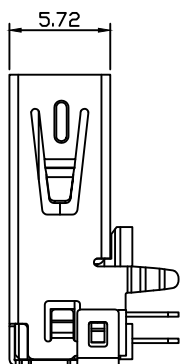

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

USB 3.0 Type A Female CONN. R/A

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY019