

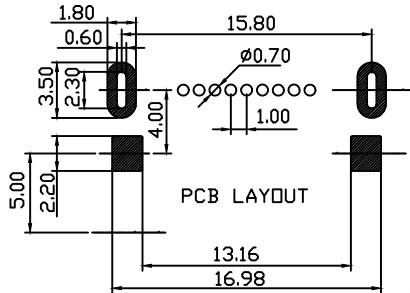


	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3 3~18 18~50 50~120 ±0.12 ±0.15 ±0.3 ±0.5	SHEET SIZE: A4 SCALE:---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	USB 3.0 Type A Female CONN. R/A THIRD ANGLE PROJECTION  RHTAY025		
	1	2	3	4	5	6	7	8	9



Material

Housing: PBT+30%GF, UL94V-0

Shell :Brass C2680 T=0.30mm ,Plated Nickel

Terminal :Phosphor Bronze C5191 T=0.25mm,
Plated Gold/Tin

Electrical

Voltage Current Rating:2AMP,30V AC

Insulator Resistance: 100MΩ Min

Contact Resistance:50mΩ Max

Withstanding Voltage:300V AC

Mechanical

Operating Temperature:-55°C TO +85°C

Mating Force: 35N MAX

Unmating Force: 10N MIN.

Order Information

RHTAY025-L

USB AF 3.0 90°

Color: L:Blue

