
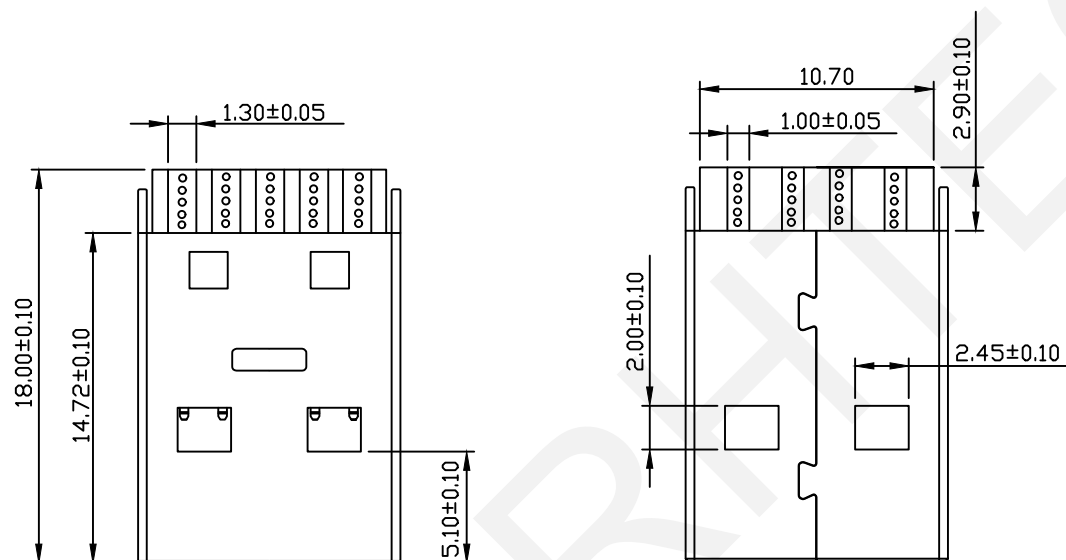


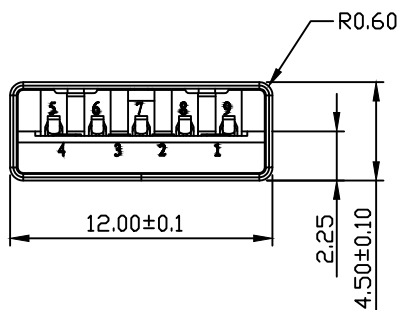

Material

Insulator: PBT,UL94V-0

Contact: Copper Alloy T=0.2mm,Gold plated

Shell:Spcc,T=0.30MM, Nickel(Ni) Plated

Electrical

Contact Current Rating:1.5 A For Pin1&Pin4

0.25 A Other Contacts

Withstanding Voltage:500VAC(R.M.S.)

Contact Resistance: 30mΩ Max

Insulation Resistance:1000MΩ Min

Mechanical

Operating Temperature:-40°C TO +85°C

Mating Force: 35N MAX

Unmating Force: 10N MIN.

Order Information

RHTAY12-L

USB 3.0 Type A Male Solder

Color: L:Blue

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

USB 3.0 Type A Male CONN, Solder

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY12