


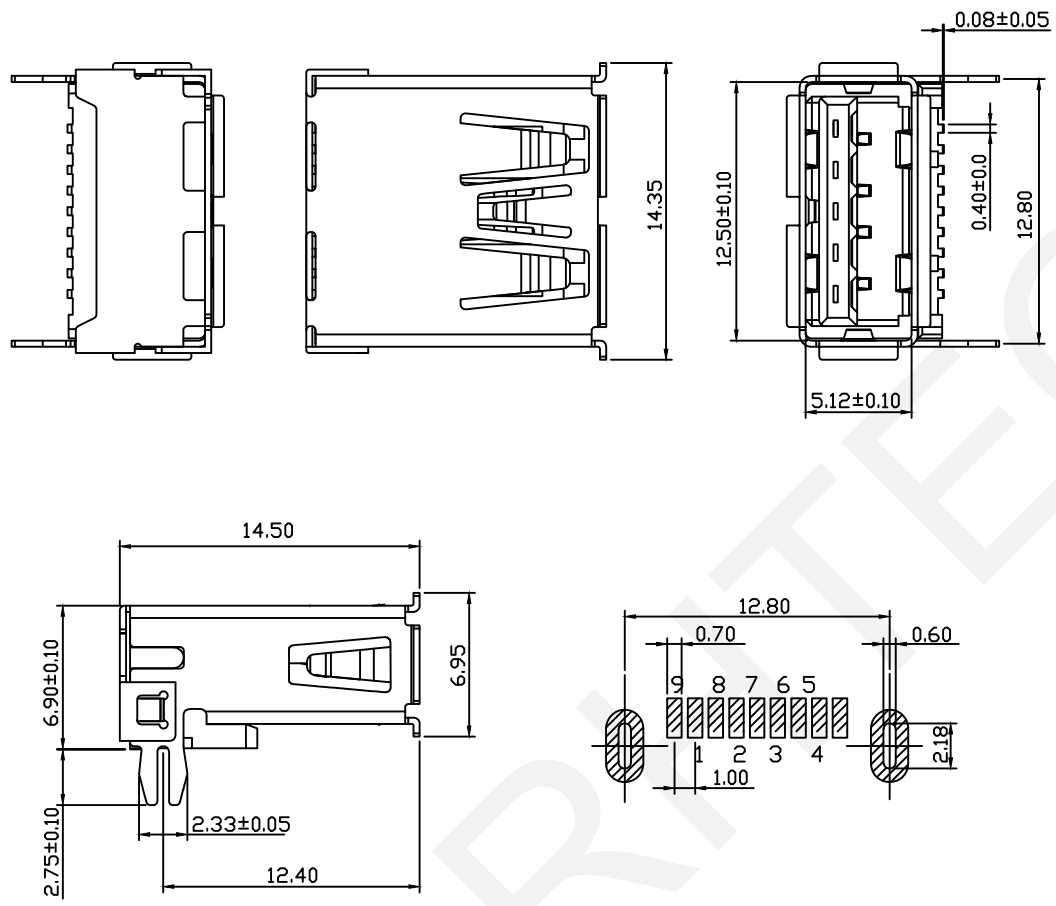

Material

Housing: Thermoplastic, Glass Fiber Filled, UL94-HB

Cover: Thermoplastic, Glass Fiber Filled, UL94V-0

USB2.0 Contact: Copper Alloy, Gold.

USB3.0 Contact: Copper Alloy, Gold.

Shell: Brass/Spcc, Nickel(Ni)T=0.30MM

Electrical

Contact Current Rating: 1.5A For Pin1&Pin4

0.25 A Other Contacts

Withstanding Voltage: 100vac(Rms)

Contact Resistance: 30mΩ Max(Initial) For Pin1&Pin4

50mΩ Max(Initial) For Other Contacts

10mΩ Max Change For Post Test Lcr

Insulation Resistance: 1000mΩ Min

Mechanical

Operating Temperature: -40°C To +85°C

Mating Force: 35N MAX

Unmating Force: 10N MIN

Order Information

RHTAY301-L

USB 3.0 AF SMT

Color: L: Blue



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

USB 3.0 Type A Female CONN. SMD	
THIRD ANGLE PROJECTION	RHTAY301