

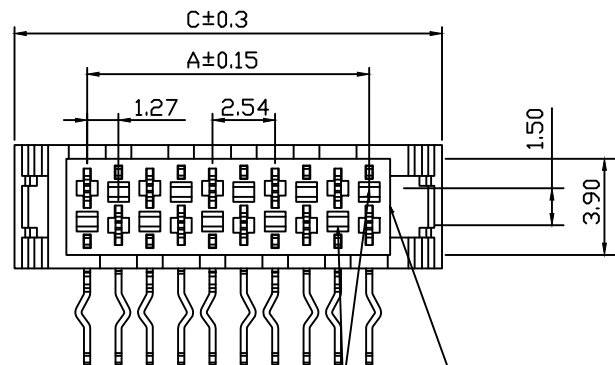
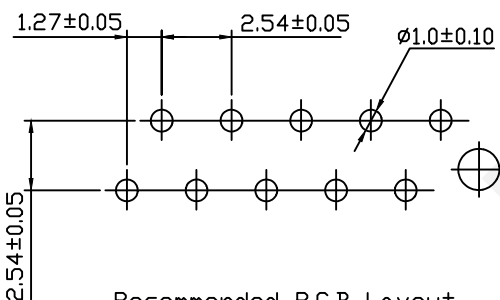



RoHS Compliance

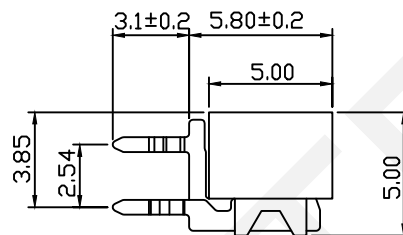

REFERENCE MATING INTERFACE PATTERN:
1.27 STAGGERED PITCHx1.5 ROW-DISTANCE

POLARISATION SLOT

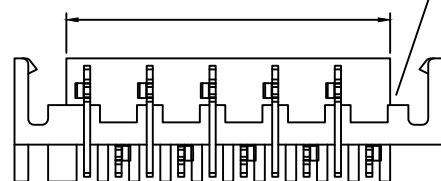

Recommended P.C.B Layout

Poles	DIM.A	DIM.B	DIM.C	Qty/Tube
04	3.81	5.50	9.71	59
06	6.35	8.04	12.25	47
08	8.89	10.58	14.79	39
10	11.43	13.12	17.33	33
12	13.97	15.66	19.87	29
14	16.51	18.20	22.41	25
16	19.05	20.74	24.95	23
18	21.59	23.28	27.49	21
20	24.13	25.82	30.03	19
22	26.67	28.36	32.57	17
24	29.21	30.90	35.11	16
26	31.75	33.44	37.65	15

Material:

Housing: PA46/PA9T UL94V-0

Contacts: Phosphor Bronze

Plating: Sn Over 50u" Nickel

Electrical Characteristics:

Current Rating: 1.0AMP

Voltage Rating: 230V AC/DC

Withstand Voltage: 500V AC/Minute

Contact Resistance: 20m Ohm Max.

Insulator Resistance: 1000M Ohm Min

Operating Temperature: -40°C~+105°C

Order Information:

RHTAY04AR-XX-R-□-□

Pitch: 2.54mm

XX-No. of 04~26pin

Color: R-Red B-Black

Material:

A=PBT D=PA9T E=PA46

Packing:

T=Tube C-R=Cap+Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

Micro Match Connector
Female DIP 90 With Ear

THIRD ANGLE PROJECTION



RHTAY04AS-XX-R-□-□