


RoHS Compliance

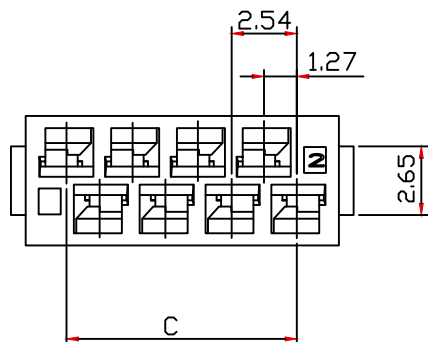

Poles	DIM.A	DIM.B	DIM.C	Qty/Tube
04	7.2	8.4	3.81	900
06	9.8	10.9	6.85	700
08	12.3	13.5	8.89	500
10	14.9	16.0	11.43	450
12	17.4	18.5	13.97	400
14	19.9	21.1	16.51	350
16	22.5	23.6	19.05	300
18	25.0	26.2	21.59	250
20	27.6	28.7	24.13	200

Material:

Housing: PBT/PA46 UL94V-0

Contacts: Phosphor Bronze

Electrical Characteristics:

Current Rating : 1.0AMP

Contact Resistance: 20m Ohm Max.

Insulator Resistance: 1000M Ohm Min

Operating Temperature: -40°C~+105°C

Order Information:

RHTAY04FL-XX-H-R-□



Pitch: 2.54mm

XX-No. of 04~20pin

Type: H=Housing

Color: R=Red B=Black

Material: NONE=PBT E=PA46

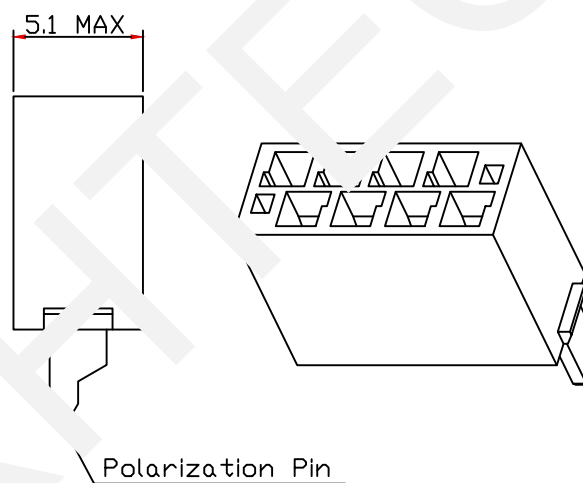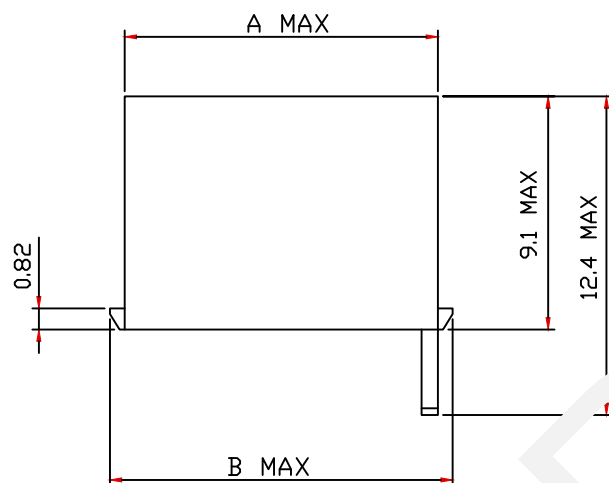

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Micro Match Connector Housing

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY04FL-XX-H-R-□


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5




6

7

8

9

RoHS Compliance

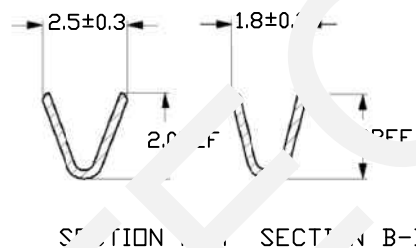
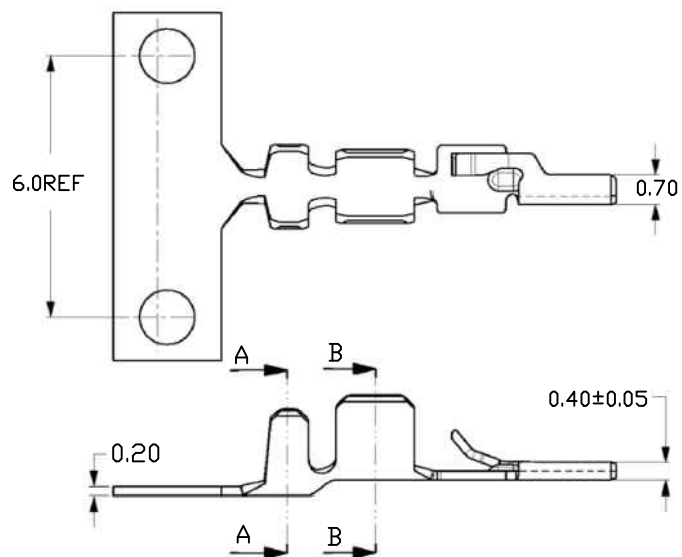


DETAIL C
SCALE 2:1

SEE DETAIL
SEE DETAIL

Reel Packaging
15000 Pcs/reel

Reel Packaging
750 Pcs/reel

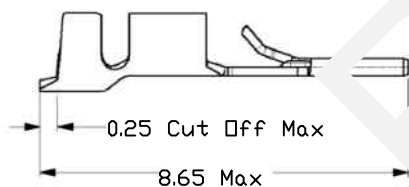

NOTES:

- 1.WIRE RANGE 24-20 AWG
- 2.INSULATION RANGE.Ø50-.060(1.27-1.52 mm)
- 3.FOR APPLICATOR USE ONLY
- 4.FOR HANDTOOL USE ONLY
- 5.FOR APPLICABLE CONNECTOR HOUSINGS SEE C-338095

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm		SHEET SIZE: A4		SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	


DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Micro Match Connector Housing

THIRD ANGLE PROJECTION



RHTAY04FL-XX-H-R-□