


RoHS Compliance

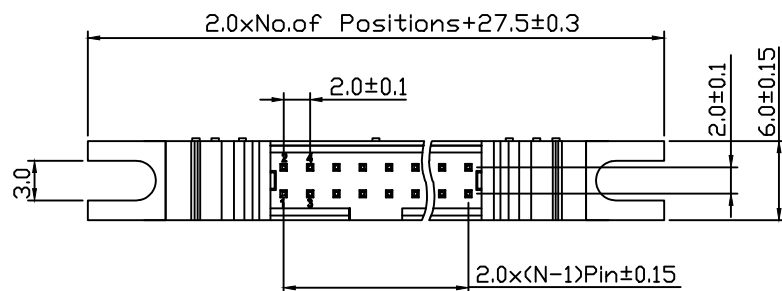

NAME	DIM L	DIM L1
Long Latch	24.00	11.50
Short Latch	21.20	8.70

Material:

Housing: PBT,UL94V-0

Contacts: Brass

Plating: Au Or Sn Over Ni

Electrical Characteristics:

Current Rating : 1.5AMP

Withstand Voltage: 500V AC

Insulator Resistance: 1000M ohm Min

Contact Resistance: 20M ohm Max

Operating Temperature:-40°C~+105°C

Max.Processing Temp:180°C For 30-60
Seconds (200°C For 10 Seconds)

Order Information:

RHTAY01BY-XX-G-E-L

IDC Connectors

2.00mm Pitch

XX-No.of 08~64pin



Color:B-Black G-Gray

Type:

E-With Ears N-Without Ears

Latch Type

L-Long Latch S-Short Latch

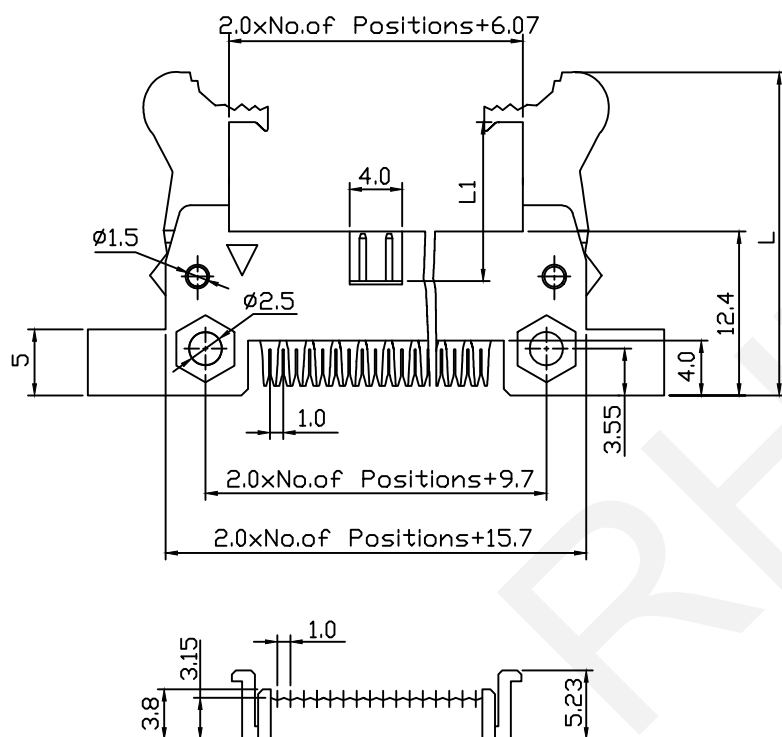

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.0mm Pitch IDC Ejector Header Connectors

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAY01BY-XX-G-E-L

±0.12


±0.15

±0.3

±0.5

APPR BY ZHAN

RoHS Compliance

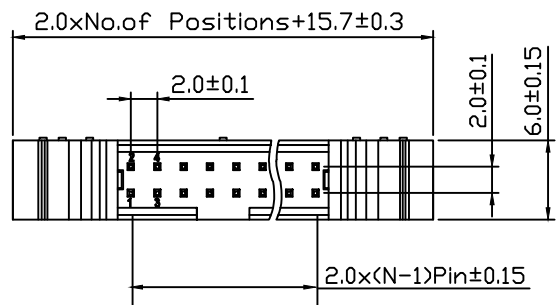

NAME	DIM L	DIM L1
Long Latch	24.00	11.50
Short Latch	21.20	8.70

Material:

Housing: PBT,UL94V-0

Contacts: Brass

Plating: Au Or Sn Over Ni

Electrical Characteristics:

Current Rating : 1.5AMP


Withstand Voltage: 500V AC

Insulator Resistance: 1000M ohm Min

Contact Resistance: 20M ohm Max

Operating Temperature:-40°C~+105°C

Max.Processing Temp:180°C For 30-60
Seconds (200°C For 10 Seconds)

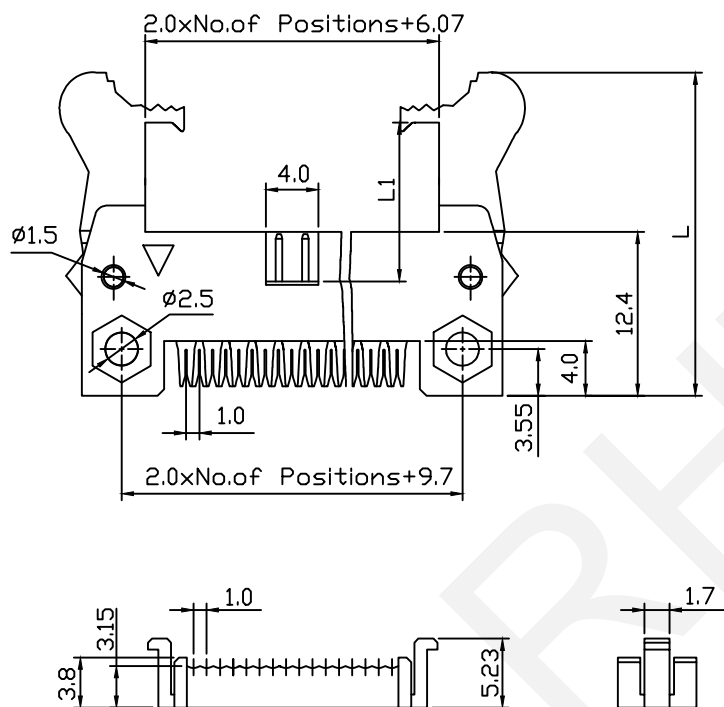

Order Information:

RHTAY01BY-XX-G-N-L

IDC Connectors

2.00mm Pitch

XX-No.of 08~64pin

Color:B-Black G-Gray

Type:

E-With Ears N-Without Ears

Latch Type

L-Long Latch S-Short Latch

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.0mm Pitch IDC Ejector Header Connectors

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY01BY-XX-G-N-L