

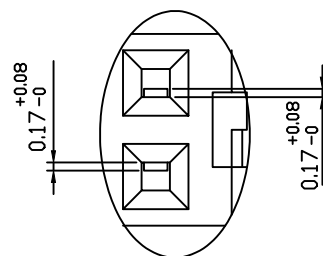
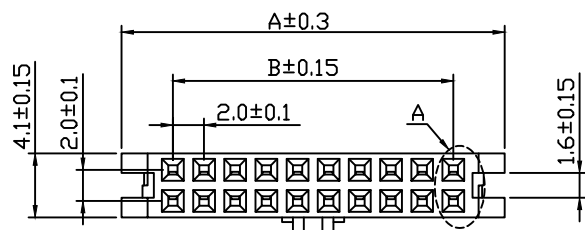
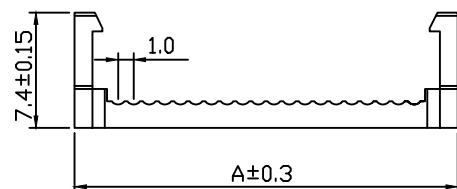


RoHS Compliance



DETAIL A
Scale:3:1

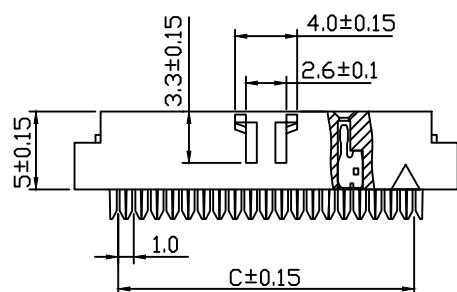

Material:

Housing: 30% Glass filled PBT UL94V-0

Contacts: Phosphor Bronze

Plating: Au Or Sn 50u" Over Ni

Electrical Characteristics:

Current Rating : 1.0AMP

Insulator Resistance: 1000M ohm Min

Withstand Voltage: 1000V AC/Minute

Contact Resistance: 20M ohm Max

Operating Temperature: -40°C ~ +105°C

Max. Processing Temp: 180°C For 30-60

Seconds (200°C For 10 Seconds)

Order Information:

RHTAY04BD-XX-B

IDC Connectors

2.00mm Pitch

XX-No. of 06~64pin

Color:

B-Black G-Gray L=Blue

Pin	Dimension mm		
	A	B	C
06	10.60	4.00	5.00
08	12.60	6.00	7.00
10	14.60	8.00	9.00
12	16.60	10.00	11.00
14	18.60	12.00	13.00
16	20.60	14.00	15.00
20	24.60	18.00	19.00
26	30.60	24.00	25.00
30	34.60	28.00	29.00
34	33.60	32.00	33.00
40	44.60	38.00	39.00
44	48.60	42.00	43.00
50	54.60	48.00	49.00
64	68.60	62.00	63.00

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 2.0mm IDC Socket Connector AMP

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAY04BD-XX-B