

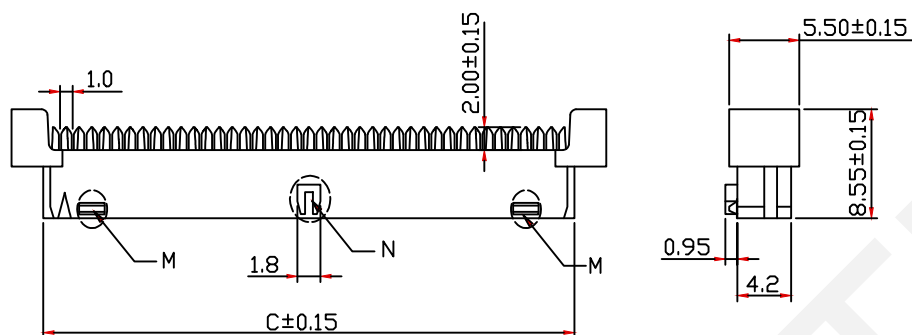


RoHS Compliance

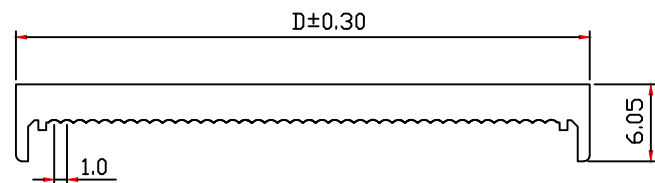

Pin	Dimension mm			
	A	B	C	D
10	16.65	8.00	11.65	15.00
12	18.65	10.00	18.65	17.00
14	20.65	12.00	15.65	19.00
16	22.65	14.00	17.65	21.00
20	26.65	18.00	21.65	25.00
22	28.65	20.00	23.65	27.00
24	30.65	22.00	25.65	29.00
26	32.65	24.00	27.65	31.00
30	36.65	28.00	31.65	35.00
32	38.65	30.00	33.65	37.00
34	40.65	32.00	35.65	39.00
36	42.65	34.00	37.65	41.00
40	46.65	38.00	41.65	45.00
44	50.65	42.00	45.65	49.00
50	56.65	48.00	51.65	55.00

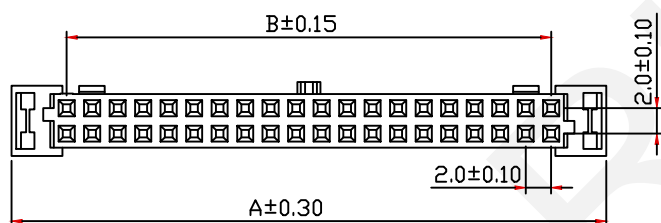

Material:

Housing: PBT UL94V-0

Contacts: Brass

Plating: Au Or Sn 50u" Over Ni

Electrical Characteristics:

Current Rating : 1.0AMP

Insulator Resistance: 1000M ohm Min

Withstand Voltage: 1000V AC/Minute

Contact Resistance: 20M ohm Max

Operating Temperature: -40°C~+105°C

Max. Processing Temp: 180°C For 30-60
Seconds (200°C For 10 Seconds)

Note:

10P~12P With Slot N, Without Slot M

14P~50P With Slot M and N

10P~50P With Slot N, Without Slot M

Order Information:

RHTAY04BE-XX-B

IDC Connectors

2.00mm Pitch

XX-No. of 06~100pin

Color:

B-Black G-Gray L=Blue

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 2.0mm IDC Socket Connector AMP

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY04BE-XX-B