


RoHS Compliance

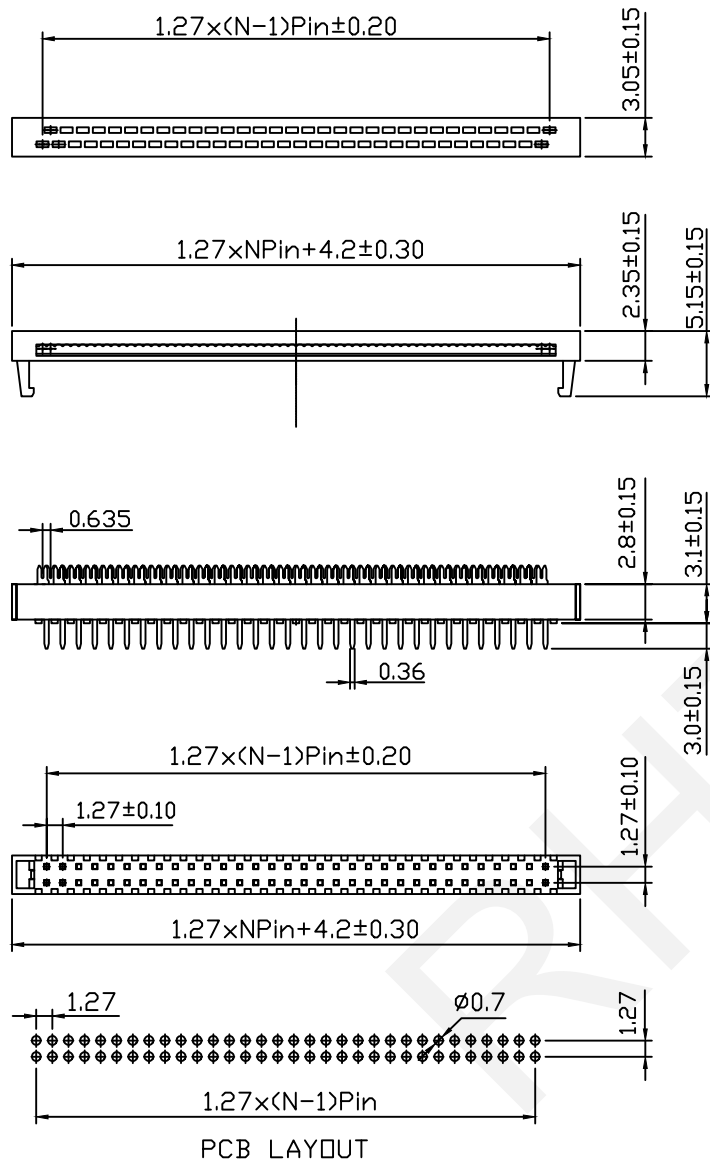

Material:

Housing: PBT,UL94V-0

Contacts: Brass

Plating: Au Or Sn 50u" Over Ni

Electrical Characteristics:

Current Rating : 1.0AMP

Withstand Voltage: 500V AC

Insulator Resistance: 1000M ohm Min

Contact Resistance: 20M ohm Max

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Max.Processing Temp: 180°C For 30-60

Seconds (200°C For 10 Seconds)

Order Information:

RHTAY05C-XX-B

IDC Connectors

1.27mm Pitch

XX-No.of 06~68pin

Color:B-Black

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27mm Pitch IDC Connector Dip Plug Type

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



RHTAY05C-XX-B