


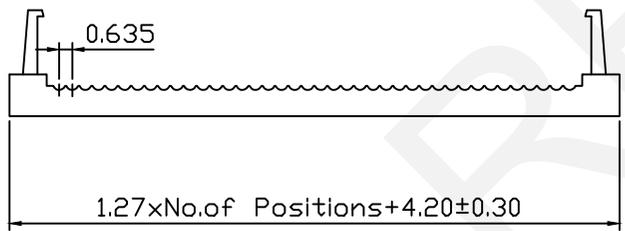
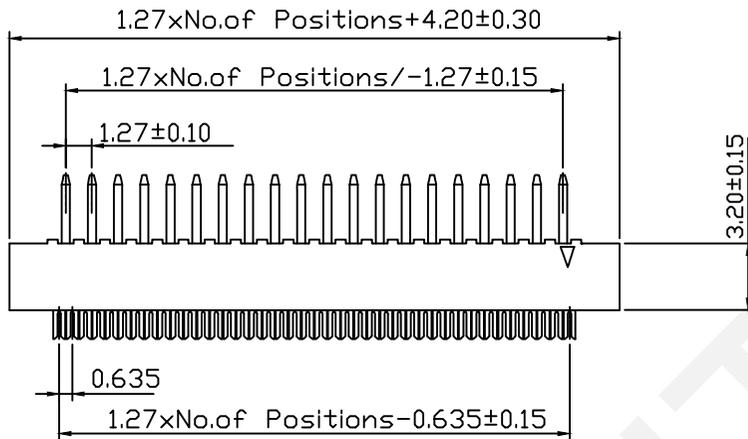


RoHS Compliance

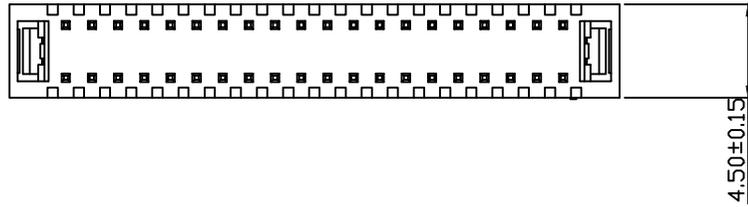


Material:
 Housing: PBT,UL94V-0
 Contacts: Phosphor Bronze
 Plating: Au Or Sn 50u" Over Ni

Electrical Characteristics:
 Current Rating : 1.0AMP
 Withstand Voltage: 500V AC
 Insulator Resistance: 1000M ohm Min
 Contact Resistance: 20M ohm Max
 Operating Temperature:-40°C~+105°C
 Max.Processing Temp:180°C For 30-60
 Seconds (200°C For 10 Seconds)

Order Information:
RHTAY05D-XX-B
 IDC Connectors
 1.27x2.54mm Pitch
 XX-No.of 10~80pin
 Color:B-Black

UNITS:mm	SHEET SIZE: A4				SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	1.27x2.54mm Pitch IDC Connector Dip Plug Type	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	RHTAY05D-XX-B	



NINGBO RHT ELECTRONIC CO.,LTD

G

G