
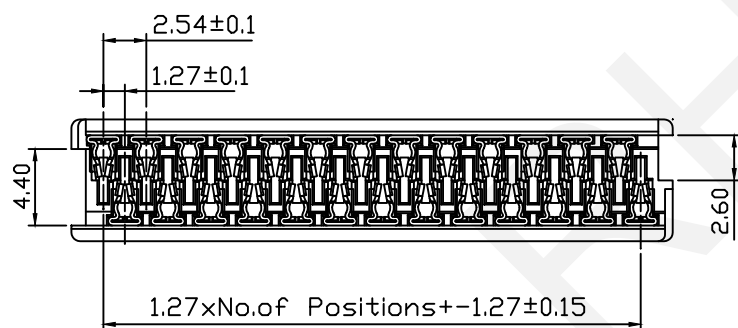




RoHS Compliance

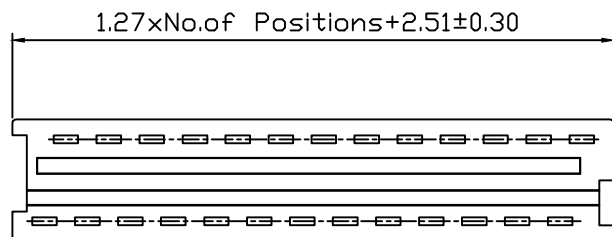

Material:Housing:30% Glass filled PBT UL94V-0
Contacts: Phosphor Bronze
Plating: Sn Over 50u" Nickel
Applicable Wire: 26AWG And 28AWG

Electrical Characteristics:
Current Rating : 1.0AMP
Voltage Rating: 250V AC
Insulator Resistance: 1000M Ohm Min
Withstand Voltage: 500V AC/Minute
Contact Resistance: 20M Ohm Max
Operating Temperature:-40°C~+105°C

Order Information:

RHTAY06-XX-W

IDC Connectors-
1.27mm Pitch
XX-No.of 06~26pin-
Color:W=White

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
±0.12	±0.15	±0.3

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

1.27mm Pitch Molex 90327
Picoflex Dip Plug IDC Connector



RHTAY06-XX-W