
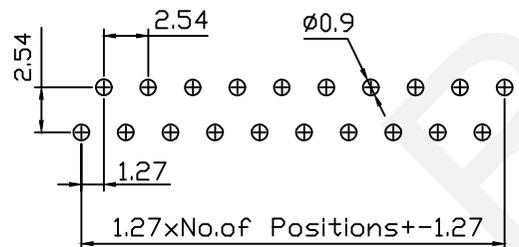

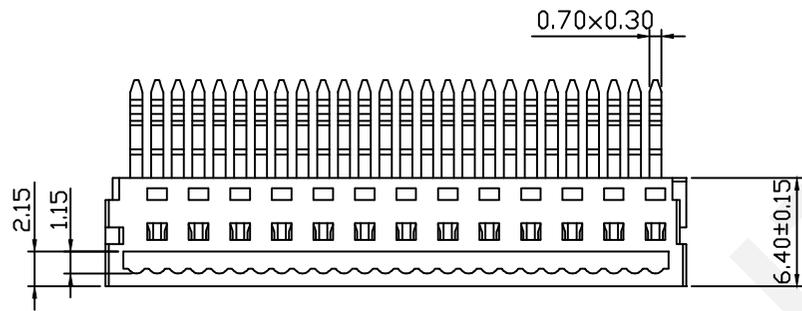


RoHS Compliance

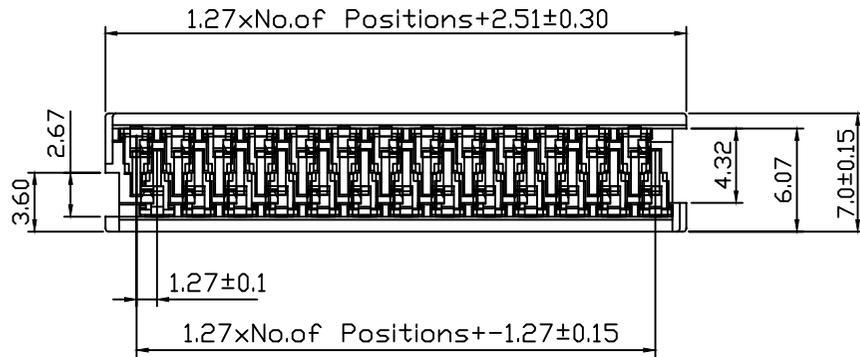

Recommended P.C.Board Layout

Material:Housing:30% Glass filled PBT UL94V-0  
 Contacts: Phosphor Bronze  
 Plating: Sn Over 50u" Nickel  
 Applicable Wire: 26AWG And 28AWG

Electrical Characteristics:  
 Current Rating : 1.0AMP  
 Voltage Rating: 250V AC  
 Insulator Resistance: 1000M Ohm Min  
 Withstand Voltage: 500V AC/Minute  
 Contact Resistance: 20M Ohm Max  
 Operating Temperature:-40°C~+105°C

Order Information:


RHTAY06B-XX-W

INDICATORS  
 IDC Connectors  
 1.27mm Pitch  
 XX-No.of 06~26pin  
 Color:W=White

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG  
 APPR BY ZHAN

1.27mm Pitch Molex 905847  
 Picoflex Dip Plug IDC Connector  
 THIRD ANGLE PROJECTION  
  
 RHTAY06B-XX-W