

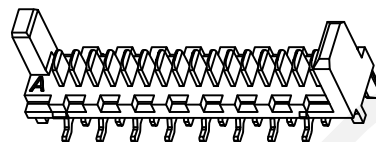
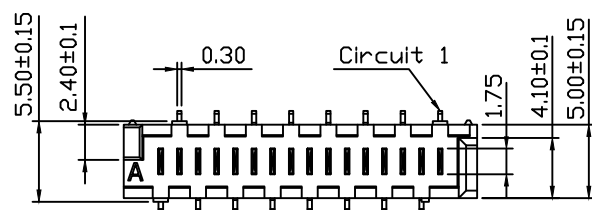
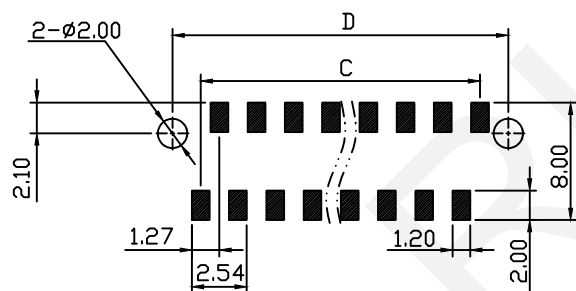



RoHS Compliance

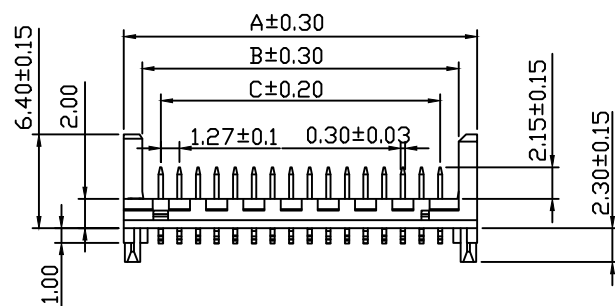

Material:
Housing: PA6T,UL94V-0,White
Contacts: Brass
Plating: Sn Over 50u" Nickel

Electrical Characteristics:
Current Rating : 1.2AMP
Voltage Rating : 250V AC
Insulator Resistance: 1000M ohm min.
Withstand Voltage: 500V AC/Minute
Contact Resistance: 20M ohm Max
Operating Temperature:-40°C~+105°C



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Order Information:

RHTAYICM-XX-CR

IDC Connectors

1.27mm Pitch

XX-No.of 04~26pin

Packing:CR=Cap+Reel

Pin	Dimension mm			
	A	B	C	D
04	8.86	6.35	3.81	7.41
06	11.40	8.89	6.35	9.95
08	13.94	11.43	8.89	12.49
10	16.48	13.94	11.43	15.03
12	19.02	16.51	13.97	17.57
14	21.56	19.05	16.51	20.11
16	24.10	21.59	19.05	22.65
18	26.64	24.13	21.59	25.19
20	29.18	26.67	24.13	27.73
22	31.72	29.21	26.67	30.27
24	34.26	31.75	29.21	32.81
26	36.80	34.29	31.75	35.35



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

1.27mm Pitch MOLEX 90814 Picoflex
SMD Ribbon Cable Connectors

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYICM-XX-CR

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN