

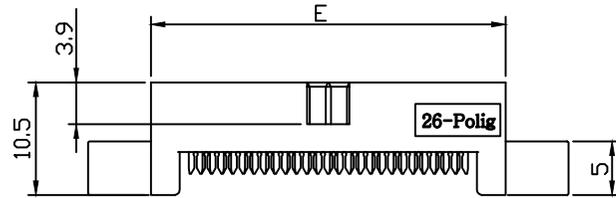
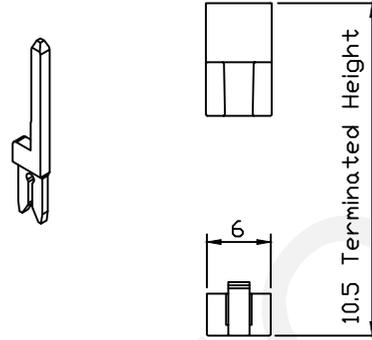


RoHS Compliance

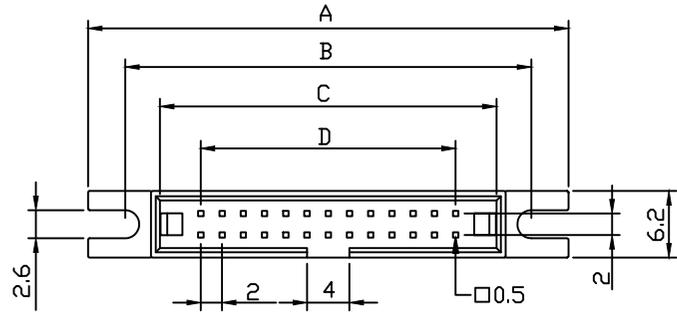

Pin	Dimension mm				
	A	B	C	D	E
06	18.24	18.24	11.70	4.00	13.40
08	20.24	20.24	13.70	6.00	15.40
10	22.24	22.24	15.70	8.00	17.40
12	24.24	24.24	17.70	10.00	19.40
14	26.24	26.24	19.70	12.00	21.40
16	28.24	28.24	21.70	14.00	23.40
20	32.24	32.24	25.70	18.00	27.40
22	34.24	34.24	27.70	20.00	29.40
24	36.24	36.24	29.70	22.00	31.40
26	38.24	38.24	31.70	24.00	33.40
30	42.24	42.24	35.70	28.00	37.40
34	46.24	46.24	39.70	32.00	41.40
40	52.24	52.24	45.70	38.00	47.40
44	56.24	56.24	49.70	42.00	51.40
50	62.24	62.24	55.70	48.00	57.40
68	80.24	80.24	73.70	66.00	75.40

Material:

Housing: PBT,UL94V-0

Contacts: Brass

Plating: Au Or Sn Over Ni

Electrical Characteristics:

Current Rating : 1.0AMP

Withstand Voltage: 500V AC

Insulator Resistance: 1000M ohm Min

Contact Resistance: 20M ohm Max

Operating Temperature:-40°C~+105°C

Max.Processing Temp:180°C For 30-60
Seconds (200°C For 10 Seconds)

Order Information:

RHTAY01BZ-XX-G-E

IDC Connectors

2.00mm Pitch

XX-No.of 06~68pin

Color:B-Black G-Gray

Type:

E-With Ears N-Without Ears

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

2.0mm Pitch IDC Ejector Header Connectors

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

±0.12

±0.15

±0.3



±0.5

APPR BY ZHAN



RHTAY01BZ-XX-G-E

RoHS Compliance

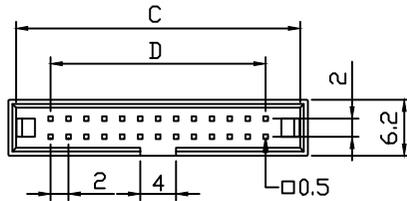

Material:

Housing: PBT,UL94V-0

Contacts: Brass

Plating: Au Or Sn Over Ni

Electrical Characteristics:

Current Rating : 1.0AMP

Withstand Voltage: 500V AC



Insulator Resistance: 1000M ohm Min

Contact Resistance: 20M ohm Max

Operating Temperature:-40°C~+105°C

Max.Processing Temp:180°C For 30-60

Seconds (200°C For 10 Seconds)

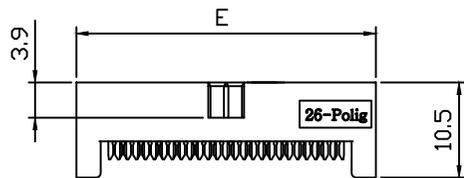

Pin	Dimension mm		
	C	D	E
06	11.70	4.00	13.40
08	13.70	6.00	15.40
10	15.70	8.00	17.40
12	17.70	10.00	19.40
14	19.70	12.00	21.40
16	21.70	14.00	23.40
20	25.70	18.00	27.40
22	27.70	20.00	29.40
24	29.70	22.00	31.40
26	31.70	24.00	33.40
30	35.70	28.00	37.40
34	39.70	32.00	41.40
40	45.70	38.00	47.40
44	49.70	42.00	51.40
50	55.70	48.00	57.40
68	73.70	66.00	75.40

Order Information:

RHTAY01BZ-XX-G-N

IDC Connectors

2.00mm Pitch

XX-No.of 06~68pin

Color:B-Black G-Gray

Type:


E-With Ears N-Without Ears

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

2.0mm Pitch IDC Ejector Header Connectors



RHTAY01BZ-XX-G-N