
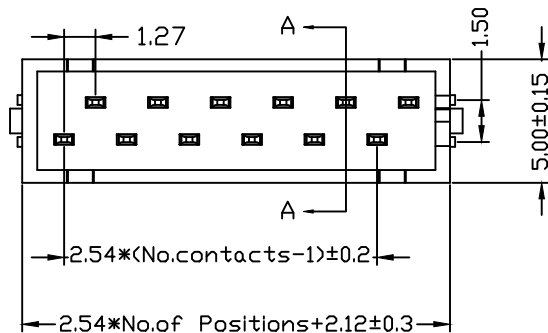
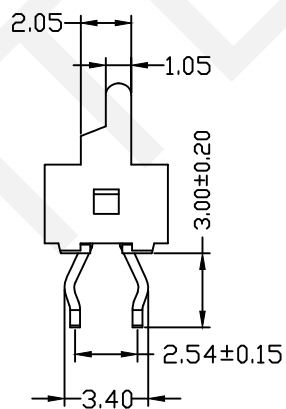


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

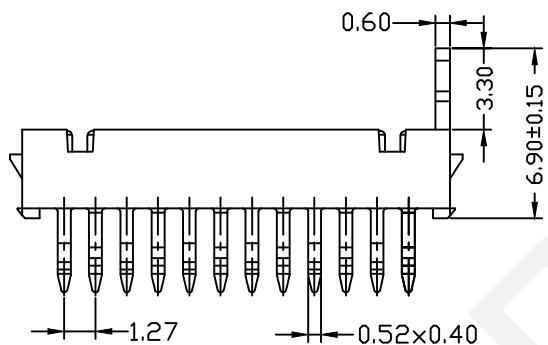

HSF RoHS

SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max at DC 100mA

Withstand Voltage:500V AC/DC 50Hz For 1minute

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃

Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PA46/PBT

Ordering Information

RHTAYDC-XX M S SN X N X 01

No.of Pins	Contact S0:Gold Flash/Tin	Plating Option	Insulator Material	Packing
2-40	SN:tin	A=BK-PBT D=BK-PA46		T=Tube R=Reel



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONNECTOR IDC RED BOARD
DIP TIN PLATED TUBE ROHS

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTAYDC-20MSSNANT01

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN