




RoHS Compliance

Material:  
 Housing: PBT UL94V-0  
 Contacts: Brass  
 Plating: Au Or Sn 50u" Over Ni



Electrical Characteristics:  
 Current Rating : 3.0AMP  
 Insulator Resistance: 1000M ohm Min  
 Withstand Voltage: 1000V AC/Minute  
 Contact Resistance: 20M ohm Max  
 Operating Temperature: -40°C~+105°C  
 Max.Processing Temp: 180°C For 30-60  
 Seconds (200°C For 10 Seconds)

Note:  
 6P Without Slot M and N  
 8P 12P With Slot M, Without Slot N  
 14P~64P With Slot M and N





Order Information:  
RHTAY04AB-XX-B  
 IDC Connectors  
 2.54mm Pitch  
 XX-No.of 06~50pin  
 Color: \_\_\_\_\_  
 B-Black G-Gray L=Blue

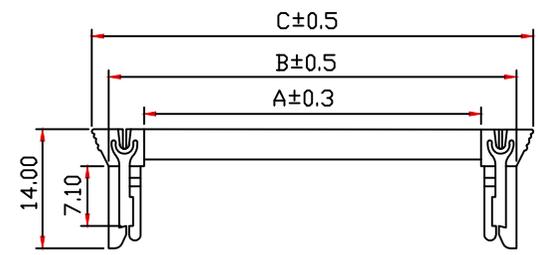

SINGLE HORIZONTAL TYPE

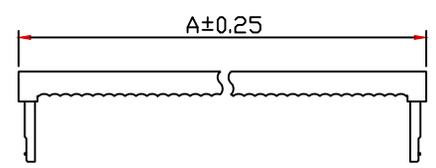


Pin	Dimension mm		
	A	B	C
06	8.02	17.00	21.40
08	10.56	19.54	23.94
10	13.10	22.08	26.48
12	15.64	24.62	29.02
14	18.18	27.16	31.56
16	20.72	29.70	34.10
18	23.26	32.24	36.64
20	25.80	34.78	39.18
24	30.88	39.86	44.26
26	33.42	42.40	46.80
30	38.50	47.48	51.88
34	43.58	52.56	56.96
40	51.20	60.18	64.58
50	63.90	72.88	77.28

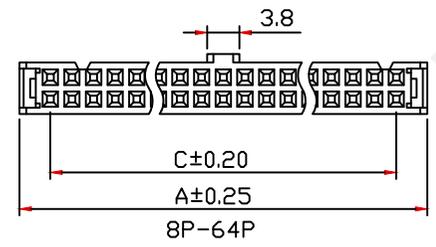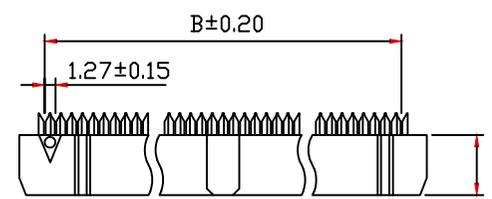

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm SHEET SIZE: A4 SCALE:--- DRWN BY PAN  
 0~3 3~18 18~50 50~120 CHK'D BY FENG  
 ±0.12 ±0.15 ±0.3 ±0.5 APPR BY ZHAN

2.54mm Pitch IDC Socket Connector  
 THIRD ANGLE PROJECTION  
  
 RHTAY04AB-XX-B