


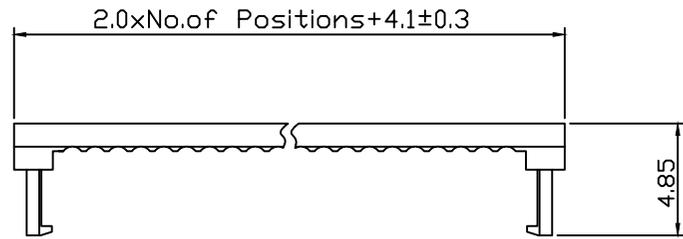




RoHS Compliance

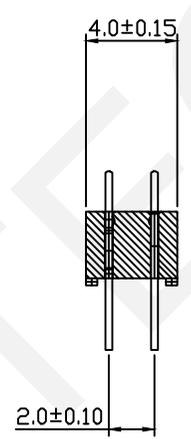

Material:
 Housing: PBT,UL94V-0
 Contacts: Brass
 Plating: Au Or Sn 50u" Over Ni

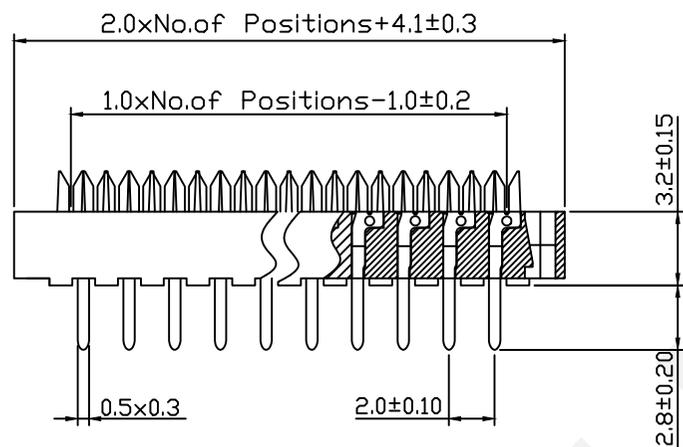

Electrical Characteristics:
 Current Rating : 1.0AMP
 Withstand Voltage: 500V AC
 Insulator Resistance: 1000M ohm Min
 Contact Resistance: 20M ohm Max
 Operating Temperature:-40°C~+105°C
 Max.Processing Temp:180°C For 30-60 Seconds (200°C For 10 Seconds)

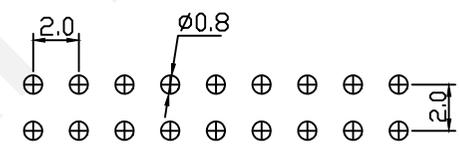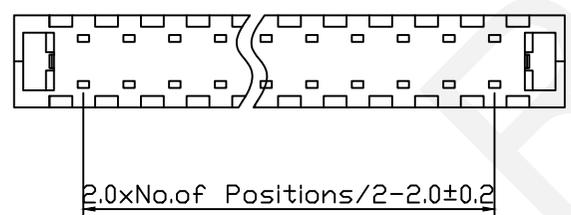


PCB LAYOUT

Order Information:
RHTAY05B-XX-B
 IDC Connectors
 2.00mm Pitch
 XX-No.of 04~80pin
 Color:B-Black G-Gray

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
 APPR BY ZHAN

2.00mm Pitch Dip Plug Connector
 THIRD ANGLE PROJECTION

 RHTAY05B-XX-B