
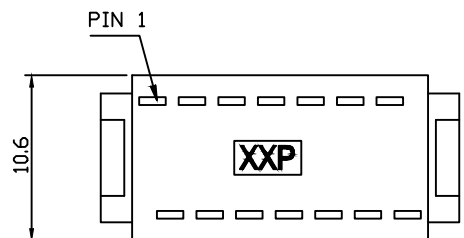
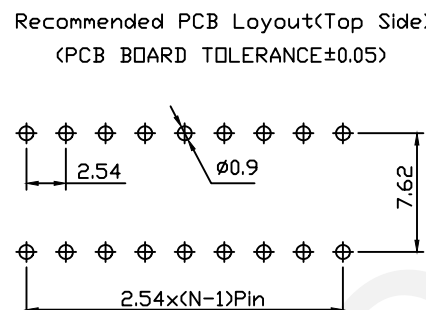
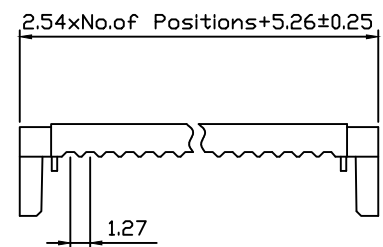

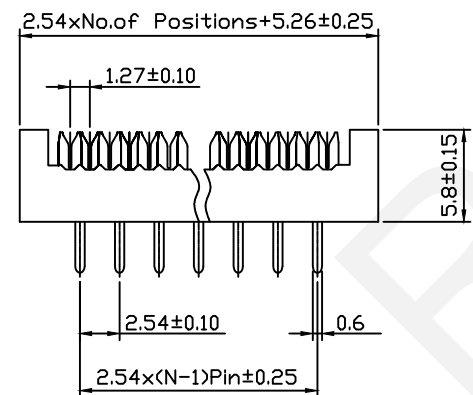


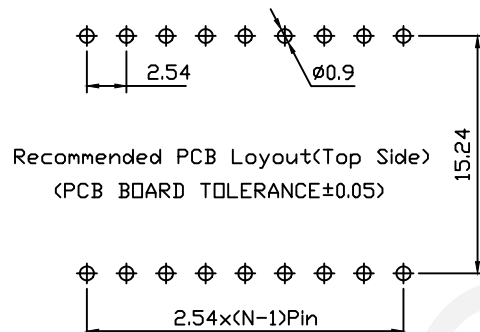






1		2		3		4		5		6		7		8		9		
RoHS Compliance																		
A																	A	
B					Recommended PCB Layout(Top Side) (PCB BOARD TOLERANCE±0.05) 				Material: Housing: PBT,UL94V-0 Contacts: Brass Plating: Au Or Sn Over Ni								B	
C									Electrical Characteristics: Current Rating : 3.0AMP Withstand Voltage: 500V AC Insulator Resistance: 1000M ohm Min Contact Resistance: 20M ohm Max Operating Temperature:-40°C~+105°C Max.Processing Temp:180°C For 30-60 Seconds (200°C For 10 Seconds)								C	
D																	D	
E									Order Information: RHTAY05X-XX-B IDC Connectors 2.54x7.62mm Dip Plug XX-No.of 08~40pin Color:B-Black G-Gray								E	
F																	F	
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm		SHEET SIZE: A4		SCALE:---		DRWN BY PAN		2.54x7.62mm Pitch Dip Plug IDC Connector						G
			0~3		3~18		18~50		50~120		CHK'D BY FENG		THIRD ANGLE PROJECTION 				RHTAY05X-XX-B	
			±0.12		±0.15		±0.3		±0.5		APPR BY ZHAN							
1		2		3		4		5		6		7		8		9		

RoHS Compliance

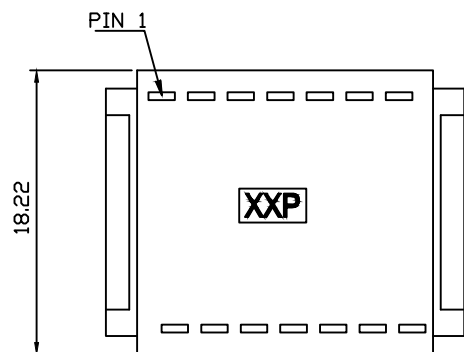

Material:
Housing: PBT,UL94V-0
Contacts: Brass
Plating: Au Or Sn Over Ni

Electrical Characteristics:
Current Rating : 3.0AMP
Withstand Voltage: 500V AC
Insulator Resistance: 1000M ohm Min
Contact Resistance: 20M ohm Max
Operating Temperature:-40°C~+105°C
Max.Processing Temp:180°C For 30-60
Seconds (200°C For 10 Seconds)

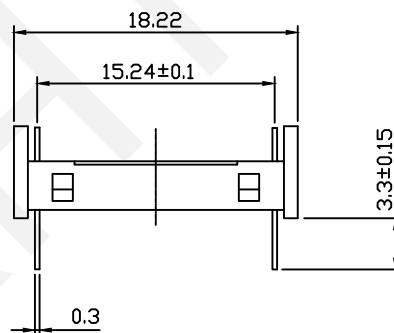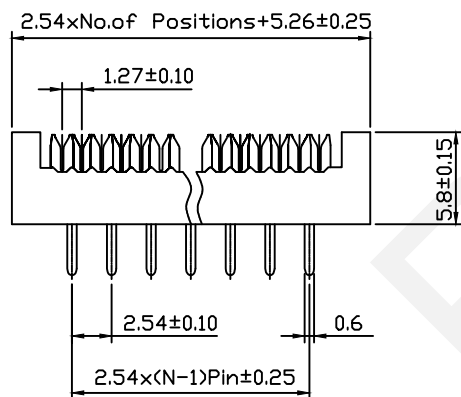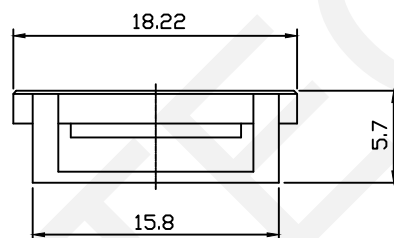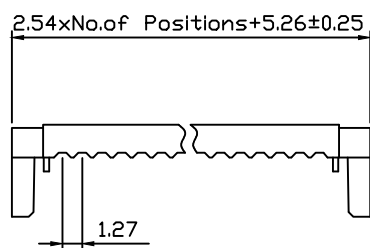

Order Information:

RHTAY05X-XXD-B

IDC Connectors
2.54x15.24mm Dip Plug
XX-No.of 08~40pin
Color:B-Black G-Gray


 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

2.54x15.24mm Pitch Dip Plug IDC Connector

THIRD ANGLE PROJECTION



RHTAY05X-XXD-B