
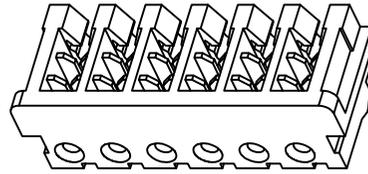




RoHS Compliance

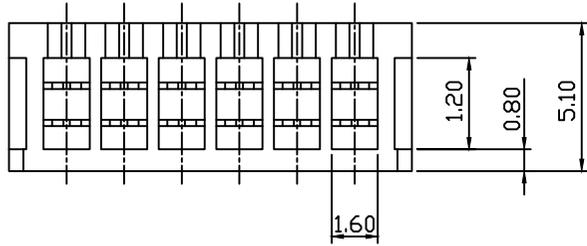

Material:  
 Housing:PBT UL94V-0  
 Contacts: Brass  
 Plating: Au Or Sn 50u" Over Ni

Electrical Characteristics:  
 Current Rating : 3.0AMP  
 Insulator Resistance: 1000M ohm Min  
 Withstand Voltage: 1000V AC/Minute  
 Contact Resistance: 20M ohm Max  
 Operating Temperature:-40°C~+105°C  
 Max.Processing Temp:180°C For 30-60  
 Seconds (200°C For 10 Seconds)

Butterfly Button

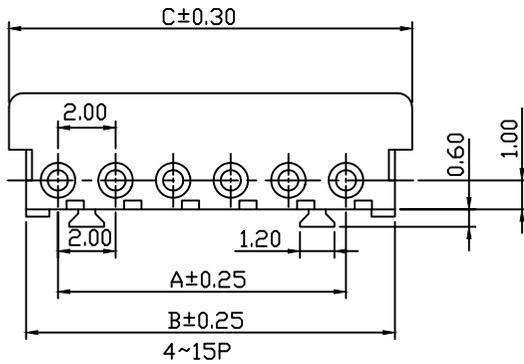



Pin	Dimension mm		
	A	B	C
02	-As Show-		
03	-As Show-		
04	6.00	8.80	10.00
05	8.00	10.80	12.00
06	10.00	12.80	14.00
07	12.00	14.80	16.00
08	14.00	16.80	18.00
09	16.00	18.80	20.00
10	18.00	20.80	22.00
11	20.00	22.80	24.00
12	22.00	24.80	26.00
13	24.00	26.80	28.00
14	26.00	28.80	30.00
15	28.00	30.80	32.00

Note:  
 6P Without Slot M and N  
 8P 12P With Slot M, Without Slot N  
 14P~64P With Slot M and N

Order Information:

RHTAYL6-2.00-XX

IDC Connectors  
 2.00mm Pitch  
 XX-No.of 02~15pin



**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG		APPR BY ZHAN	

2.00mm AMP IDC Type Wire Connector

THIRD ANGLE PROJECTION



RHTAYL6-2.00-XX