


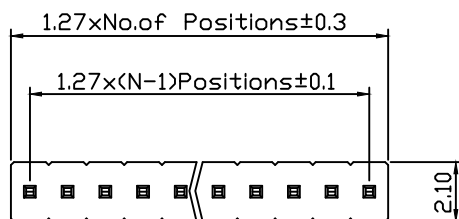



RoHS Compliance



Recommended P.C.B Hole Layout

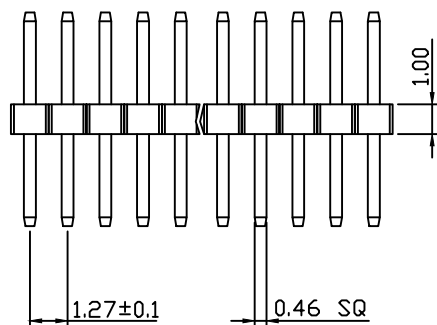

S1 Type



S2 Type

Dimension Antitheses List (mm)

ITEM	L1	L2	L3	Plastic Height
Standard	2.20	2.70	5.90	1.00
Nonstandard	---	---	---	---

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester,UL94V-0

Electrical Characteristics:

Rated Current: 1 AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max.Processing Temp:240°C For30-60
Seconds(260°C For 10 Seconds)

Order Information:

RHTAY07C-1.00-1-XX-S1-L1xL2xL3-G0

Pin Header Series

07C:1.27mm

Plastics Height:

1.00,1.50,1.70,2.00,2.50mm

Per Row:Single Layer

Pin: No. Of Pins (1x50)

Straight Pin:S1 Type,S2 Type

Size:L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



1.27mm Pin Header Single Layer,
Straight Pin, 1xN Pin

THIRD ANGLE PROJECTION




RHTAY07C-1.00-1-XX-S1-L1xL2xL3-G0


RoHS Compliance

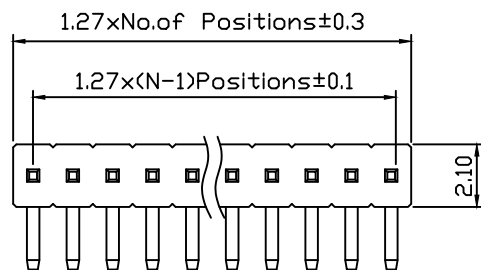


Recommended P.C.B Hole Layout

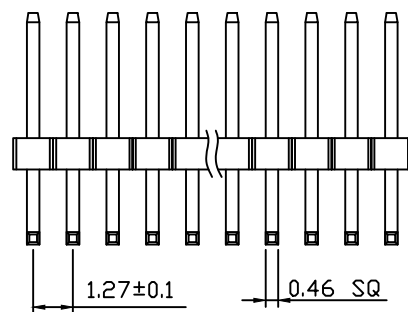

Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	2.20	2.90	1.20	1.50
Nonstandard	---	---	---	---

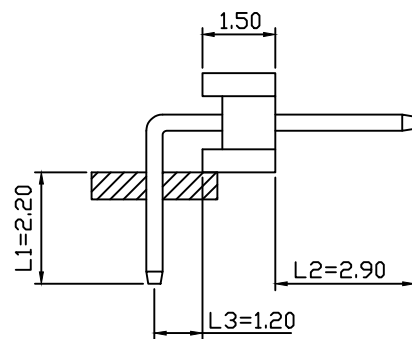

R2 Type

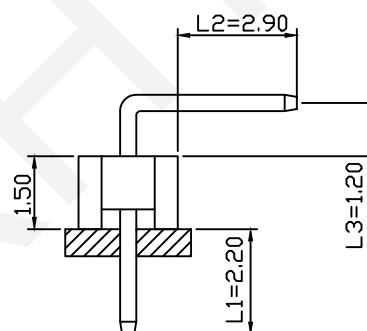

R1 Type

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester,UL94V-0

Electrical Characteristics:

Rated Current: 1AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max.Processing Temp:240°C For30~60 Seconds
(260°C For 10 Seconds)

Order Information:

RHTAY07C-1.50-1-XX-R1-L1xL2xL3-G0

Pin Header Series

07C:1.27mm

Plastics Height:

1.00,1.50,1.70,2.00,2.50mm

Per Row:Single Layer

Pin: No. Of Pins (1x50)

Right Angle Pin:R1 Type,R2 Type

Size:L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN




1.27mm Pin Header Single Layer,
Right Angle Pin, 1xN Pin

THIRD ANGLE PROJECTION



RHTAY07C-1.50-1-XX-R1-L1xL2xL3-G0


RoHS Compliance

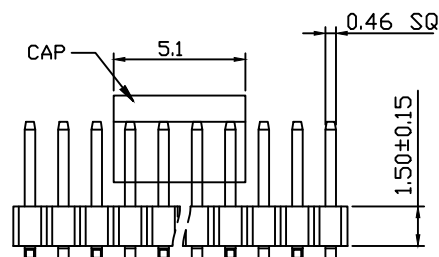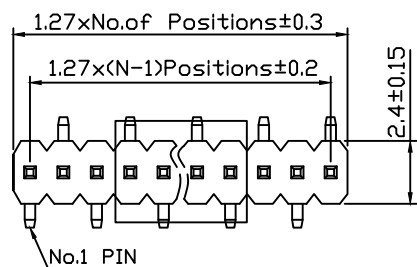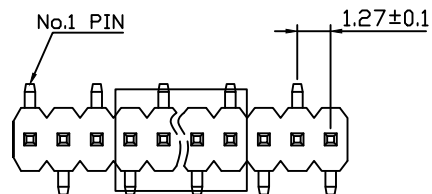



Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	4.20	2.90	0.56	1.50
Nonstandard	---	---	---	---

Recommended P.C.B Hole Layout

T1 Type

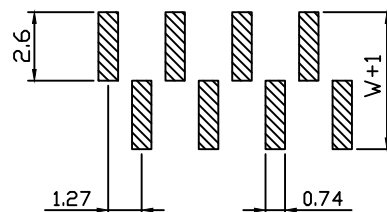

T2 Type

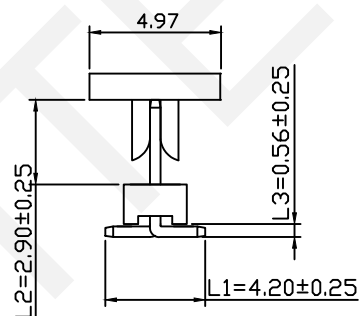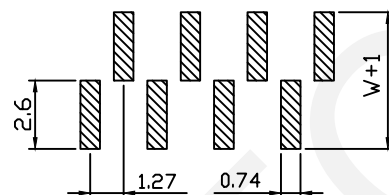

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1AMP

Contact Resistance: $20m\Omega$ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: $1000M\Omega$ Min

Mechanical

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Max. Processing Temp: 230°C For 30~60 Seconds
(260°C For 10 Seconds)

Order Information:

RHTAY07C-1.50-1-XX-T1-L1xL2xL3-G0

Pin Header Series

07C: 1.27mm

Plastics Height:

1.00, 1.50, 1.70, 2.00, 2.50mm

Per Row: Single Layer

Pin: No. of Pins (1x50)

SMT Pin: T1 Type, T2 Type

Size: L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u"

Gold G30=30u" Gold



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

1.27mm Pin Header Single Layer, SMT, 1xN Pin

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY07C-1.50-1-XX-T1-L1xL2xL3-G0


± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN



1

2

3

4

5



6

7



8

9


RoHS Compliance

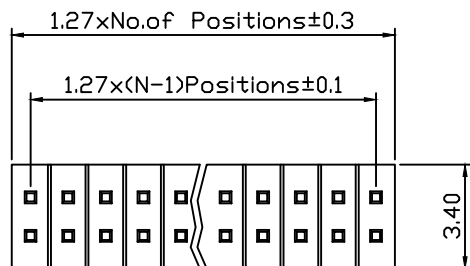

Recommended P.C.B Hole Layout

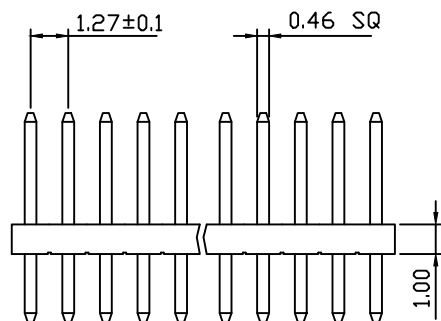

S1 Type



S2 Type

Dimension Antitheses List (mm)

ITEM	L1	L2	L3	Plastic Height
Standard	2.20	2.70	5.90	1.00
Nonstandard	---	---	---	---

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester,UL94V-0

Electrical Characteristics:

Rated Current: 1 AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max.Processing Temp:240°C For30-60

Seconds<260°C For10 Seconds>

Order Information:

RHTAY07C-1.00-2-XX-S1-L1xL2xL3-G0

Pin Header Series

07C:1.27mm

Plastics Height:

1.00,1.50,1.70,2.00,2.50mm

Per Row:Double Layer

Pin: No. Of Pins (2~100)

Straight Pin:S1 Type,S2 Type

Size:L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3


±0.5

CHK'D BY FENG

APPR BY ZHAN



1.27mm Pin Header Double Layer,
Straight Pin, 2xN Pin

THIRD ANGLE PROJECTION




RHTAY07C-1.00-2-XX-S1-L1xL2xL3-G0


RoHS Compliance

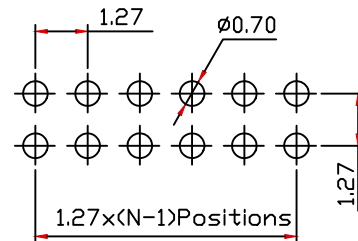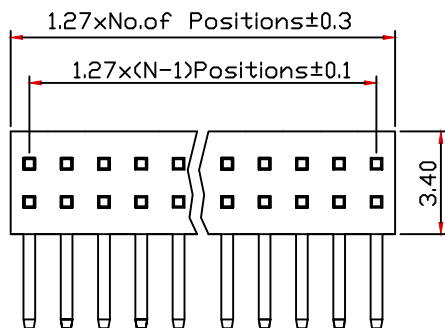


Recommended P.C.B Hole Layout

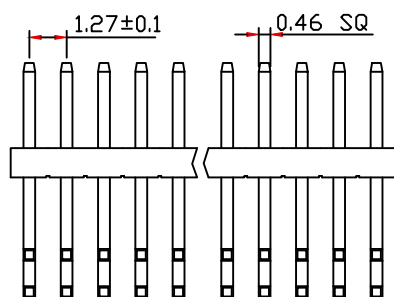

Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	2.20	2.90	1.20	1.50
Nonstandard	---	---	---	---

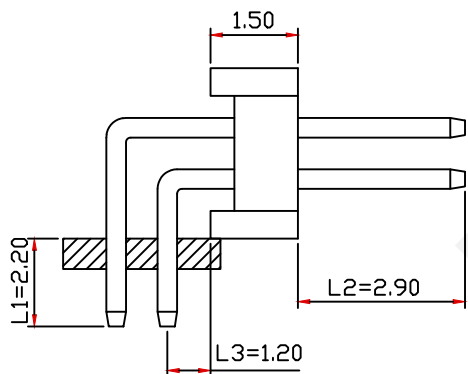

R1 Type

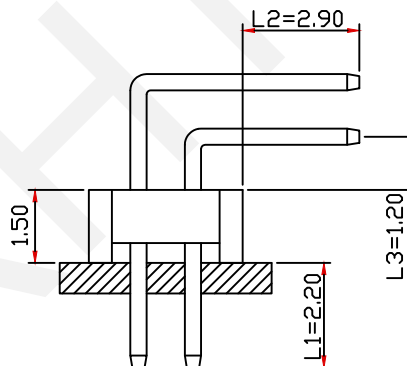

R2 Type

Material:
Standard: PA6T
Contact: Brass
Insulator: Polyester,UL94V-0
Electrical Characteristics:
Rated Current: 1 AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature: -40°C~+105°C
Max.Processing Temp:240°C For30-60
Seconds(260°C For10 Seconds)

Order Information:

RHTAY07C-1.50-2-XX-R1-L1xL2xL3-G0

Pin Header Series
07C:1.50mm
Plastics Height:
1.00,1.50,1.70,2.00,2.50mm
Per Row:Double Layer
Pin: No. Of Pins (2~100)
Right Angle Pin:R1 Type,R2 Type
Size:L1xL2xL3
Plating:
G0=Gold Flash G1=1u" Gold
G10=10u" Gold G15=15u" Gold
G30=30u" Gold




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

1.27mm Pin Header Double Layer,
Right Angle Pin, 2xN Pin






THIRD ANGLE PROJECTION



RHTAY07C-1.50-2-XX-R1-L1xL2xL3-G0

RoHS Compliance

Recommended P.C.B Hole Layout

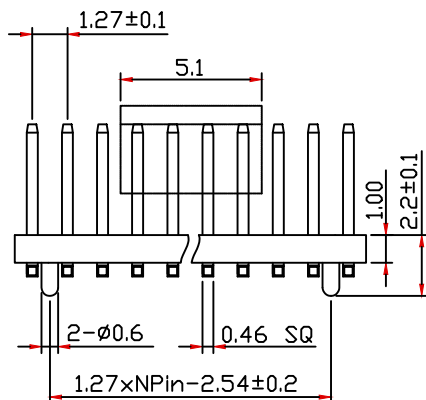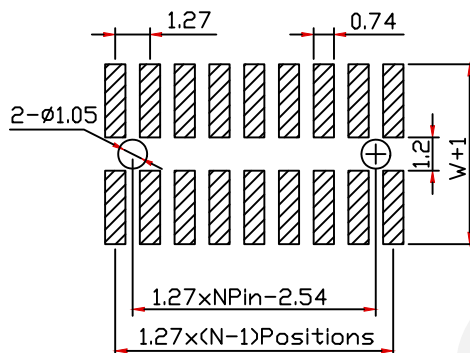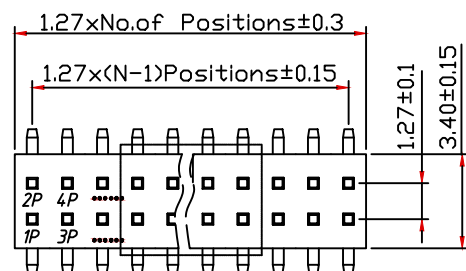

T3=With Post

T=W/O Post

Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	5.40	2.90	0.56	1.00
Nonstandard	---	---	---	---

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester,UL94V-0

Electrical Characteristics:

Rated Current: 1AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Order Information:

RHTAY07C-1.00-2-XX-T-L1xL2xL3-G0-B

Pin Header Series

07C:1.27mm

Plastics Height:

1.00,1.50,1.70,2.00,2.50mm

Per Row:Double Layer

Pin: No. Of Pins (2~80)

Post:T3=With Post T=W/O Post,

Size:L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold G10=10u"

Gold G15=15u" Gold G30=30u" Gold

Packing:

0=PE Bag A=Tray T=Tube

P=Tube+Cap R=Reel+Cap B=Box



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

1.27mm Pin Header Double Layer,
2xN Pin Horizontal SMT

THIRD ANGLE PROJECTION



RHTAY07C-1.00-2-XX-T-L1xL2xL3-G0-B