


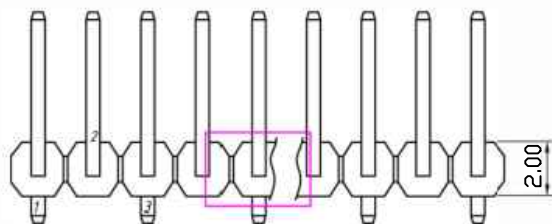




RoHS Compliance



T2 Type

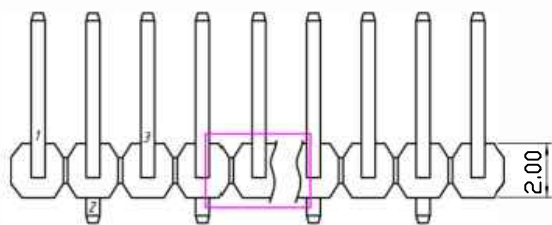

T1 Type

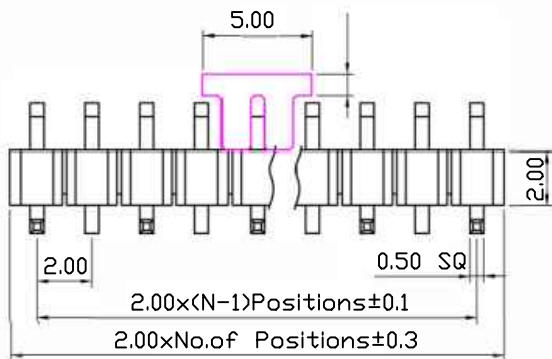

Dimension Antitheses List (mm)

ITEM	L1	L2	L3	W	Plastic Height
Standard	2.60	4.00	---	4.50	2.00
Nonstandard	---	---	---	---	---

Material:
Standard: PA6T
Contact: Brass
Insulator: Polyester, UL94V-0
Electrical Characteristics:
Rated Current: 1.5AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature: -40°C~+105°C
Max. Processing Temp: 230°C For 30-60 Seconds (260°C For 10 Seconds)

Order Information:

RHTAY07BB-1-XX-T1-L1xL2xL3xW-G0-N-R

Pin Header Series

07BB: 2.00mm

Per Row: Single Layer

Pin: No. of Pins (1x40)

SMT Pin: T1 Type, T2 Type

Size: L1xL2xL3xW

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold

Post: W=With Post N=W/□ Post

Packing:

0=PE Bag A=Tray T=Tube

P=Tube+Cap R=Reel+Cap

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



2.00mm Pin Header Single Layer,
1xN Pin Horizontal SMT

THIRD ANGLE PROJECTION





RHTAY07BB-1-XX-T1-L1xL2xL3xW-G0-N-R


RoHS Compliance

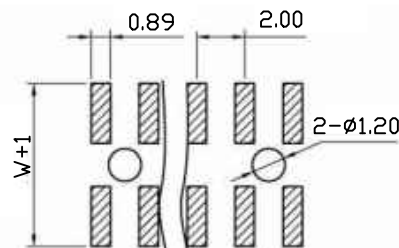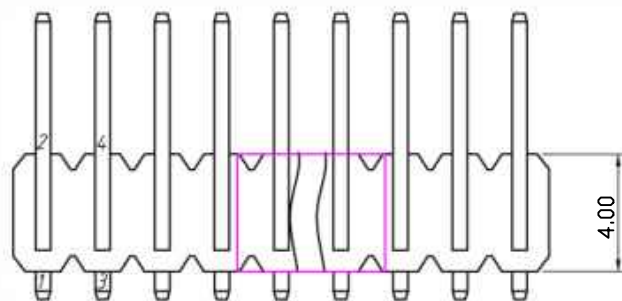

Recommended P.C.B Hole Layout

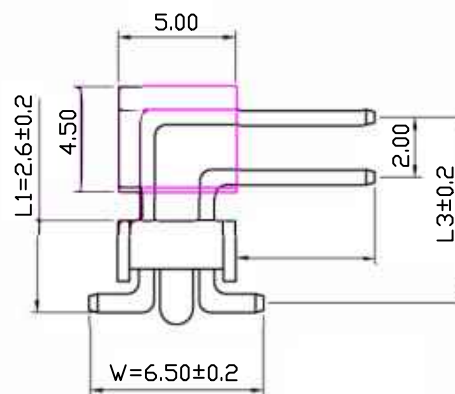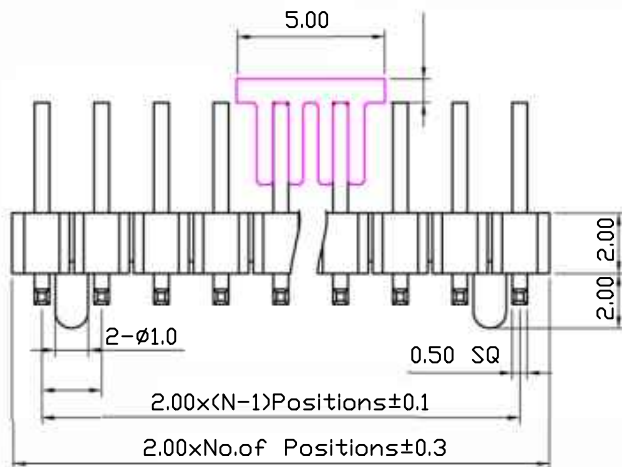

W=With Post

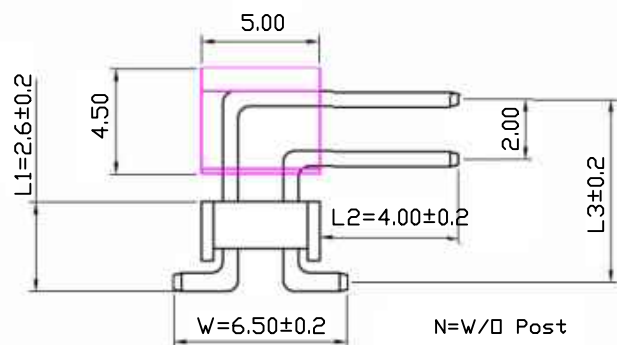

Dimension Antitheses List (mm)					
ITEM	L1	L2	L3	W	Plastic Height
Standard	2.60	4.00	---	6.50	2.00
Nonstandard	---	---	---	---	---

Material:
Standard: PA6T
Contact: Brass
Insulator: Polyester, UL94V-0
Electrical Characteristics:
Rated Current: 1.5AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature: -40°C~+105°C
Max. Processing Temp: 230°C For 30-60 Seconds (260°C For 10 Seconds)

Order Information:

RHTAY07BB-2-XX-T-L1xL2xL3xW-G0-W-R

Pin Header Series

07BB: 2.00mm

Per Row: Double Layer

Pin: No. Of Pins (02~80)

Type: Horizontal SMT

Size: L1xL2xL3xW

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold

Post: W=With Post N=W/D Post

Packing:

0=PE Bag A=Tray T=Tube

P=Tube+Cap R=Reel+Cap

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

2.00mm Pin Header Double Layer,
2xN Pin Horizontal SMT

THIRD ANGLE PROJECTION



RHTAY07BB-2-XX-T-L1xL2xL3xW-G0-W-R