

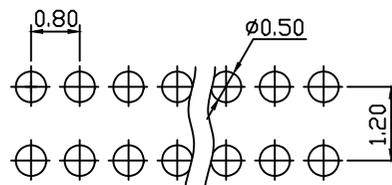
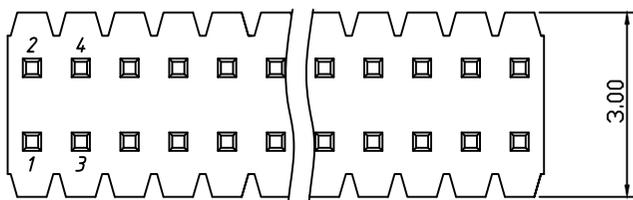


RoHS Compliance

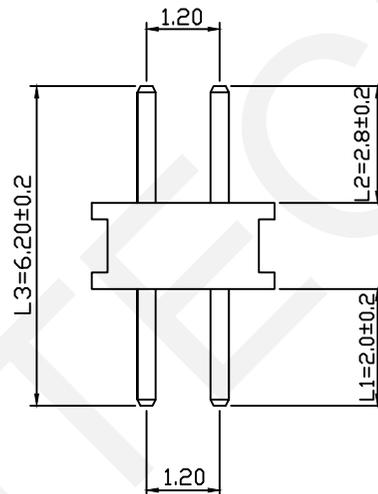

Recommended P.C.B Hole Layout

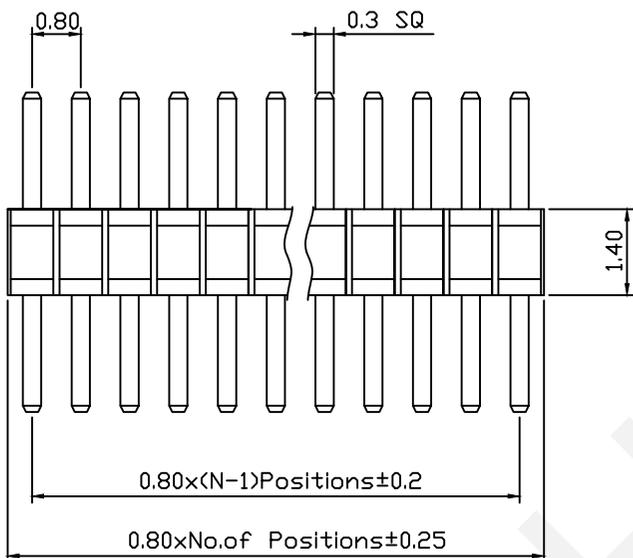

Material:
 Standard: LCP
 Contact: Brass
 Electrical Characteristics:
 Rated Current: 0.75AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulator Resistance: 1000MΩ Min
 Mechanical
 Operating Temperature: -40°C~+105°C

Order Information:
RHTAY07S-2-XX-S-L1xL2xL3-G0

Pin Header Series
 07S:0.80mm
 Per Row: Dual Row
 Pin: No. Of Pins (02~100)
 Type: Straight Pin.
 Size: L1xL2xL3
 Plating:
 G0=Gold Flash G1=1u" Gold
 G10=10u" Gold G15=15u" Gold
 G30=30u" Gold



Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	2.00	2.80	6.20	1.40
Nonstandard	---	---	---	---

RHTECP NINGBO RHT ELECTRONIC CO.,LTD



UNITS:mm SHEET SIZE: A4 SCALE:--- DRWN BY PAN
 0~3 3~18 18~50 50~120 CHK'D BY FENG
 ±0.12 ±0.15 ±0.3 ±0.5 APPR BY ZHAN

0.80mm Pin Header Dual Row,
 Straight Pin,2xN Pin
 THIRD ANGLE PROJECTION
 RHTAY07S-2-XX-S-L1xL2xL3-G0

RoHS Compliance

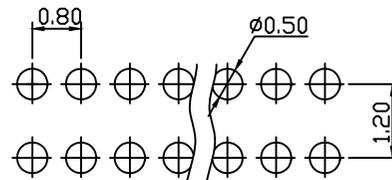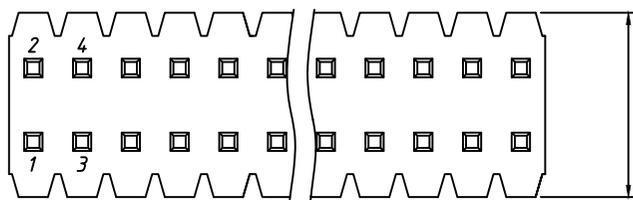

Recommended P.C.B Hole Layout

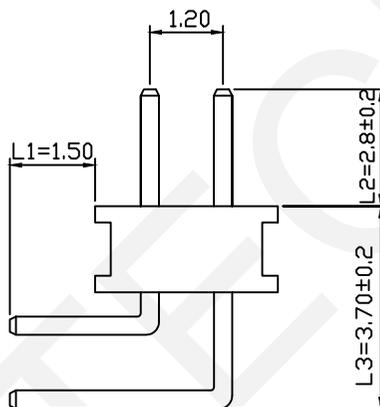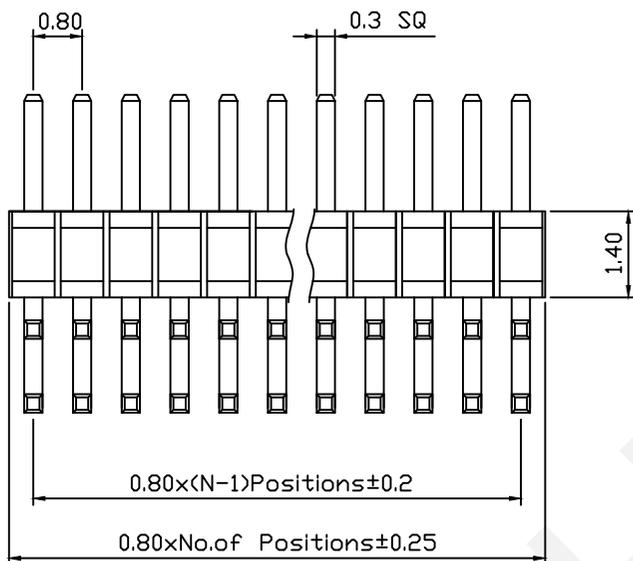

Material:
 Standard: LCP
 Contact: Brass
 Electrical Characteristics:
 Rated Current: 0.75AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulator Resistance: 1000MΩ Min
 Mechanical
 Operating Temperature: -40°C~+105°C

Order Information:
 RHTAY07S-2-XX-R-L1xL2xL3-G0

Pin Header Series
 07S:0.80mm
 Per Row: Dual Row
 Pin: No. Of Pins (02~100)
 Type: Right Angle Pin.
 Size: L1xL2xL3
 Plating:
 G0=Gold Flash G1=1u" Gold
 G10=10u" Gold G15=15u" Gold
 G30=30u" Gold

Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	1.50	2.80	3.70	1.40
Nonstandard	---	---	---	---

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

0.80mm Pin Header Dual Row, Right Angle Pin, 2xN Pin	
THIRD ANGLE PROJECTION 	RHTAY07S-2-XX-R-L1xL2xL3-G0





NINGBO RHT ELECTRONIC CO.,LTD

0.80mm Pin Header Dual Row,
Right Angle Pin, 2xN Pin

THIRD ANGLE PROJECTION


RHTAY07S-2-XX-R-L1xL2xL3-G0

RoHS Compliance

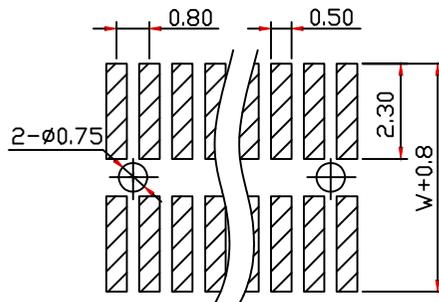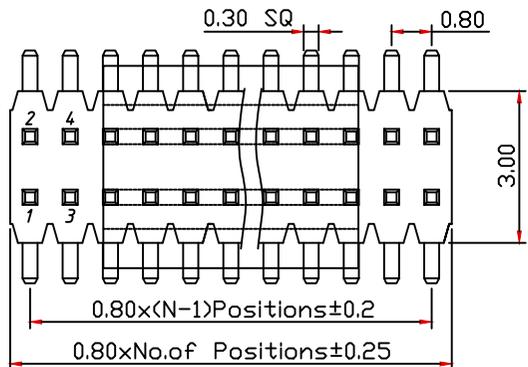

Recommended P.C.B Hole Layout



Material:
 Standard: LCP
 Contact: Brass
 Electrical Characteristics:
 Rated Current: 0.75AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulator Resistance: 1000MΩ Min
 Mechanical
 Operating Temperature: -40°C~+105°C
 Max.Processing Temp:230°C For30-60
 Seconds(260°C For10 Seconds)

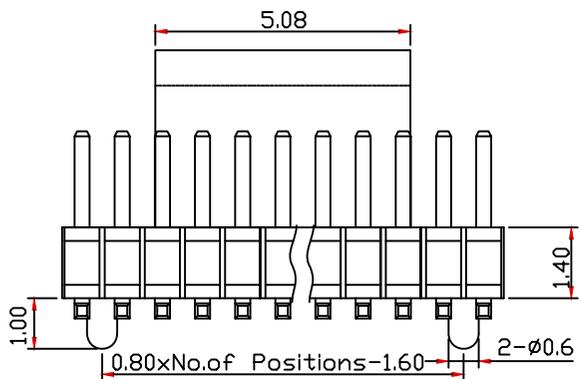

Dimension Antitheses List (mm)				
ITEM	L2	L4	W	Plastic Height
Standard	2.80	1.80	4.60	1.40
Nonstandard	---	---	---	---

Order Information:
 RHTAY07S-2-XX-L2xL4xW-G0-W-R

Pin Header Series
 07S:0.80mm
 Per Row:Double Layer
 Pin: No. Of Pins (02~100)
 Size:L2xL4xW
 Plating:
 G0=Gold Flash G1=1u' Gold G10=10u'
 Gold G15=15u' Gold G30=30u' Gold
 Post:W=With Post N=W/D Post
 Packing:
 0=PE Bag A=Tray T=Tube
 P=Tube+Cap R=Reel+Cap

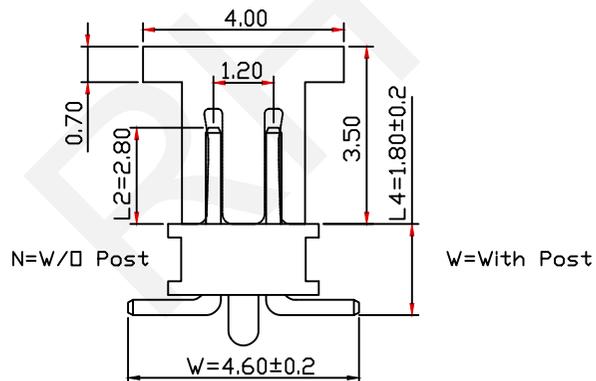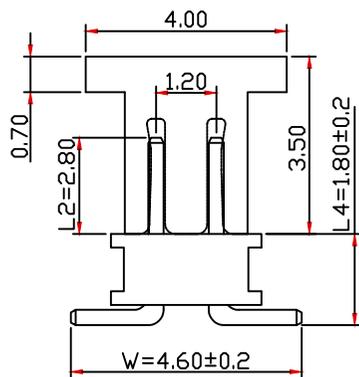

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

0.80mm Pin Header Double Layer,SMT Pin, 2xN Pin
 THIRD ANGLE PROJECTION
 RHTAY07S-2-XX-L2xL4xW-G0-W-R