


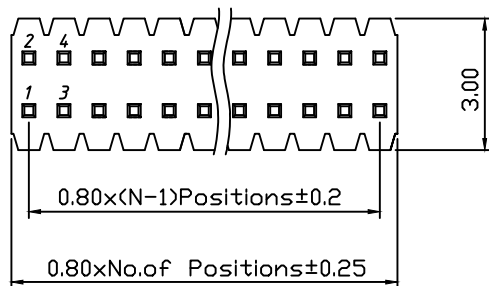


RoHS Compliance

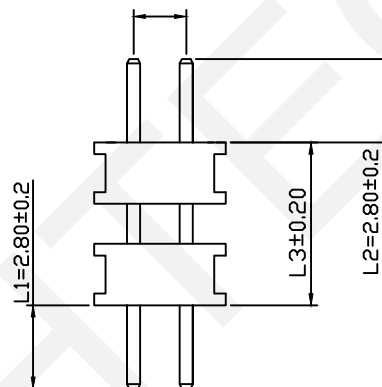

Recommended P.C.B Hole Layout

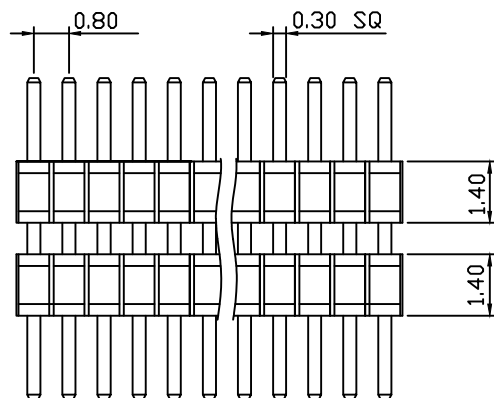

Dimension Antitheses List (mm)

ITEM	L1	L2	L3	Plastic Height
Standard	2.80	2.80	---	1.40
Nonstandard	---	---	---	---

Material:

Standard: PA9T

Contact: Phosphor Bronze

Electrical Characteristics:

Rated Current: 0.75AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max.Processing Temp:230°C For30-60

Seconds(260°C For10 Seconds)

Order Information:

RHTAY18K-2-XX-S-L1xL2xL3-G0

Pin Header Series

18K:0.80mm

Per Row:Double Layer

Pin: No. Of Pins (02~100)

Type: Straight Pin.

Size: L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3


±0.5

CHK'D BY FENG

APPR BY ZHAN



0.80mm Pin Header Double Layer, Straight Pin, 2xN Pin

THIRD ANGLE PROJECTION





RHTAY18K-2-XX-S-L1xL2xL3-G0


RoHS Compliance

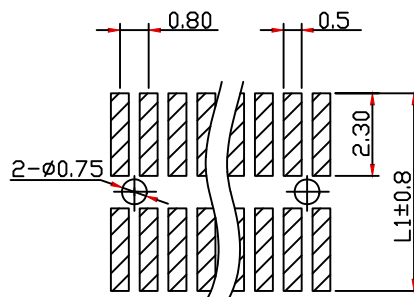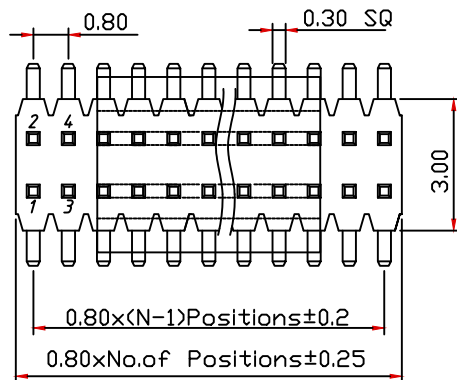

Recommended P.C.B Hole Layout

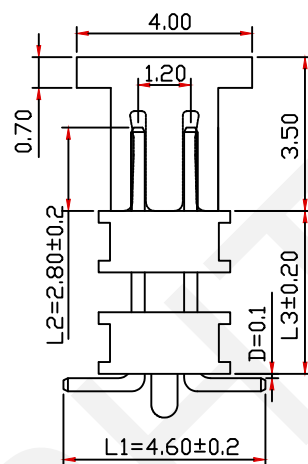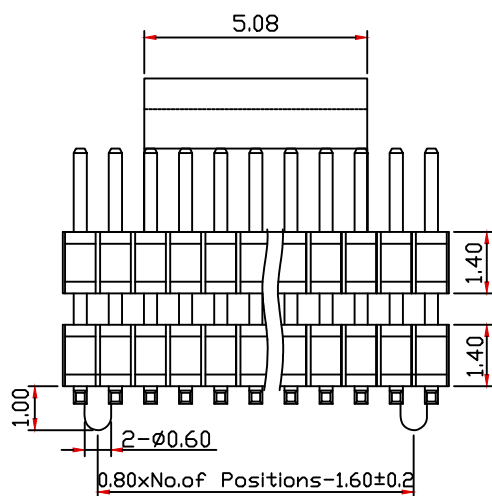

W=With Post

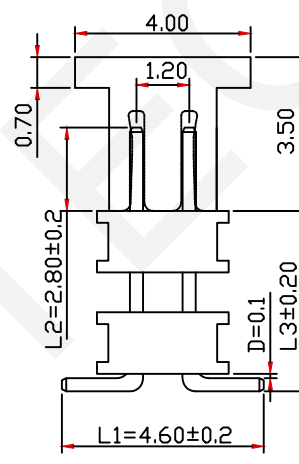

N=W/D Post

Dimension Antitheses List (mm)					
ITEM	L1	L2	L3	D	Plastic Height
Standard	4.60	2.80	---	0.1	1.40
Nonstandard	---	---	---	---	---

Material:
Standard: PA9T
Contact: Phosphor Bronze
Electrical Characteristics:
Rated Current: 0.75AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature: -40°C~+105°C
Max.Processing Temp:230°C For30-60
Seconds(260°C For10 Seconds)

Order Information:

RHTAY18K-2-XX-L1xL2xL3xD-G0-W-R

Pin Header Series
07S:0.80mm
Per Row:Double Layer
Pin: No. Of Pins (02~100)
Size:L2xL4xW
Plating:
G0=Gold Flash G1=1u" Gold G10=10u"
Gold G15=15u" Gold G30=30u" Gold
Post:W=With Post N=W/D Post
Packing:
0=PE Bag A=Tray T=Tube
P=Tube+Cap R=Reel+Cap



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

0.80mm Pin Header Double Layer,SMT Pin, 2xN Pin	
THIRD ANGLE PROJECTION	RHTAY18K-2-XX-L1xL2xL3xD-G0-W-R