


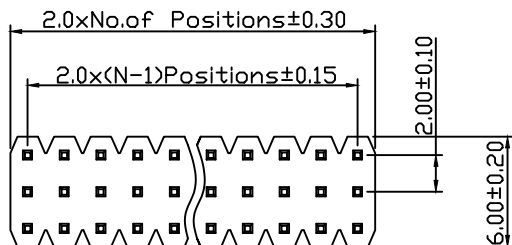


RoHS Compliance

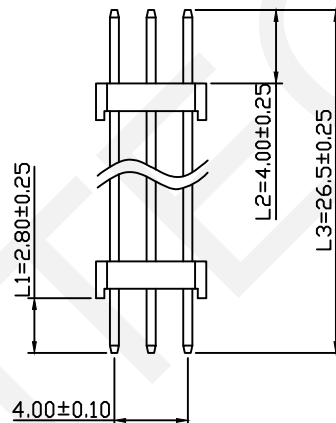

Recommended P.C.Board Layout
PCB TOLERANCE±0.05(TOP VIEW)

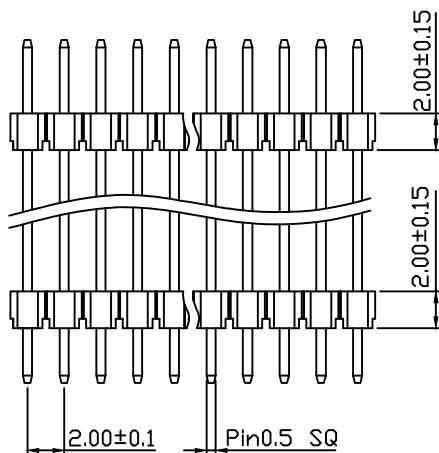

Dimension Antitheses List (mm)

ITEM	L1	L2	L3	Plastic Height
Standard	2.80	4.00	26.5	2.00
Nonstandard	---	---	---	---

Material:

Standard: PA6T

Contact: Brass,Au Or Sn Over 40u" Ni

Insulator:Polyester,UL94V-0

Electrical Characteristics:

Rated Current: 1.5AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max.Processing Temp:180°C For30-60

Seconds(200°C For10 Seconds)

Order Information:

RHTAY18BF-2.00-3-XX-S-L1xL2xL3-G0

Pin Header Series

18BF:2.00mm

Plastics Height:

1.50mm,2.00mm

Per Row:Three Layer

Pin:No. Of Pins(03~120)

Type: Straight Pin

Size:L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3


±0.5

CHK'D BY FENG

APPR BY ZHAN



2.00mm Pin Header Three Layer,
Straight Pin 3xN Pin

THIRD ANGLE PROJECTION





RHTAY18BF-2.00-3-XX-S-L1xL2xL3-G0

RoHS Compliance

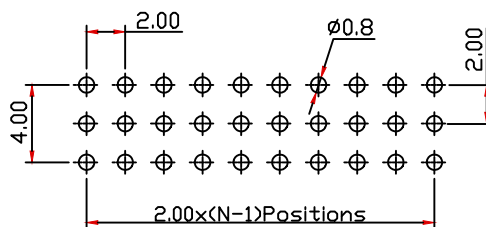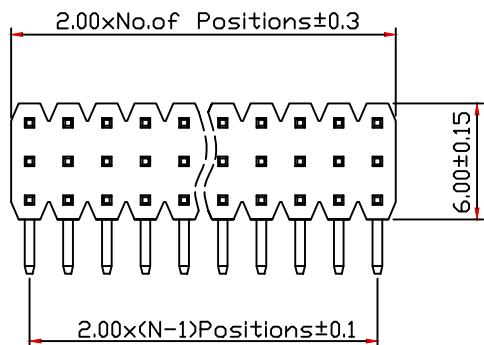

Recommended P.C.Board Layout
PCB TOLERANCE ± 0.05 (TOP VIEW)

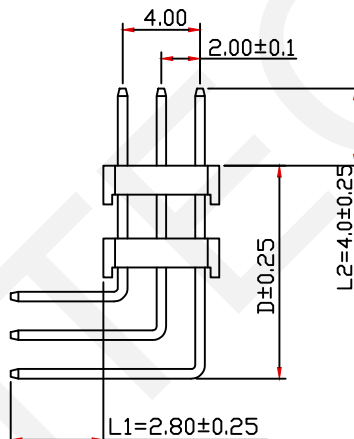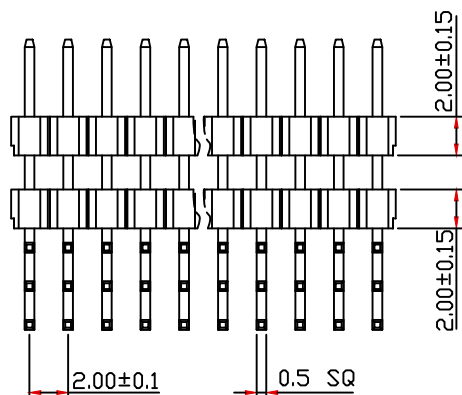

R2 Type

Dimension Antitheses List (mm)

ITEM	L1	L2	D	Plastic Height
Standard	2.80	4.00	---	2.00
Nonstandard	---	---	---	---

Material:

Standard: PA6T

Contact: Brass, Au or Sn Over $40\mu''$ Ni

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.5AMP

Contact Resistance: $20m\Omega$ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: $1000M\Omega$ Min

Mechanical

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Max. Processing Temp: 180°C For 30-60

Seconds (200°C For 10 Seconds)

Order Information:

RHTAY18BF-2.00-3-XX-R2-L1xL2xD-G0

Pin Header Series

18BF: 2.00mm

Plastics Height:

1.50mm, 2.00mm

Per Row: Three Layer

Pin: No. of Pins (03~120)

Right Angle Pin: R2 Type

Size: L1xL2xD

Plating:

G0=Gold Flash G1= $1\mu''$ Gold

G10= $10\mu''$ Gold G15= $15\mu''$ Gold

G30= $30\mu''$ Gold



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

± 0.12

± 0.15


± 0.3

± 0.5

APPR BY ZHAN

2.00mm Pin Header Three Layer,
Right Angle Pin ,3xN Pin

THIRD ANGLE PROJECTION



RHTAY18BF-2.00-3-XX-R2-L1xL2xD-G0