

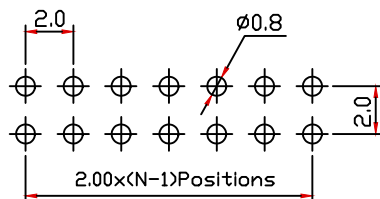
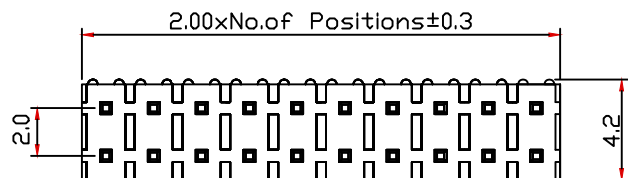


RoHS Compliance



Recommended P.C.B Hole Layout

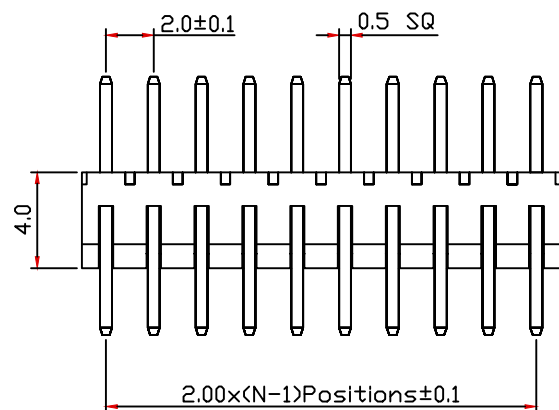

Dimension Antitheses List (mm)

ITEM	L1	L2	L3	Plastic Height
Standard	2.8	4.0	10.8	4.0
Nonstandard	---	---	---	---

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.5AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max. Processing Temp: 240°C For 30-60 Seconds (260°C For 10 Seconds)

Order Information:

RHTAY07BC-2-XX-S-L1xL2xL3-G0

Pin Header Series

07BC: 2.00mm

Per Row: Double Layer

Pin: No. Of Pins (02~80)

Type: Straight Pin

Size: L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



2.00mm Pin Header Double Layer,
Straight Pin 2xN Pin

THIRD ANGLE PROJECTION





RHTAY07BC-2-XX-S-L1xL2xL3-G0

RoHS Compliance

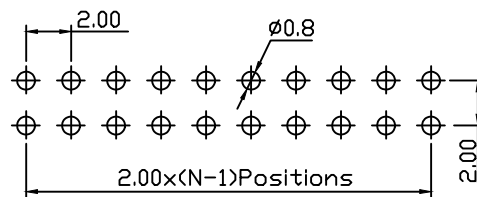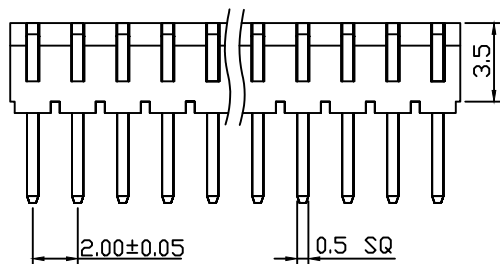

Recommended P.C.B Hole Layout

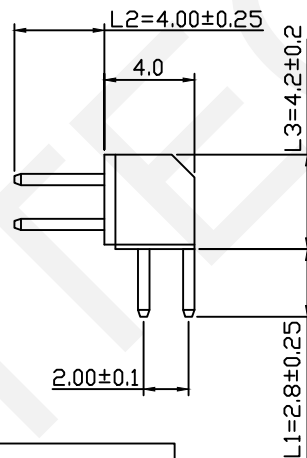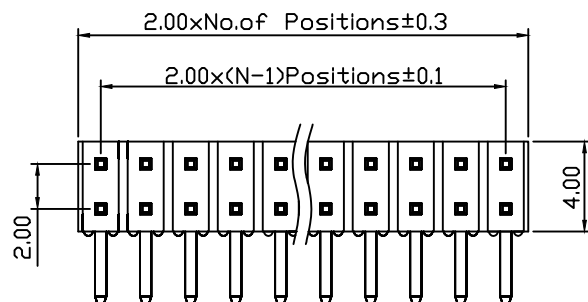

Dimension Antitheses List (mm)				
ITEM	L1	L2	L3	Plastic Height
Standard	2.80	4.00	4.20	4.00
Nonstandard	---	---	---	---

Material:

Standard: PA6T

Contact: Brass

Insulator: Polyester, UL94V-0

Electrical Characteristics:

Rated Current: 1.5AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Max. Processing Temp: 240°C For 30-60

Seconds (260°C For 10 Seconds)

Order Information:

RHTAY07BC-2-XX-R-L1xL2xL3-G0

Pin Header Series

07BC: 2.00mm

Per Row: Double Layer

Pin: No. of Pins (02~80)

Type: Right Angle Pin

Size: L1xL2xL3

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



2.00mm Pin Header Double Layer,
Right Angle Pin, 2xN Pin

THIRD ANGLE PROJECTION





RHTAY07BC-2-XX-R-L1xL2xL3-G0

RoHS Compliance

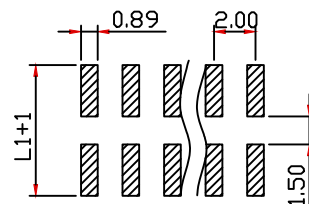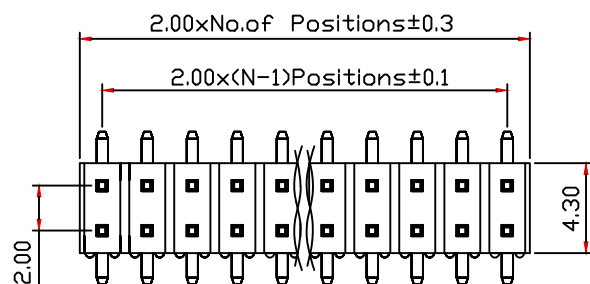

Recommended P.C.B Hole Layout

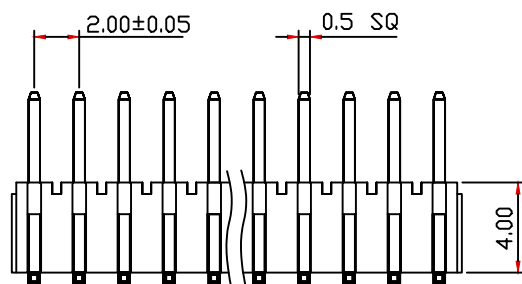

Material:
Standard: PA6T
Contact: Brass
Insulator: Polyester, UL94V-0
Electrical Characteristics:
Rated Current: 1.5AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature: -40°C~+105°C
Max. Processing Temp: 240°C For 30-60
Seconds (260°C For 10 Seconds)

Order Information:
RHTAY07BC-2-XX-T-L1xL2xL3xD-G0

Pin Header Series
07BC: 2.00mm
Per Row: Double Layer
Pin: No. of Pins (02~80)
Type: SMT Pin
Size: L1xL2xL3xD
Plating:
G0=Gold Flash G1=1u" Gold
G10=10u" Gold G15=15u" Gold
G30=30u" Gold

Dimension Antitheses List (mm)

ITEM	L1	L2	L3	D	Plastic Height
Standard	6.50	4.00	4.60	0.10	4.00
Nonstandard	---	---	---	---	---

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG	APPR BY ZHAN		

2.00mm Pin Header Double Layer, SMT Pin ,2xN Pin	
THIRD ANGLE PROJECTION	RHTAY07BC-2-XX-T-L1xL2xL3xD-G0



NINGBO RHT ELECTRONIC CO.,LTD