


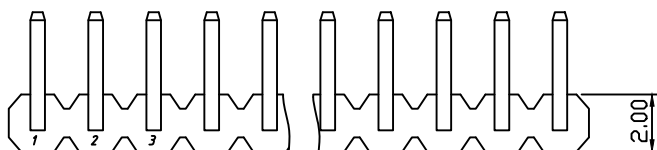


RoHS Compliance



Recommended P.C.B Hole Layout

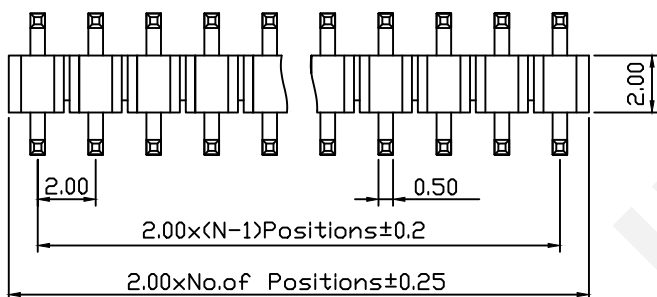

Dimension Antitheses List (mm)

ITEM	L1	L2	Plastic Height
Standard	2.80	4.00	2.00
Nonstandard	---	---	---

Material:

Standard: PA6T,UL94V-0

Contact: Brass

Electrical Characteristics:

Rated Current: 2AMP

Contact Resistance: 20mΩ Max

Withstand Voltage: 500V AC/DC

Insulator Resistance: 1000MΩ Min

Mechanical

Operating Temperature: -40°C~+105°C

Order Information:

RHTAY07BE-1-XX-R-L1xL2-G0

Pin Header Series

07BE:2.00mm

Per Row:Single Layer

Pin: No. Of Pins(1x40)

Type:Right Angle Pin

Size:L1xL2

Plating:

G0=Gold Flash G1=1u" Gold

G10=10u" Gold G15=15u" Gold

G30=30u" Gold



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN



2.00mm Pin Header Single Layer,
Right Angle Pin ,1xN Pin

THIRD ANGLE PROJECTION





RHTAY07BE-1-XX-R-L1xL2-G0

RoHS Compliance

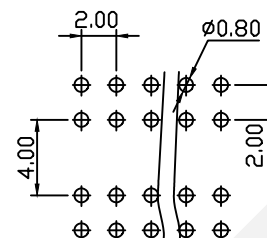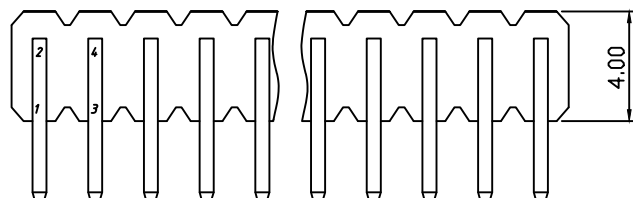

Recommended P.C.B Hole Layout

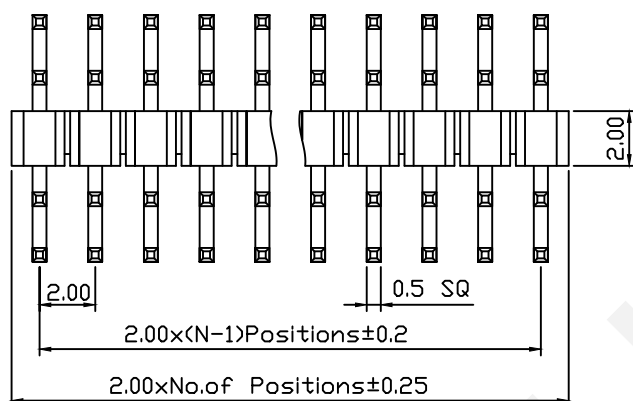

Dimension Antitheses List (mm)			
ITEM	L1	L2	Plastic Height
Standard	2.80	4.00	2.00
Nonstandard	---	---	---

Material:
Standard: PA6T,UL94V-0
Contact: Brass

Electrical Characteristics:
Rated Current: 2AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulator Resistance: 1000MΩ Min
Mechanical
Operating Temperature: -40°C~+105°C

Order Information:
RHTAY07BE-2-XX-R-L1xL2-G0

Pin Header Series—
07BE:2.00mm
Per Row:Double Layer
Pin: No. Of Pins(02~80)
Type:Right Angle Pin
Size:L1xL2
Plating: _____
G0=Gold Flash G1=1u" Gold
G10=10u" Gold G15=15u" Gold
G30=30u" Gold



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

2.00mm Pin Header Double Layer,
Right Angle Pin ,2xN Pin



RHTAY07BE-2-XX-R-L1xL2-G0