



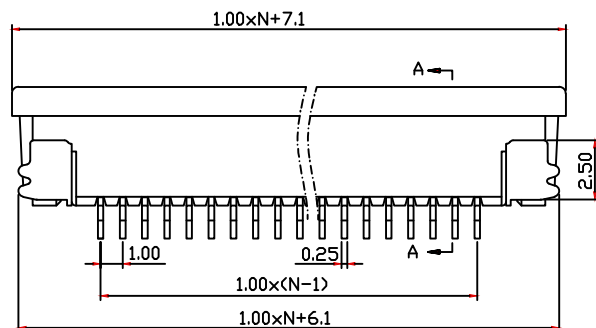




RoHS Compliance



A-A

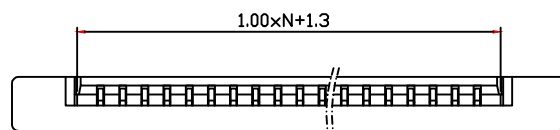

Proper Cable

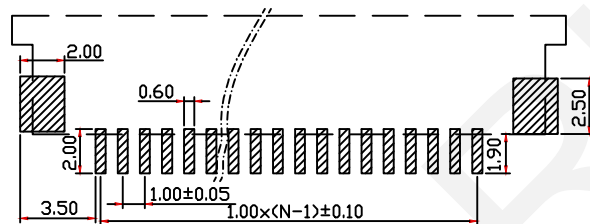

PCB Layout

Material

Housing: LCP, UL94V-0

Lock: LCP, UL94V-0

Plug Spring: Phosphor Bronze, Gold/Tin

Soldering: Phosphor Bronze, Gold/Tin

Electrical

Voltage Rating: 50 V

Current Rating: 0.5 A

Withstanding Voltage: 500 V

Insulation Resistance: 800MΩ.Min

Contact resistance: 20 mΩ.Max.

Mechanical

Temp. Range: -25°C~+85°C

Order Information:

RHTAY240D-2.5-XX-T-U-R

Series No.

No. of pins

(04~35 pins)

Horizontal SMT Pin

Upper Contact

Pack: R-Reel T-Tube

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN




CONN FFC 1.00mm, SMD, Horizontal,
Upper Contact, With ZIF

THIRD ANGLE PROJECTION






RHTAY240D-2.5-XX-T-U-R


RoHS Compliance

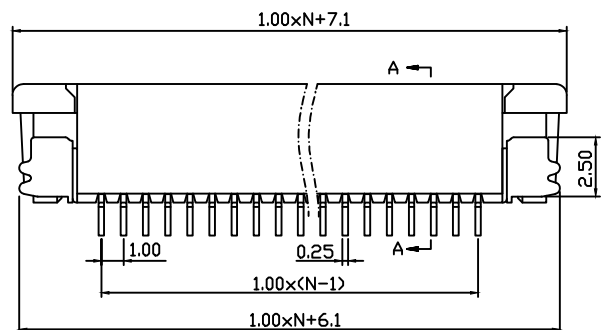

A-A

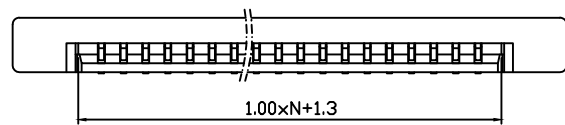

Proper Cable

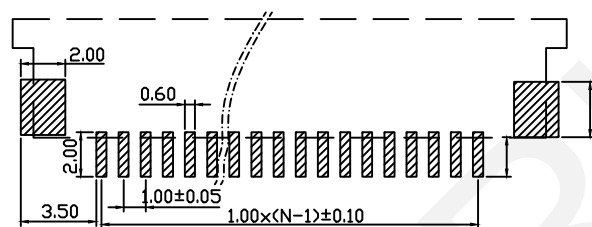

PCB Layout

Material

Housing: LCP, UL94V-0

Lock: LCP, UL94V-0

Plug Spring: Phosphor Bronze, Gold/Tin

Soldering: Phosphor Bronze, Gold/Tin

Electrical

Voltage Rating: 50 V

Current Rating: 0.5 A

Withstanding Voltage: 500 V

Insulation Resistance: 800MΩ.Min

Contact resistance: 20 mΩ.Max.

Mechanical

Temp. Range: -25°C~+85°C

Order Information:

RHTAY240D-2.5-XX-T-L-R

Series No.

No. of pins

(04~35 pins)

Horizontal SMT Pin

Lower Contact

Pack: R-Reel T-Tube

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5

APPR BY ZHAN

CONN FFC 1.00mm, SMD, Horizontal,
Lower Contact, With ZIF

THIRD ANGLE PROJECTION



RHTAY240D-2.5-XX-T-L-R