





RoHS Compliance

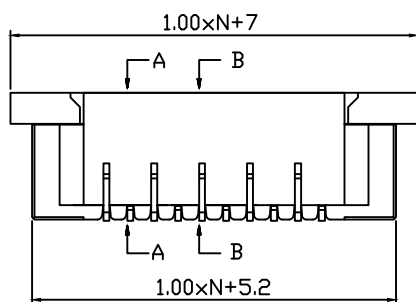

A-A

B-B




Material
Housing: LCP, UL94V-0
Lock: PA46, UL94V-0
Plug Spring: Phosphor Bronze, Gold/Tin

Electrical
Voltage Rating: 50 V
Current Rating: 0.5 A
Withstanding Voltage: 500 V
Insulation Resistance: 800MΩ.Min
Contact resistance: 20 mΩ.Max.


Mechanical
Temp. Range: -25°C~+85°C

Order Information:
RHTAY240E-2.50-XX-R-A-T

Series No. _____
No. of pins (02~35 pins) _____
R-Right angle Pin _____
A-Anti-needle _____
Pack: T-Tube _____

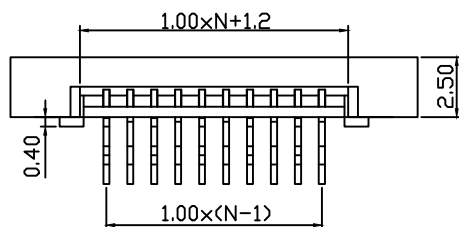

Proper Cable

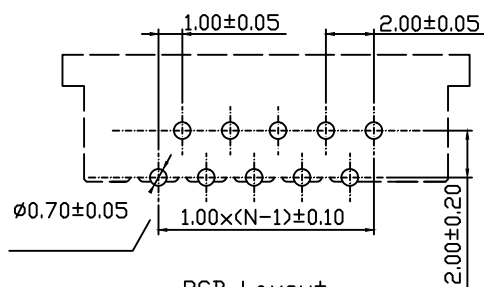

PCB Layout





RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

CONN FFC 1.00mm, Anti-Needle, THR, 180°. with ZIF
THIRD ANGLE PROJECTION
RHTAY240E-2.50-XX-R-A-T

RoHS Compliance

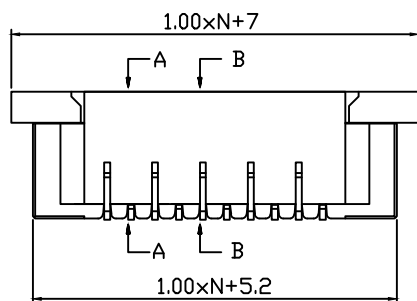

A-A

B-B




Material
Housing: LCP, UL94V-0
Lock: PA46, UL94V-0
Plug Spring: Phosphor Bronze, Gold/Tin

Electrical
Voltage Rating: 50 V
Current Rating: 0.5 A
Withstanding Voltage: 500 V
Insulation Resistance: 800MΩ.Min
Contact resistance: 20 mΩ.Max.


Mechanical
Temp. Range: -25°C~+85°C

Order Information:
RHTAY240E-2.50-XX-R-P-T

Series No. _____
No. of pins (02~35 pins) _____
R-Right angle Pin _____
P-Positive Needle _____
Pack: T-Tube _____

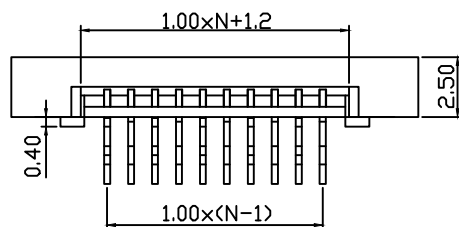

Proper Cable

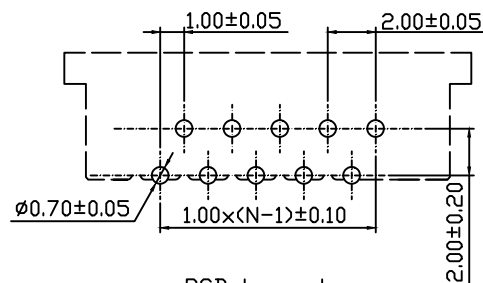

PCB Layout

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 1.00mm, Positive
Needle, THR, 180°, with ZIF

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY240E-2.50-XX-R-P-T


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9