
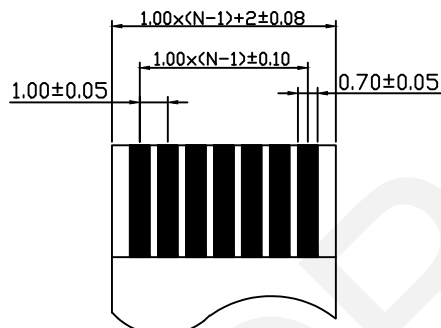



RoHS Compliance

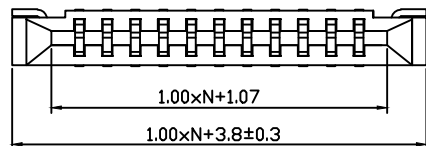


Material
Housing: LCP, UL94V-0
Contacts: Phosphor Bronze, Tin

Electrical
Voltage Rating: 50 V
Current Rating: 1A
Withstanding Voltage: 200 V
Insulation Resistance: 800MΩ.Min
Contact resistance: 40 mΩ.Max.




Mechanical
Temp. Range: -25°C~+85°C

Order Information:
RHTAY240G-2.0-XX-T-R

Series No.
Height: 2.0mm
No. of pins
(04~32 pins)
T-SMT Pin
Pack: R-Reel T-Tube

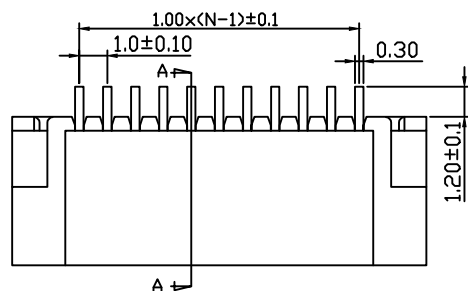

Proper Cable

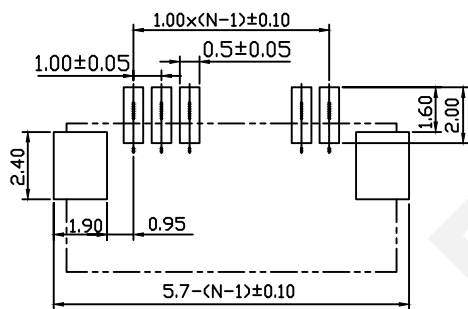

PCB Layout

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

CONN FFC 1.00mm,SMD,Horizontal

THIRD ANGLE PROJECTION

RHTAY240G-2.0-XX-T-R