




RoHS Compliance

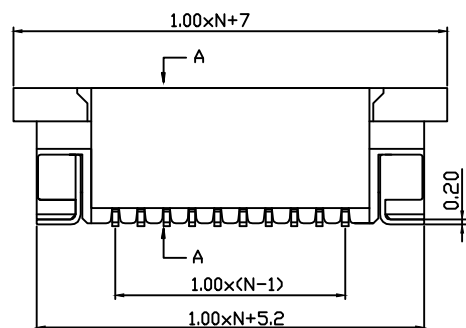

A-A

Material

Housing:LCP UL94V-0

Lock:PA46,UL94V-0

Plug spring:Phosphor Bronze,Gold/Tin

Electrical

Voltage Rating: 50 V

Current Rating: 0.5 A

Withstanding Voltage: 500 V

Insulation Resistance: 800MΩ.Min.

Contact Resistance: 20 mΩ.max.

Mechanical

Temp.Range:-25°C+85°C

Order Information:

RHTAY240H-5.4-XX-T-R




Series No.

Height:5.4mm


No.Of pins(02~30 pins)

Type:T-SMT Pin

Pack:R-Reel T-Tube

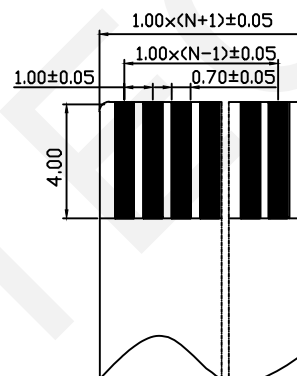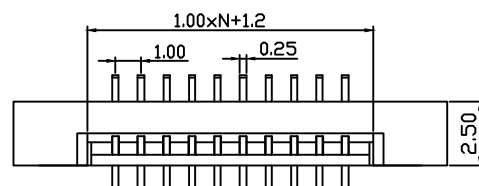

Proper Cable

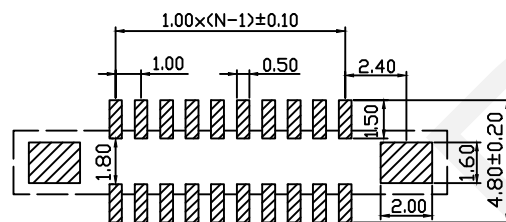

PCB Layout



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN FFC 1.00mm,SMD,Vertical,With ZIF

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY240H-5.4-XX-T-R


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9