
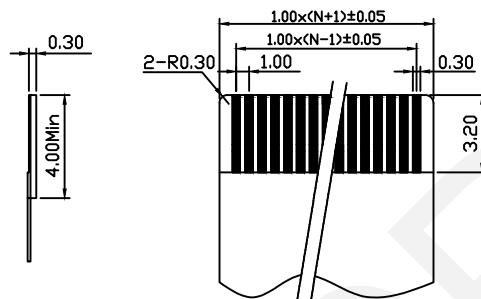


RoHS Compliance

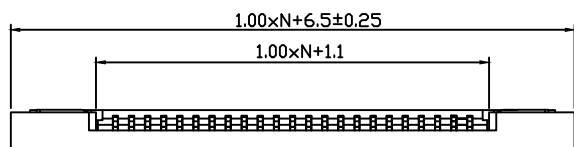

Material
Housing: LCP, UL94V-0
Actuator: LCP, UL94V-0
Contacts: Copper Alloy, Tin Over Nickel
PEG: Copper Alloy, Tin Over Nickel

Electrical
Voltage Rating: 50 V
Current Rating: 0.3 A

Mechanical
Temp. Range: -25°C ~ +85°C

Order Information:

RHTAY240S-1.2-XX-T-U-R

Series No.

Height: 1.2mm




No. of pins

(04~30 pins)

T-SMT Pin

Upper Contact

Pack: R-Reel T-Tube

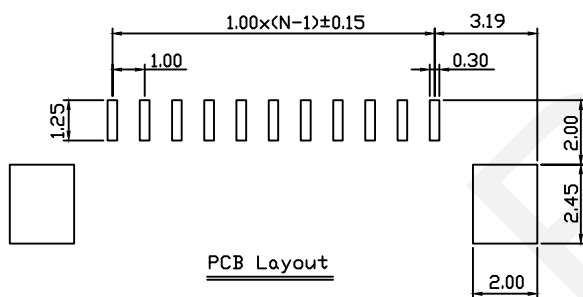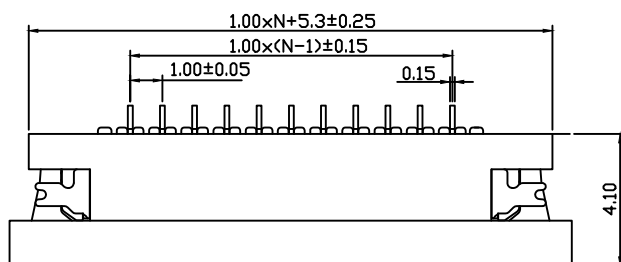

PCB Layout

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

CONN FFC 1.00mm, SMD, Horizontal,
Upper Contact, With ZIF

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY240S-1.2-XX-T-U-R


±0.12

±0.15

±0.3



±0.5

APPR BY ZHAN



NINGBO RHT ELECTRONIC CO., LTD

RoHS Compliance

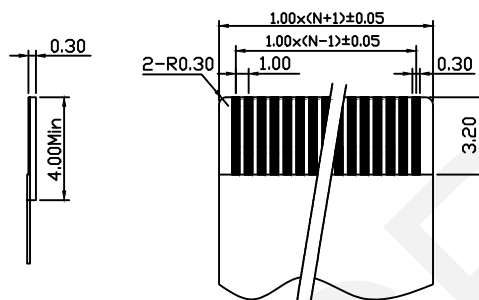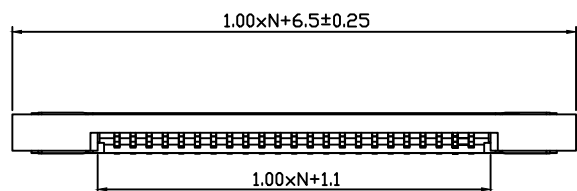

Material
Housing: LCP, UL94V-0
Actuator: LCP, UL94V-0
Contacts: Copper Alloy, Tin Over Nickel
PEG: Copper Alloy, Tin Over Nickel



Electrical
Voltage Rating: 50 V
Current Rating: 0.3 A

Mechanical
Temp. Range: -25°C ~ +85°C


Order Information:

RHTAY240T-1.2-XX-T-L-R

Series No.
Height: 1.2mm
No. of pins
(04~30 pins)
T-SMT Pin
Lower Contact
Pack: R-Reel T-Tube

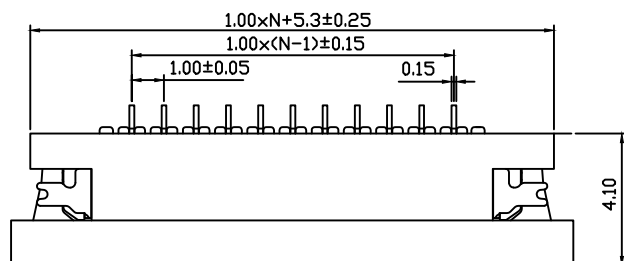

Proper Cable

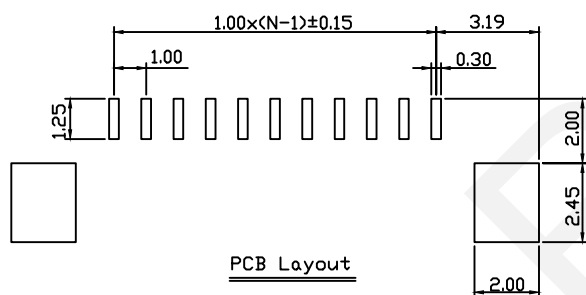

PCB Layout



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

CONN FFC 1.00mm, SMD, Horizontal,
Lower Contact, With ZIF

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTAY240T-1.2-XX-T-U-R


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9